

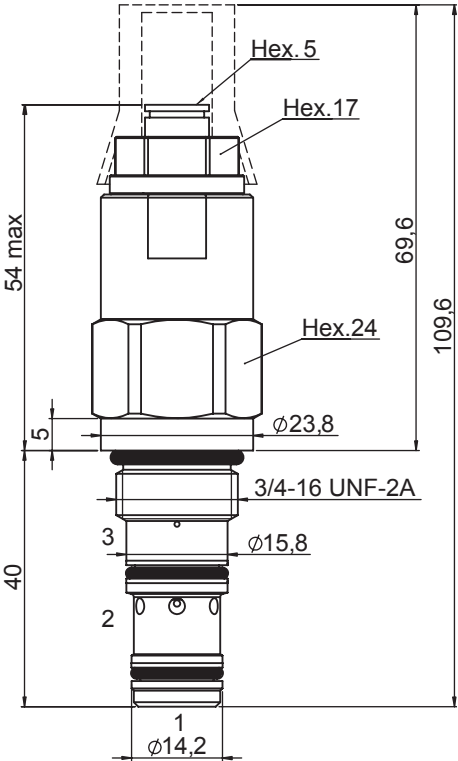


NOT COMPENSATED COUNTERBALANCE VALVE

- Flow. 40 l/min
- Max working pressure. 350 bar
- Compensation. Not compensated
- Cartridge tightening torque. 40-45 Nm
- Seal lock nut tightening torque. 15-20 Nm
- Weight. 0,2 Kg
- Tamper proof cap cod. 4029250280
- To be ordered separately only for version 0-prearranged
- Cavity C321000 page 219
- Body single cavity. 172212 page 188
- Body double cavity 176212 page 189

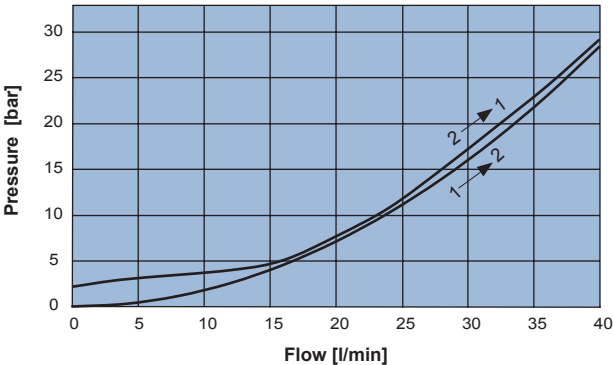

Note
-Setting: 1,3 times the maximum load induced pressure.
-The back pressure (2) may affect the relief function
(for circuits with back pressure use 0612.1 or 0612.2).

Ordering code

0 6 1 2 0 0 0

PILOT RATIO		SPRINGS		TAMPER PROOF OPTION	
5	5:1	2	3	PRE-ARRANGED	0
		Setting range [bar]	120 - 210 170 - 350	NOT PRE-ARRANGED	2
		Pressure Increase [bar/turn]	35 60		
		Standard setting 4 l/min [bar]	210 350		