

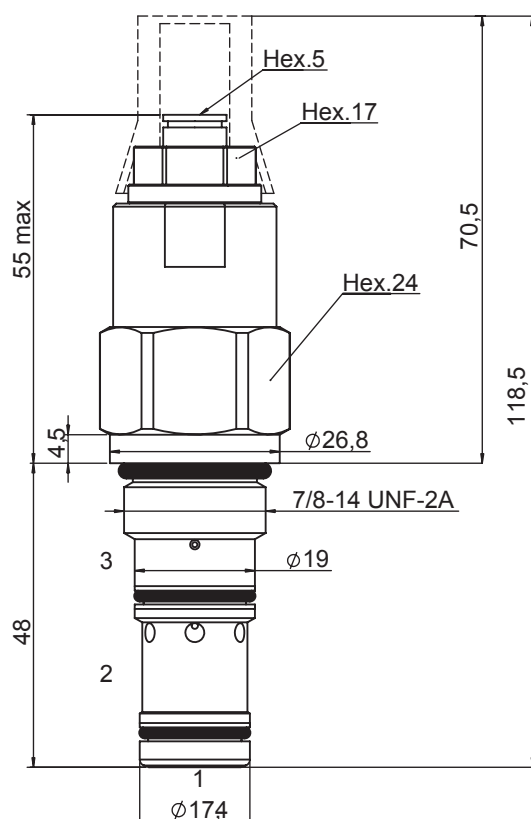


NOT COMPENSATED COUNTERBALANCE VALVE

- Flow. **70 l/min**
- Max working pressure. **350 bar**
- Compensation. **Not compensated**
- Cartridge tightening torque. **50-55 Nm**
- Seal lock nut tightening torque. **15-20 Nm**
- Weight. **0,3 Kg**
- Tamper proof cap **cod. 4029250280**
- **To be ordered separately only for version 0-predisposed**
- Cavity **C331000** page **221**
- Body single cavity. **172312** page **193**
- Body double cavity **176312** page **194**

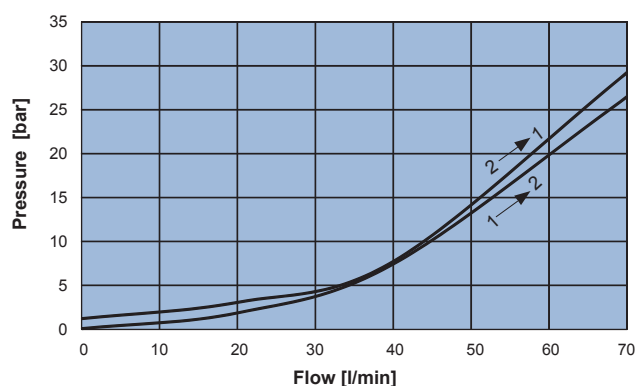

Note

-Setting: 1,3 times the maximum load induced pressure.

-The back pressure (2) may affect the relief function (for circuits with back pressure use 0613.1 or 0613.2).

Ordering code

0 6 1 3 0 0 0

PILOT RATIO	
3	3,5:1
8	8:1

SPRINGS	2	3
Setting range [bar]	80 - 210	180 - 350
Pressure Increase [bar/turn]	37	47
Standard setting 4 l/min [bar]	210	350

TAMPER PROOF OPTION	
PRE-ARRANGED	0
NOT PRE-ARRANGED	2

