


RELIEF COMPENSATED COUNTERBALANCE VALVE

- Flow. . . . . .**70 l/min**
- Max working pressure. . . . . **350 bar**
- Compensation. . . . . **Relief compensated**
- Cartridge tightening torque. . . . . **50-55 Nm**
- Seal lock nut tightening torque. . . . . **15-20 Nm**
- Weight. . . . . **0,3 Kg**
- Tamper proof cap . . . . . .**cod. 4029250280**
  To be ordered separately only for version 0-prearranged
- Cavity . . . . . **C331000** page **221**
- Body single cavity. . . . . **172312** page **193**
- Body double cavity . . . . . **176312** page **194**



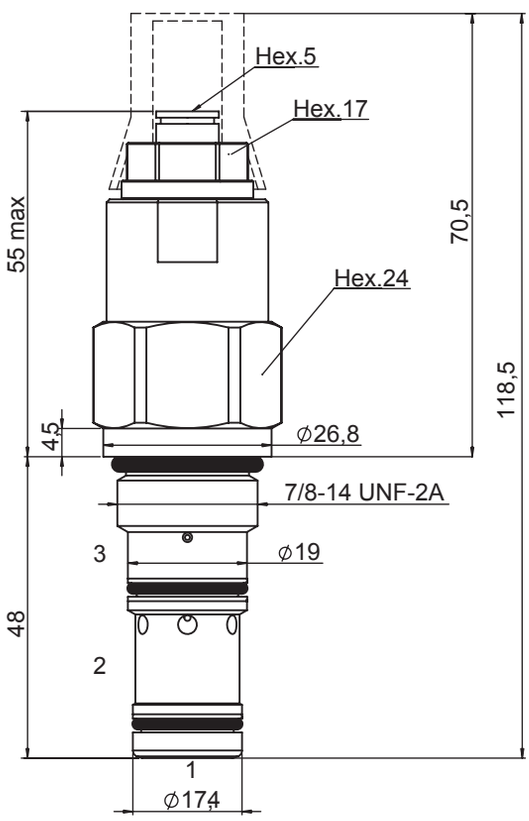

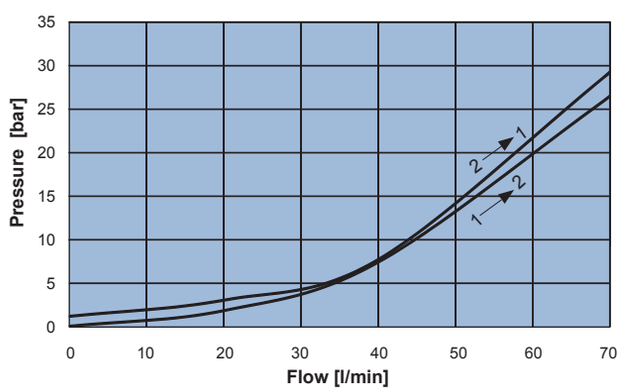

Note:
-Setting: 1,3 times the maximum load induced pressure.

Ordering code

0 6 1 3 2 □ □ □ 0 0

PILOT RATIO	
3	**3,5:1**

SPRINGS	2	3
Setting range [bar]	80 - 210	180 - 350
Pressure Increase [bar/turn]	37	47
Standard setting 4 l/min [bar]	210	350

TAMPER PROOF OPTION	
PRE-ARRANGED	0
NOT PRE-ARRANGED	2