

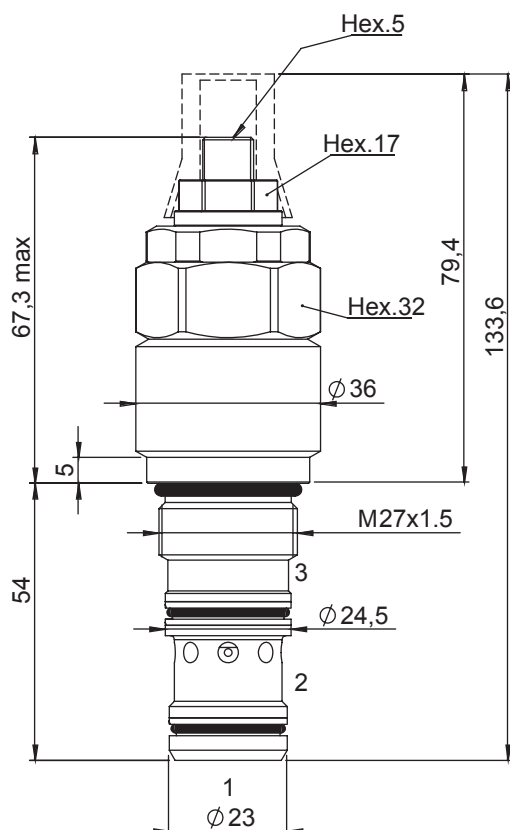


NOT COMPENSATED COUNTERBALANCE VALVE

- Flow. **100 l/min**
- Max working pressure. **410 bar**
- Compensation. **Not compensated**
- Cartridge tightening torque. **60 Nm**
- Seal lock nut tightening torque. **15-20 Nm**
- Weight. **0,7 Kg**
- Tamper proof cap **cod. 4029250280**
- Cavity **M340000** page 234

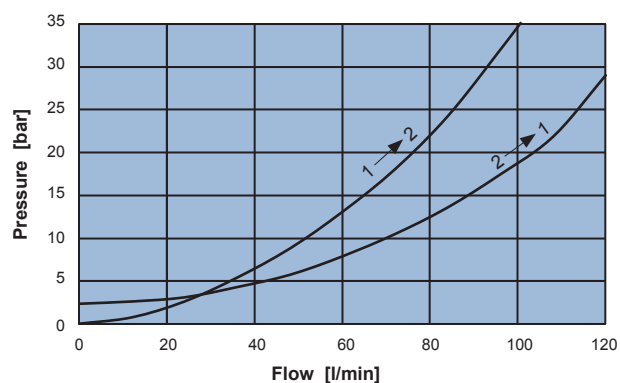

Note:

-Setting: 1,3 times the maximum load induced pressure.

-The back pressure (2) may affect the relief function (for circuits with back pressure use 0.6441 o 0.6442).

Ordering code

0 6 4 4 0 5 5 0 0 0

PILOT RATIO	
5	5:1

SPRINGS	4
Setting range [bar]	230 - 410
Pressure Increase [bar/turn]	34
Standard setting 4 l/min [bar]	350