

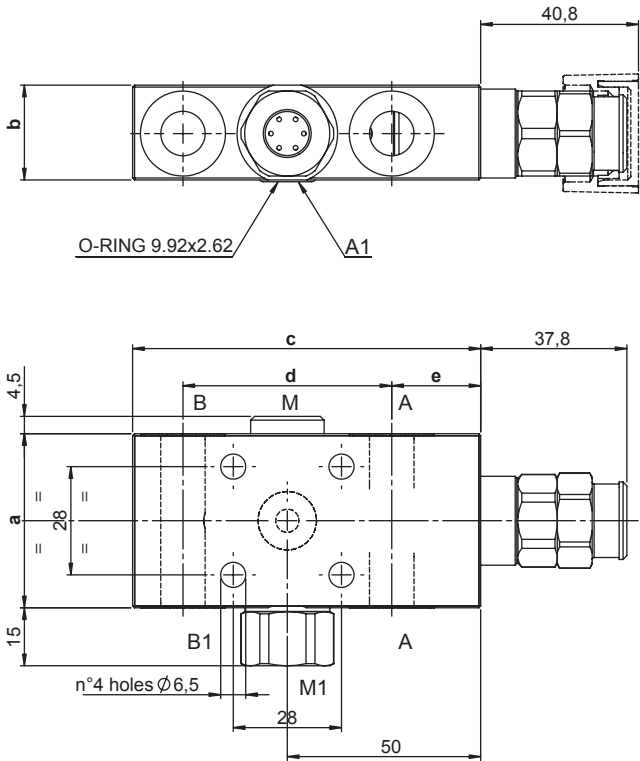


SINGLE ACTING COUNTERBALANCE VALVE FLANGED 28x28

- Flow.....40 l/min
- Max working pressure.....350 bar
- Compensation.....Not Compensated
- Weight G 1/4".....0,8 Kg
- Weight G 3/8".....1 Kg
- Tamper proof cap.....cod. 9021030190

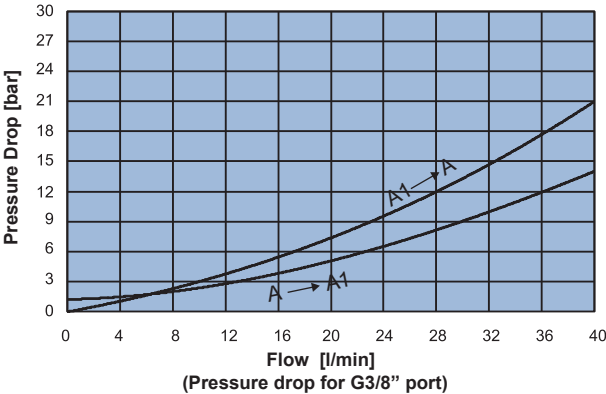

Note:
- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD03X-C is recommended for circuits with high back pressure)

	a	b	c	d	e
02	45	24,5	90	54	23
03	50	29,5	95	59	21

Ordering code

H 3 0 0 5 N S 0 0

PILOT RATIO		SPRINGS		PORTS	
43	4:1	2	3	02	03
		Setting range min.-max. [bar]	80 - 210 150 - 350	A,B,B1	G 1/4" G 3/8"
		Pressure Increase [bar/turn]	41 100	A1	Ø 6 Ø 6
		Standard setting 4 l/min [bar]	200 350	M	G 1/4" G 1/4"

