

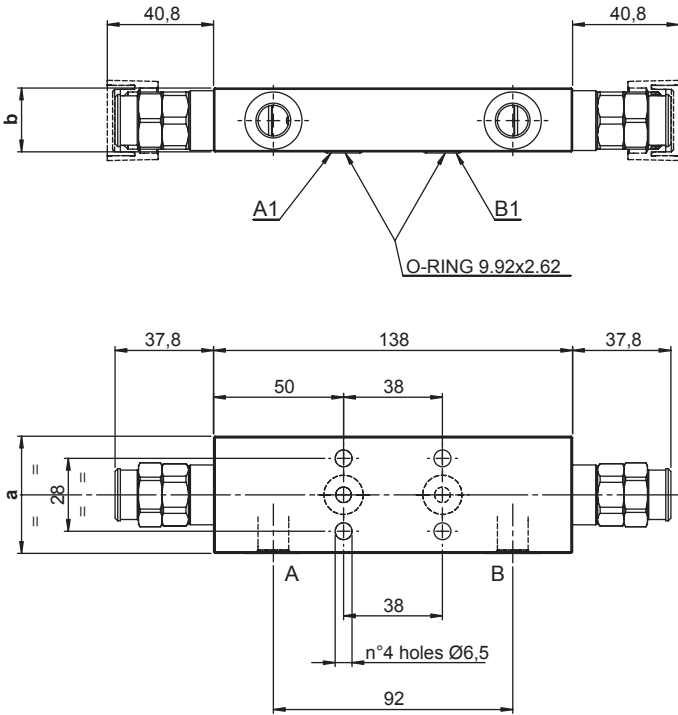


DOUBLE ACTING COUNTERBALANCE VALVE WITH COAXIAL CAVITY - A1/B1 FLANGED 28x38

- Flow.....40 l/min
- Max working pressure.....350 bar
- Compensation.....Not Compensated
- Weight G 1/4".....1,3 Kg
- Weight G 3/8".....1,6 Kg
- Tamper proof cap.....cod. 9021030190

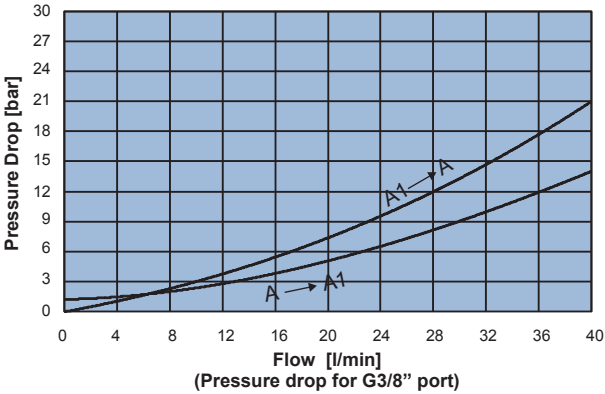

Note:
- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD03X-C is recommended for circuits with high back pressure)

	a	b
02	45	24,5
03	50	29,5

Ordering code

H 3 0 6 2 N S 0 0

PILOT RATIO	
40	4:1

SPRINGS	2	3
Setting range min.-max. [bar]	80 - 210	150 - 350
Pressure Increase [bar/turn]	41	100
Standard setting 4 l/min [bar]	200	350

PORTS	02	03
A,B	G 1/4"	G 3/8"
A1,B1	Ø 6	Ø 6

