

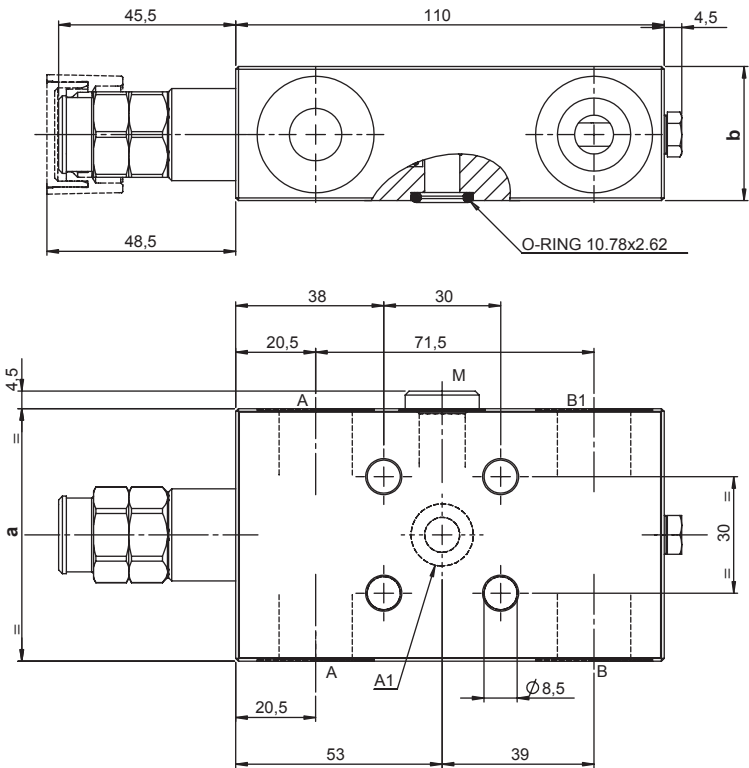


SINGLE ACTING COUNTERBALANCE VALVE FLANGED 30x30

- Flow.....70 l/min
- Max working pressure.....350 bar
- Compensation.....Not Compensated
- Weight G 3/8".....1,3 Kg
- Weight G 1/2".....1,75 Kg
- Tamper proof cap.....cod. 9021030190

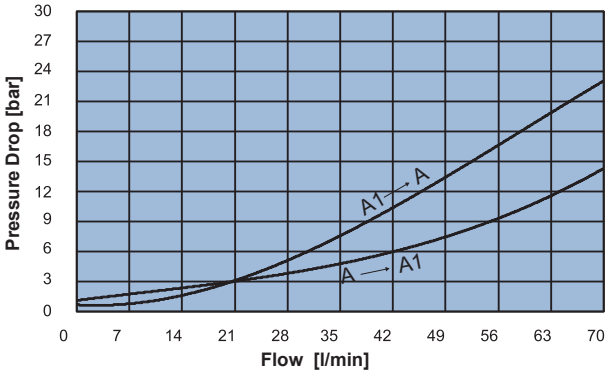

Note:
- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD05X-C is recommended for circuits with high back pressure)

	a	b
03	55	29,5
04	65	34,5

Ordering code

H 5 0 0 5 N S 0 0

PILOT RATIO	
40	4:1

SPRINGS	2	3
Setting range min.-max. [bar]	60 - 210	120 - 350
Pressure Increase [bar/turn]	62	114
Standard setting 4 l/min [bar]	200	350

PORTS	03	04
A,B,B1	G 3/8"	G 1/2"
A1	Ø 9	Ø 9
M	G 1/4"	G 1/4"

