

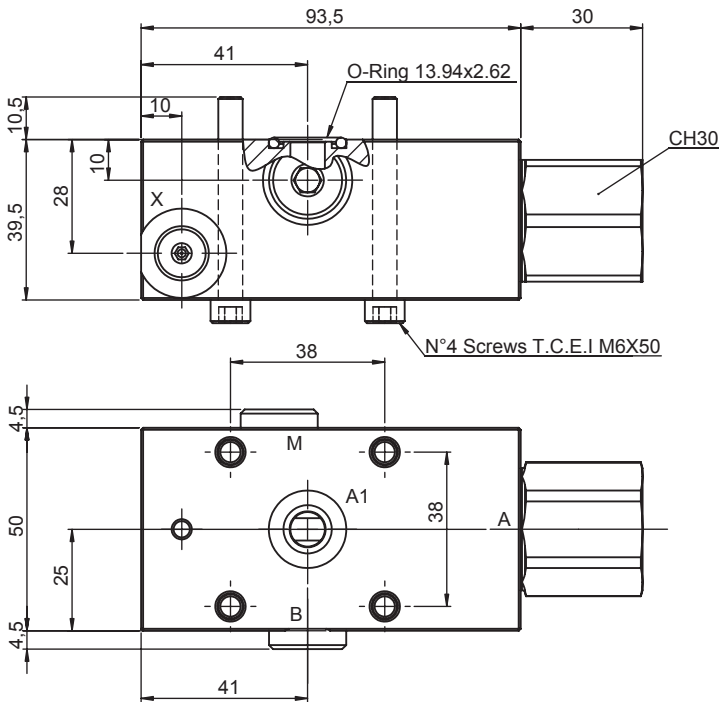


SINGLE ACTING COUNTERBALANCE VALVE FLANGED 38x38 WITH AXIAL DISCHARGE

- Flow.....70 l/min
- Max working pressure.....350 bar
- Compensation.....Not Compensated
- Weight.....1,5 Kg

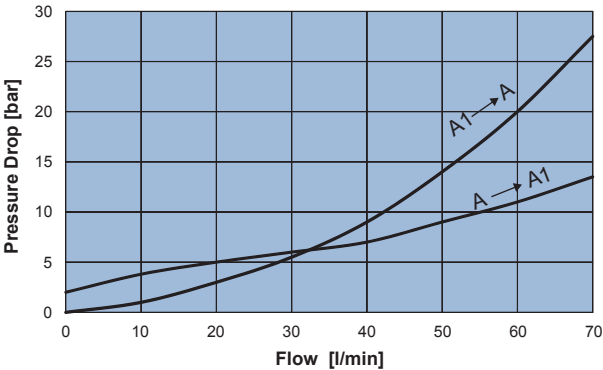

Note:
- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD05X-C is recommended for circuits with high back pressure)

Ordering code

H 5 2 0 2 N S 0 0

RAPPORTO DI PILOTAGGIO	
40	4:1

MOLLE	3
Setting range min.-max. [bar]	211 - 350
Pressure Increase [bar/turn]	120
Standard setting 4 l/min [bar]	350

ATTACCHI	04
A	G 1/2"
B,X,M	G 1/4"
A1	Ø 8.5

