

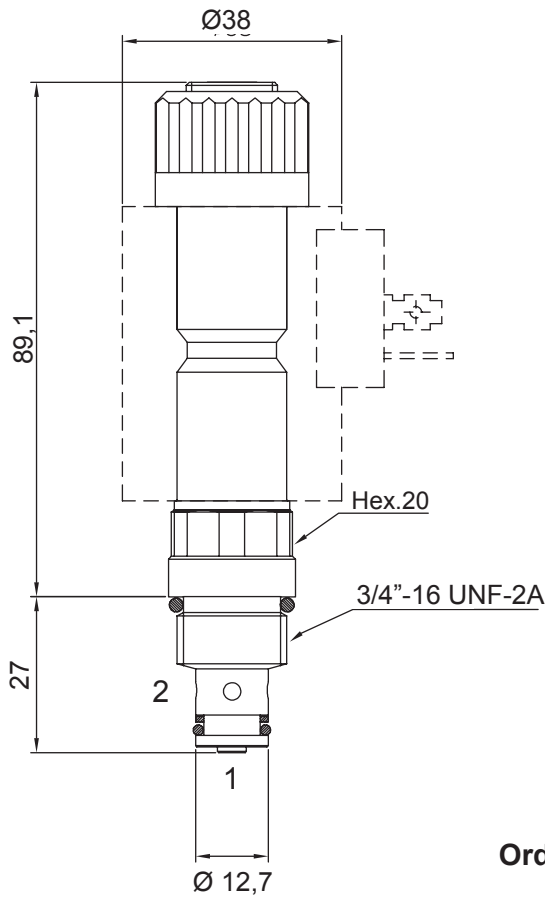
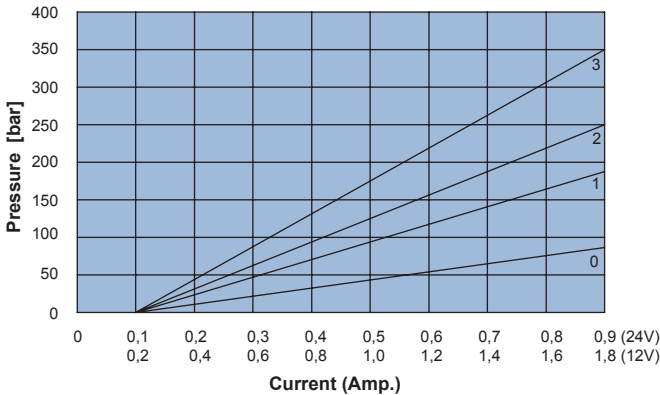


ELECTRO-PROPORTIONAL PRESSURE RELIEF VALVE, DIRECT ACTING

- Flow 2 l/min
- Max working pressure in 1. 350 bar
- Max working pressure in 2. 20 bar
- Seals NBR and PTFE
- Max current at 12 Vcc 1800mA
- Max current at 24 Vcc 900mA
- PWM 120 Hz
- Hysteresis. 5%
- Cartridge tightening torque 30 Nm
- Ring nut tightening torque 4 Nm
- Weight (with coil). 0,46 Kg
- Cavity C220000 page 208
- Body. 171202 page 186
- Coil (to be ordered separately) 09800 page 180

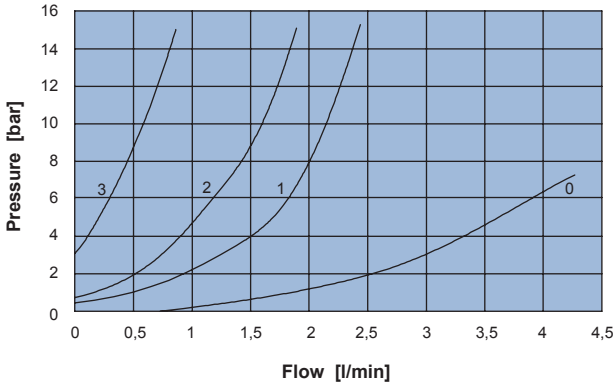

Ordering code

0 0 5 2 0 0 0 0

SETTING RANGE	0	1	2	3
Min - Max [bar]	10 ÷ 80	30 ÷ 150	40 ÷ 250	70 ÷ 350

