ELECTRO-PROPORTIONAL PRESSURE RELIEF VALVE, PILOT OPERATED

- Flow . . . . . **60 l/min**
- Max working pressure. . . . . **350 bar**
- Seals . . . . . **NBR and PTFE**
- Max current at 12 Vcc **1800mA**
- Max current at 24 Vcc **900mA**
- PWM . . . . . **120 Hz**
- Hysteresis. **5%**
- Cartridge tightening torque . . . . . **40 Nm**
- Ring nut tightening torque . . . . . **4 Nm**
- Weight (with coil). . . . . **0,48 Kg**
- Cavity . . . . . **C230000** page **210**
- Body. . . . . **171302** page **191**
- Coil (to be ordered separately) . . . . . **09800** page **180**



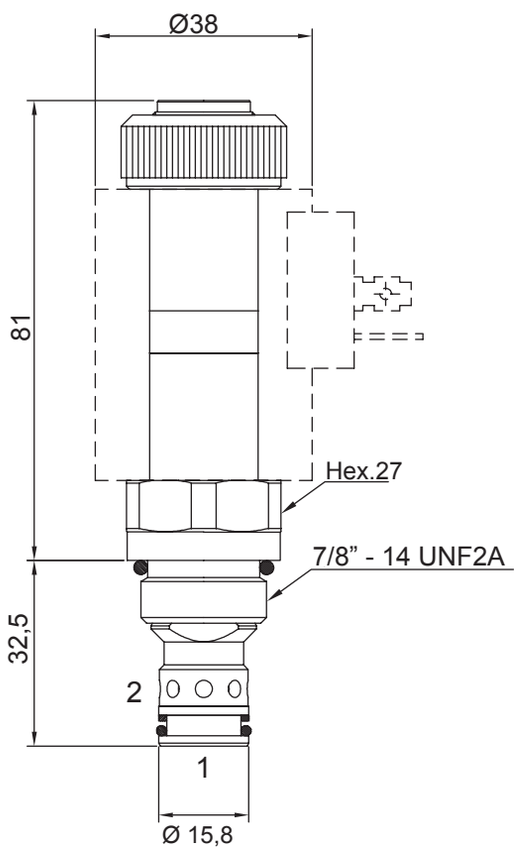

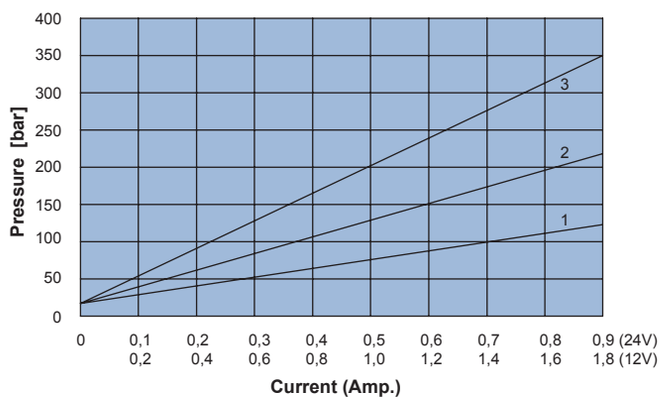

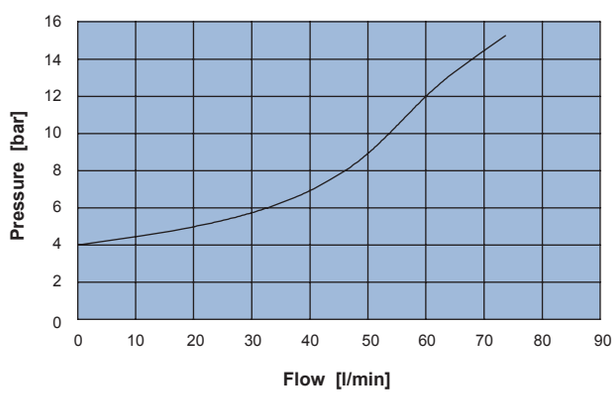

Ordering code

0 0 6 3 0 ☐ 0 ☐ 0 0

SETTING RANGE	1	2	3
Min - Max [bar]	0 ÷ 150	0 ÷ 250	0 ÷ 350

0	1	7
		
No emergency	Push pin	Handknob