## 2 WAY NORMALLY CLOSED SPOOL VALVE, ELECTRO-PROPORTIONAL FLOW CONTROL

- Flow . . . . . **30 l/min**
- Max working pressure in 1:2. . . . . **350 bar**
- Application limits with Δp max from 1 to 2. . . . . **15 bar**
- Leakage . . . . . **150 cc/min**
- Seals . . . . . **NBR and PTFE**
- Max current at 12 Vcc . . . . . **1800mA**
- Max current at 24 Vcc . . . . . **900mA**
- PWM . . . . . **120 Hz**
- Hysteresis. . . . . **5%**
- Cartridge tightening torque . . . . . **40 Nm**
- Ring nut tightening torque . . . . . **4 Nm**
- Weight (with coil). . . . . **0,48 Kg**
- Cavity . . . . . **C230000** page **210**
- Body. . . . . **171302** page **191**
- Coil (to be ordered separately) . . . . . **09800** page **180**




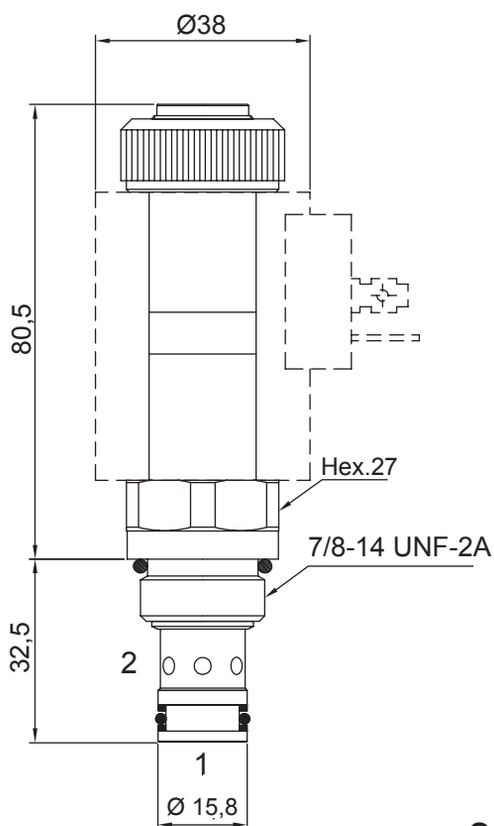


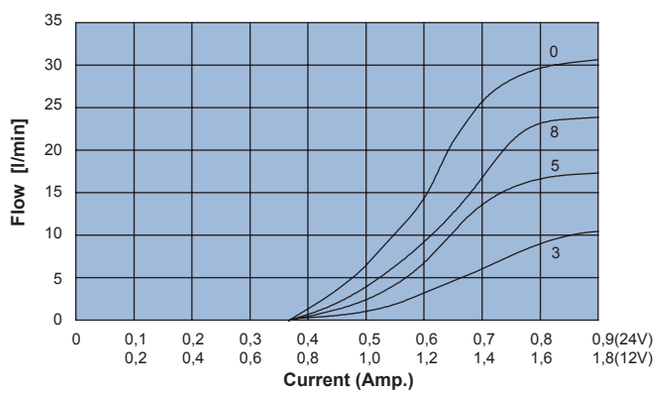


**Graph flow/current with Δp from 1 to 2 of 7 bar**

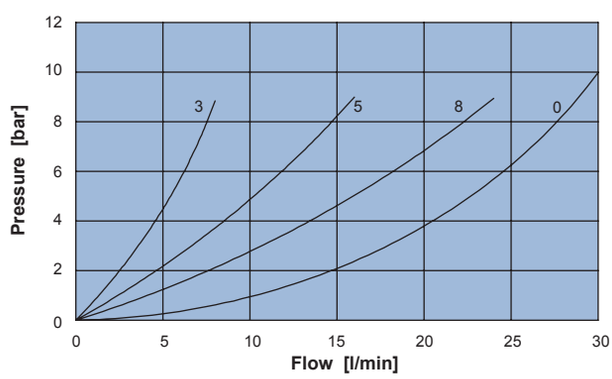


**Pressure drop with energized coil**

### Ordering code

**0 3 4 3 1 ☐ 0 ☐ 0 1**

| | | | | | | |
|---|---|---|---|---|---|---|
| **0** | **3** | **5** | **8** | **0** | **1** | **7** |
| **100% Q.max** | **30% Q.max** | **50% Q.max** | **80% Q.max** | | | |

**Flow range**

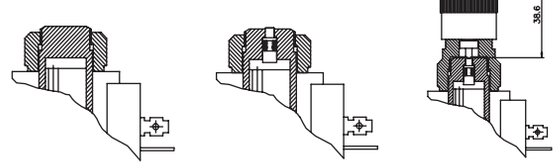

**No emergency** **Push pin** **Handknob**