


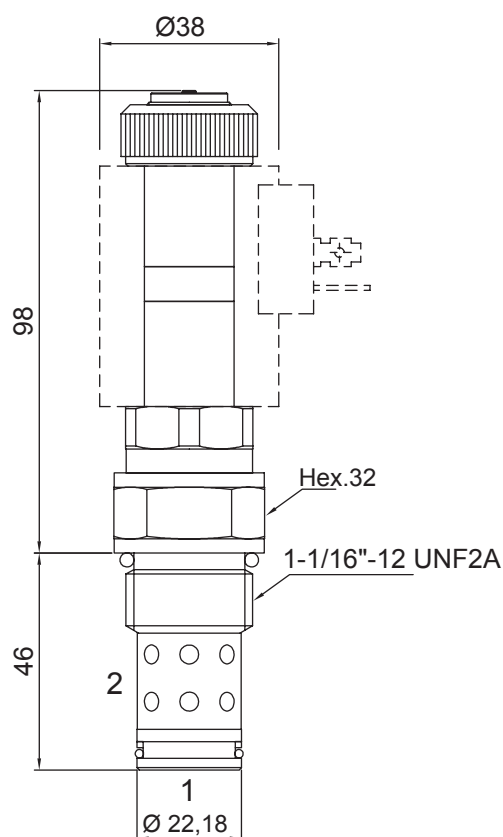


2 WAY NORMALLY CLOSED SPOOL VALVE, ELECTRO-PROPORTIONAL FLOW CONTROL

- Flow **75 l/min**
- Max working pressure in 1:2 **350 bar**
- Application limits with Δp max from 1 to 2 **10 bar**
- Leakage **150 cc/min**
- Seals **NBR and PTFE**
- Max current at 12 Vcc **1800mA**
- Max current at 24 Vcc **900mA**
- PWM **120 Hz**
- Hysteresis **5%**
- Cartridge tightening torque **50 Nm**
- Ring nut tightening torque **4 Nm**
- Weight (with coil) **0,61 Kg**
- Cavity **C240001** page 214
- Coil (to be ordered separately) **09800** page 180

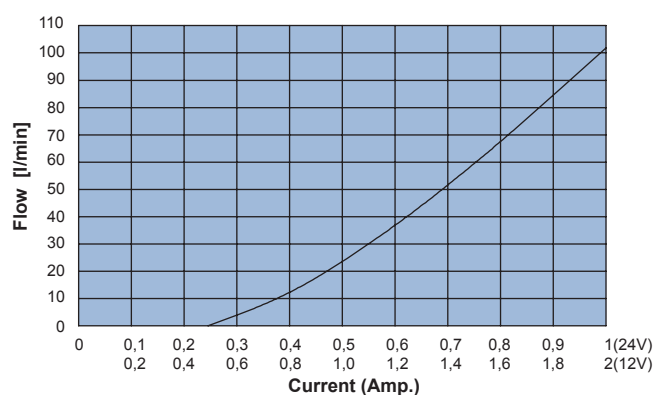

Graph flow/current with Δp from 1 to 2 of 5 bar

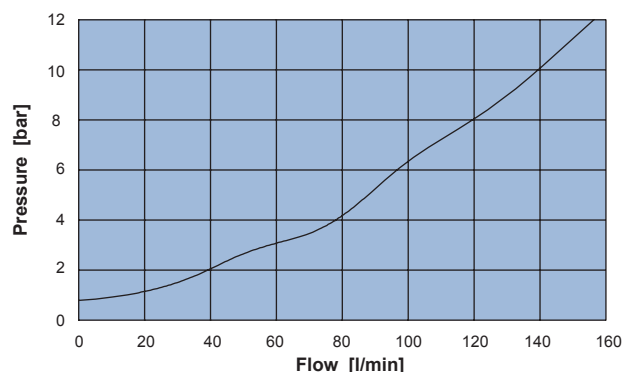

Pressure drop from 1 to 2

Ordering code

0 3 4 4 1 0 0 1

