


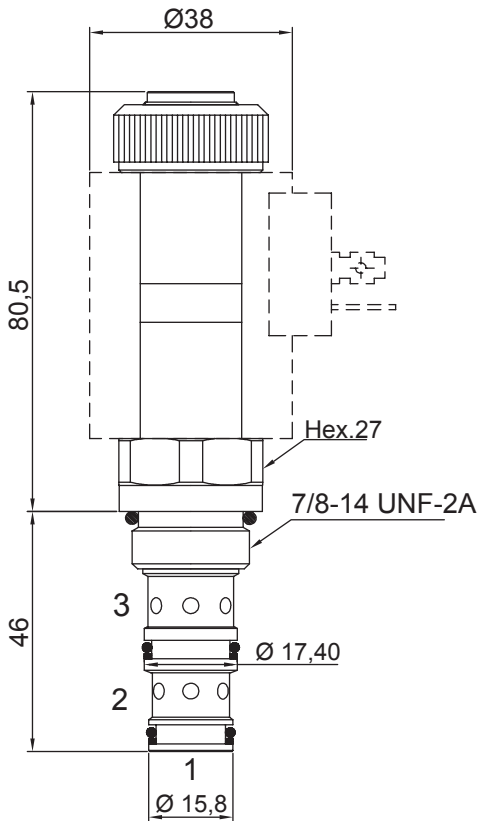


3 WAY NORMALLY OPEN SPOOL VALVE, ELECTRO-PROPORTIONAL FLOW CONTROL

- Flow 30 l/min
- Max working pressure in 1:2:3. 350 bar
- Application limits with Δp max from 2 to 3. 15 bar
- Leakage 150 cc/min
- Seals NBR and PTFE
- Max current at 12 Vcc 1800mA
- Max current at 24 Vcc 900mA
- PWM 120 Hz
- Hysteresis. 5%
- Cartridge tightening torque 40 Nm
- Ring nut tightening torque 4 Nm
- Weight (with coil). 0,56 Kg
- Cavity C330000 page 220
- Body. 171312 page 192
- Coil (to be ordered separately) 09800 page 180

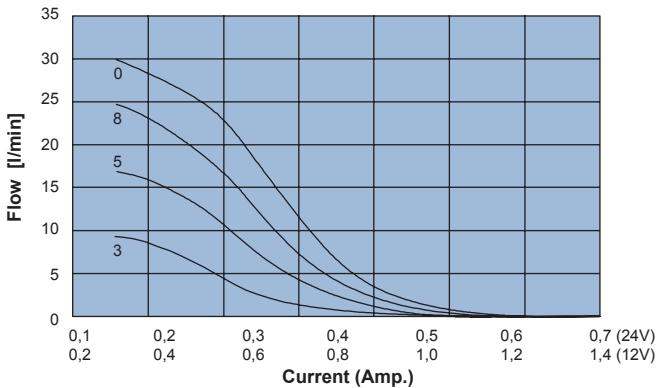

Graph flow/current with Δp from 2 to 3 of 7 bar

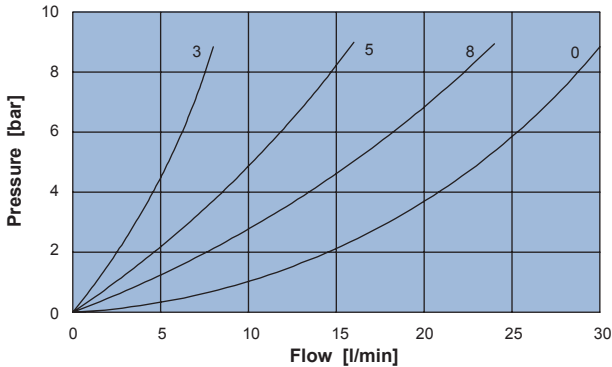

Pressure drop with de-energized coil

Ordering code

0 3 5 3 4 0 0 1

