
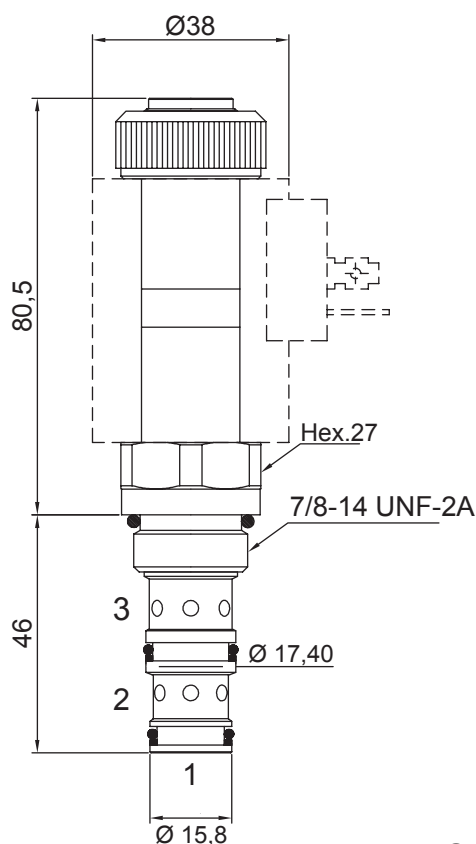
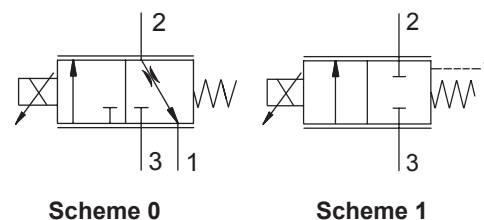
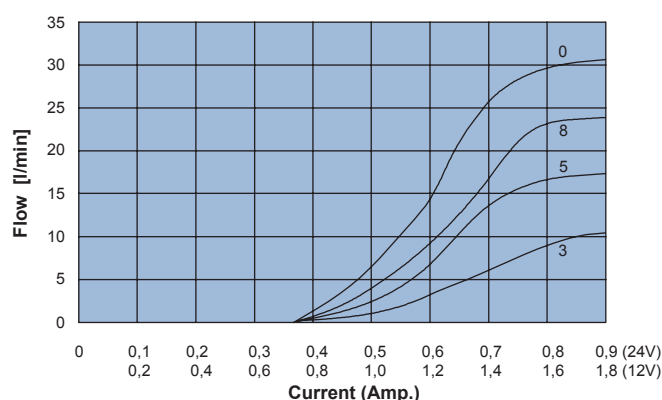


3 WAY NORMALLY CLOSED SPOOL VALVE, ELECTRO-PROPORTIONAL FLOW CONTROL

- Flow **30 l/min**
- Max working pressure in 1:2:3 **350 bar**
- Application limits with Δp max from 3 to 2 **15 bar**
- Leakage **150 cc/min**
- Seals **NBR and PTFE**
- Max current at 12 Vcc **1800mA**
- Max current at 24 Vcc **900mA**
- PWM **120 Hz**
- Hysteresis **5%**
- Cartridge tightening torque **40 Nm**
- Ring nut tightening torque **5 Nm**
- Weight (with coil) **0,56 Kg**
- Cavity **C330000** page 220
- Body **171312** page 192
- Coil (to be ordered separately) **09800** page 180

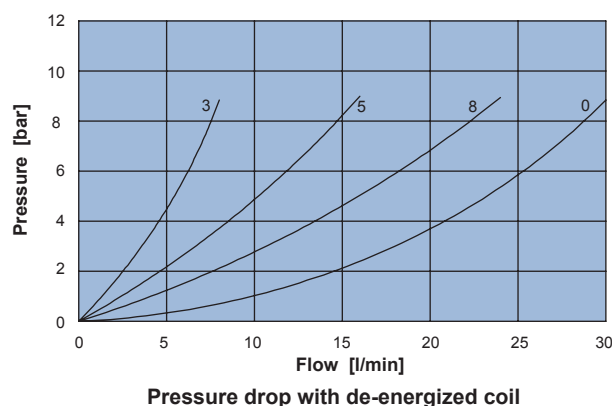

Ordering code

0 3 5 3 0 0 1

Hydraulic scheme

Flow range

0 3 5 8

100% Q.max 30% Q.max 50% Q.max 80% Q.max

