


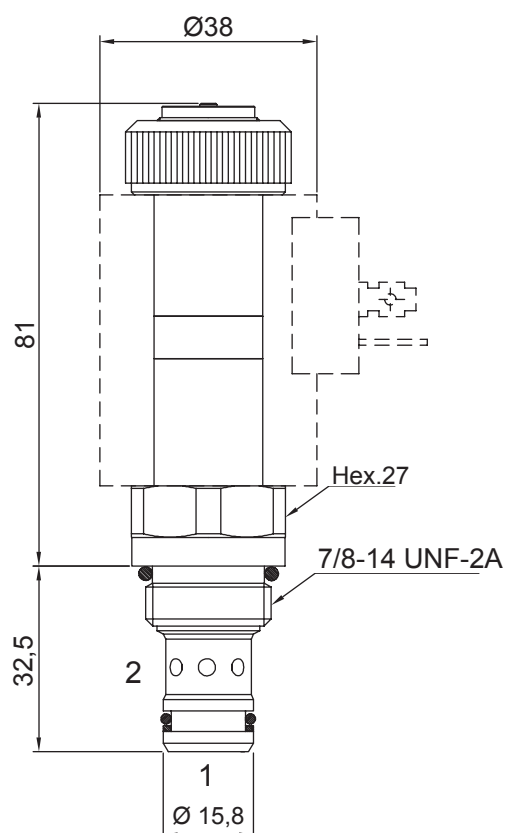


2 WAY NORMALLY CLOSED POPPET VALVE, ELECTRO-PROPORTIONAL FLOW CONTROL

- Flow **40 l/min**
- Max working pressure in 1:2 **250 bar**
- Leakage **0,25 cc/min**
- Seals **NBR and PTFE**
- Max current at 12 Vcc **1800mA**
- Max current at 24 Vcc **900mA**
- PWM **120 Hz**
- Hysteresis **5%**
- Cartridge tightening torque **40 Nm**
- Ring nut tightening torque **5 Nm**
- Weight (with coil) **0,53 Kg**
- Cavity **C230000** page 210
- Body **171302** page 191
- Coil (to be ordered separately) **09800** page 180

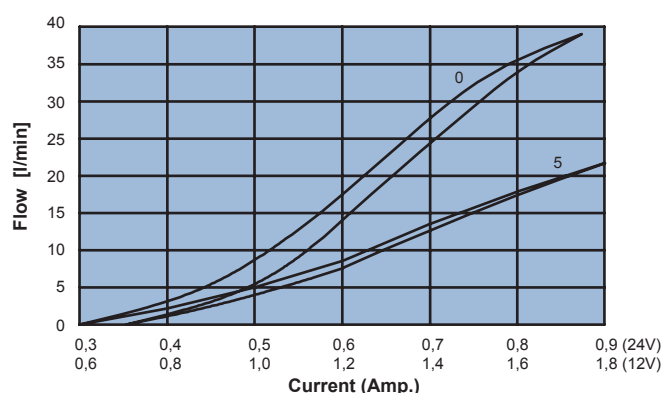

Graph flow/current with Δp from 2 to 1

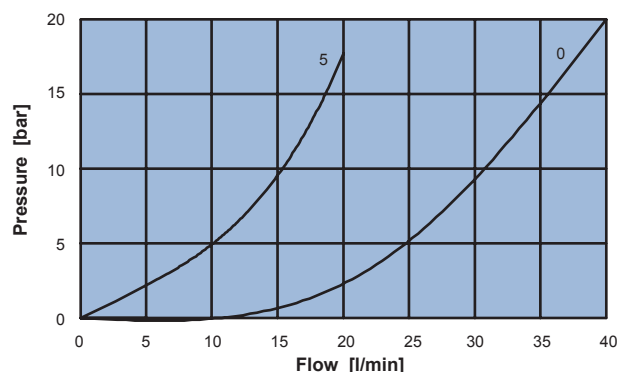

Pressure drop from 2 to 1

Ordering code

0 5 2 3 1 0 0 0

