BIDIRECTIONAL FLOW CONTROL VALVE

- Max Flow. . . . . .**30 l/min**
- Max working pressure . . . . . .**350 bar**
- Seals . . . . . .**NBR and PTFE**
- Cartridge tightening torque. . . . . .**40 Nm**
- Weight. . . . . **0,15 Kg**
- Tamper proof cap: **cod.4029250280**
- Adjustment range. . . . . **5 turns**
- Cavity . . . . . **C220000** page **208**
- Body. . . . . **171202** page **186**

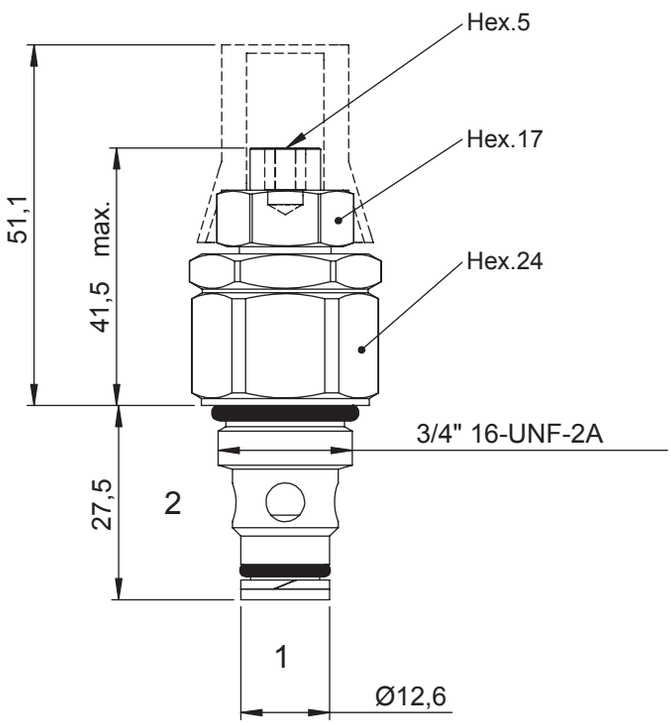

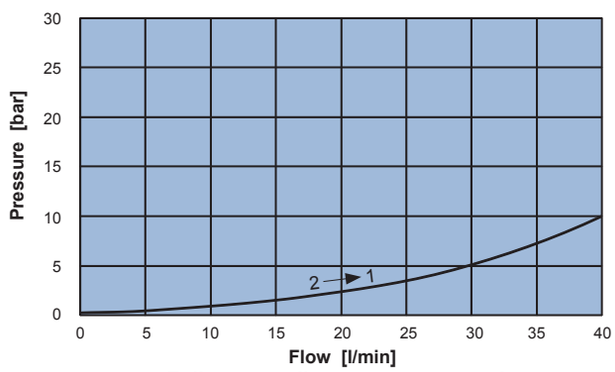

Fully open adjustment pressure drop

Ordering code

0 3 0 2 0 0 0 ☐ 0 1



Screw **Handknob**

Adjustments