



3 WAY FLOW CONTROL VALVE, MANUAL CONTROL & ELECTRO-PROPORTIONAL RELIEF VALVE

- Max regulated flow 50 l/min
- Maximum flow. 90 l/min
- Max pressure T. 10 bar
- Max pressure P:A. 350 bar
- Seals. NBR
- Max current at 12 Vcc. 1800mA
- Max current at 24 Vcc 900mA
- PWM 120 Hz
- Hysteresis. 5%
- Weight (with coil). 1,8 Kg
- Ring nut tightening torque for coil: 5 Nm
- Coil **09800** to be ordered separately (page 190)

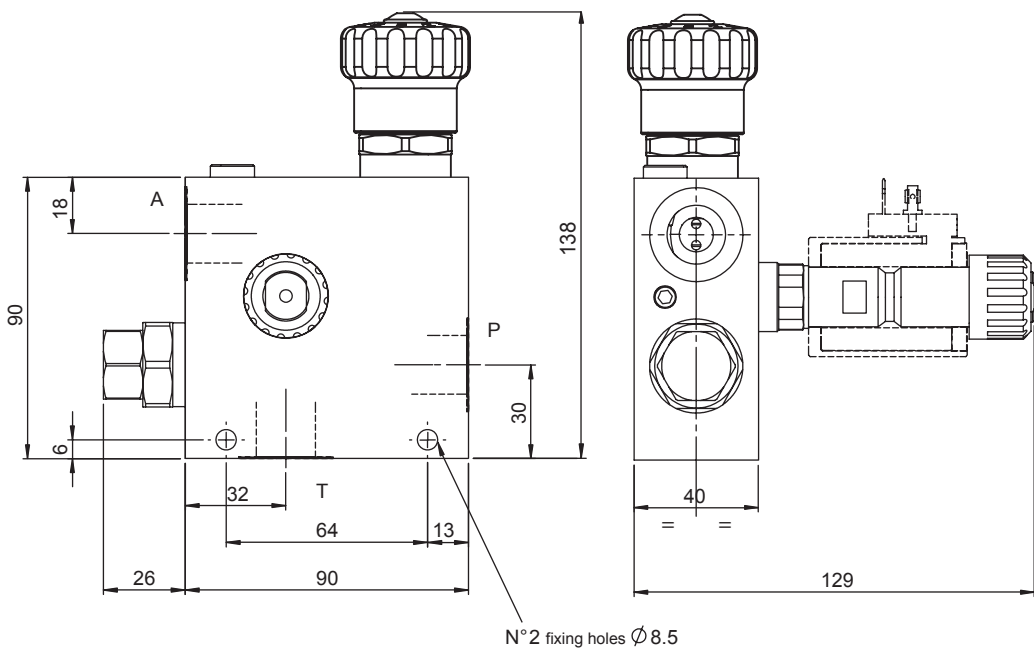

Ordering code

6 F 3 0 0 S 0 0 0

0

Screw

4

Handknob

5

Friction lock hand knob

RELIEF VALVE	P2
Setting range [bar]	8 - 250

PORTS	03	04
A,P,T	G 3/8"	G 1/2"