



3 WAY FLOW CONTROL VALVE, ELECTRO-PROPORTIONAL CONTROL & PRESSURE RELIEF VALVE

- Max regulated flow 75 l/min
- Maximum flow. 150 l/min
- Max pressure T. 10 bar
- Max pressure P:A. 350 bar
- Seals. NBR
- Max current at 12 Vcc. 1800mA
- Max current at 24 Vcc 900mA
- PWM 120 Hz
- Hysteresis. 5%
- Weight (with coil). 1,8 Kg
- Ring nut tightening torque for coil: 5 Nm
- Coil **09800** to be ordered separately (page 190)

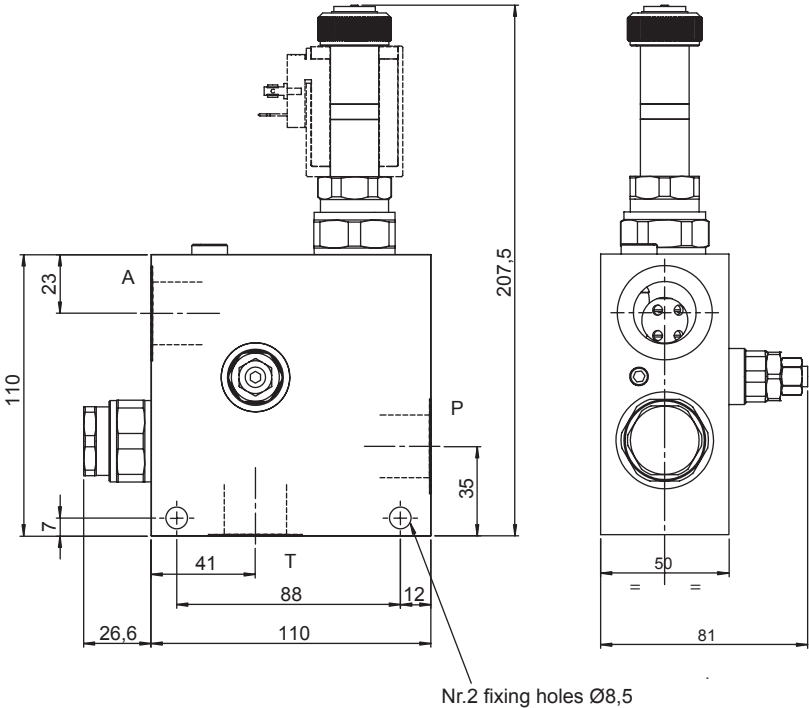

Ordering code

6 F 3 0 1 S 0 0 0

0

No emergency

1

Push pin

7

Handknob

RELIEF VALVE	M2	M3
Setting range [bar]	40 - 220	50 - 350
Pressure increase [bar/turn]	34	63
Standard Setting 4 l/min [bar]	100	200

PORTS	05
A,P,T	G 3/4"

