



3 WAY FLOW CONTROL VALVE, ELECTRO-PROPORTIONAL CONTROL & PRESSURE RELIEF VALVE

- Max regulated flow . . . . . 50 l/min
- Maximum flow . . . . . 90 l/min
- Max pressure T. . . . . 10 bar
- Max pressure P:A. . . . . 350 bar
- Seals. . . . . NBR
- Max current at 12 Vcc. . . . . 1800mA
- Max current at 24 Vcc . . . . . 900mA
- PWM . . . . . 120 Hz
- Hysteresis. . . . . 5%
- Weight (with coil). . . . . 1,8 Kg
- Ring nut tightening torque for coil: . . . . . 5 Nm
- Coil **09800** to be ordered separately (page190)

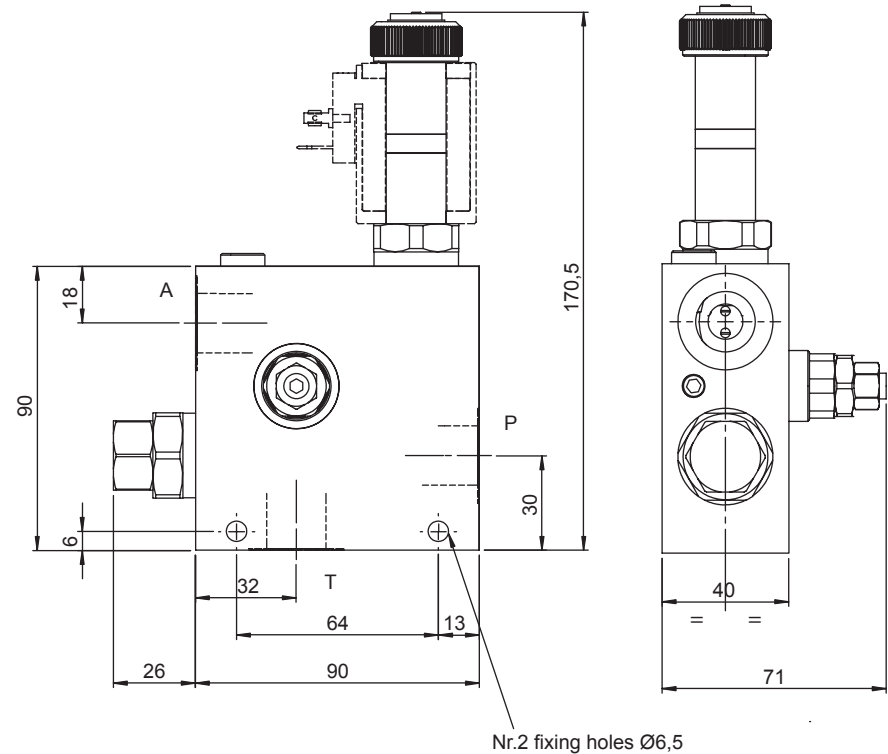

Ordering code

6 F 3 0 1        S   0 0 0

0

No emergency

1

Push pin

7

Handknob

| RELIEF VALVE                   | M2       | M3       |
|--------------------------------|----------|----------|
| Setting range [bar]            | 40 - 220 | 50 - 350 |
| Pressure increase [bar/turn]   | 34       | 63       |
| Standard Setting 4 l/min [bar] | 100      | 200      |

| PORTS | 03     | 04     |
|-------|--------|--------|
| A,P,T | G 3/8" | G 1/2" |

