ELECTRO-PROPORTIONAL 3 WAY FLOW CONTROL & RELIEF VALVE

- Max regulated flow . . . . . **50 l/min**
- Maximum flow. . . . . **90 l/min**
- Max pressure T. . . . . **10 bar**
- Max pressure P:A. . . . . **350 bar**
- Seals. . . . . **NBR**
- Max current at 12 Vcc. **1800mA**
- Max current at 24 Vcc **900mA**
- PWM . . . . . **120 Hz**
- Hysteresis. **5%**
- Weight (with coil). . . . . **1,8 Kg**
- Ring nut tightening torque for coil: . . . . . **5 Nm**
- Coil **09800** to be ordered separately (page **190**)

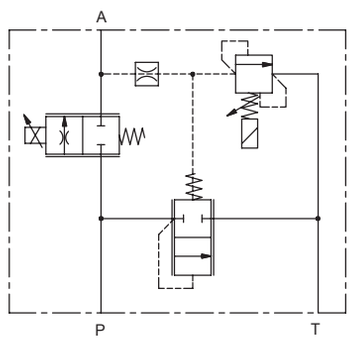

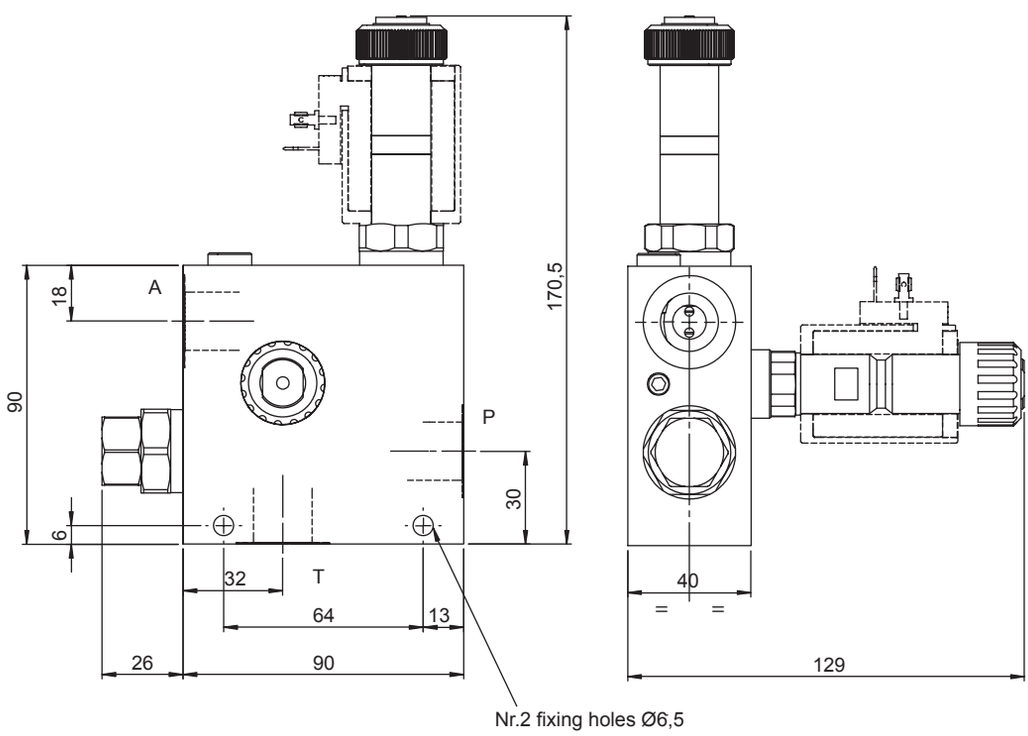

Ordering code

6 F 3 0 1 ☐ ☐ S ☐ 0 0 0

0	1	7
		
No emergency	Push pin	Handknob

RELIEF VALVE	P2
Setting range [bar]	8 - 250

PORTS	03	04
A,P,T	G 3/8”	G 1/2”