

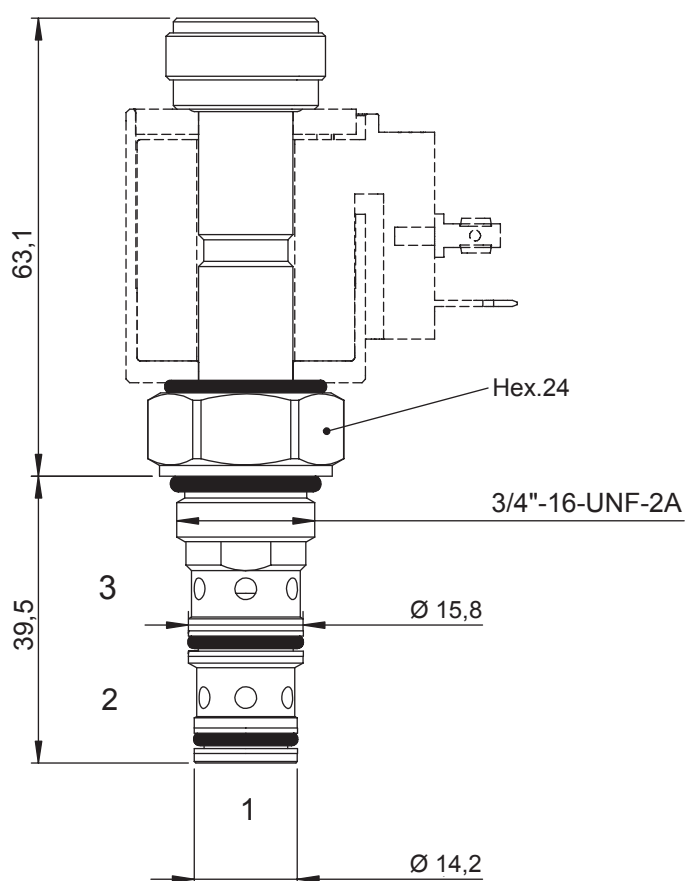


3 WAY 2 POSITION ELECTRIC SPOOL VALVE, DIRECT ACTING - LOW PRESSURE

- Flow **5 l/min**
- Max working pressure **50 bar**
- Leakage **20 cc/min**
- Seals **NBR**
- Cartridge tightening torque **30 Nm**
- Ring nut tightening torque **5 Nm**
- Weight (with coil) **0,35 Kg**
- Cavity **C320000** page 218
- Body **171212** page 187
- Coil (to be ordered separately) **09400** page 179

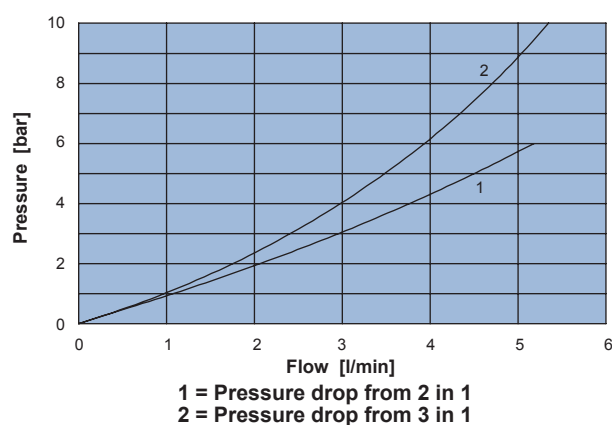

Ordering code

0 4 0 2 3 1 0 0 0 1