


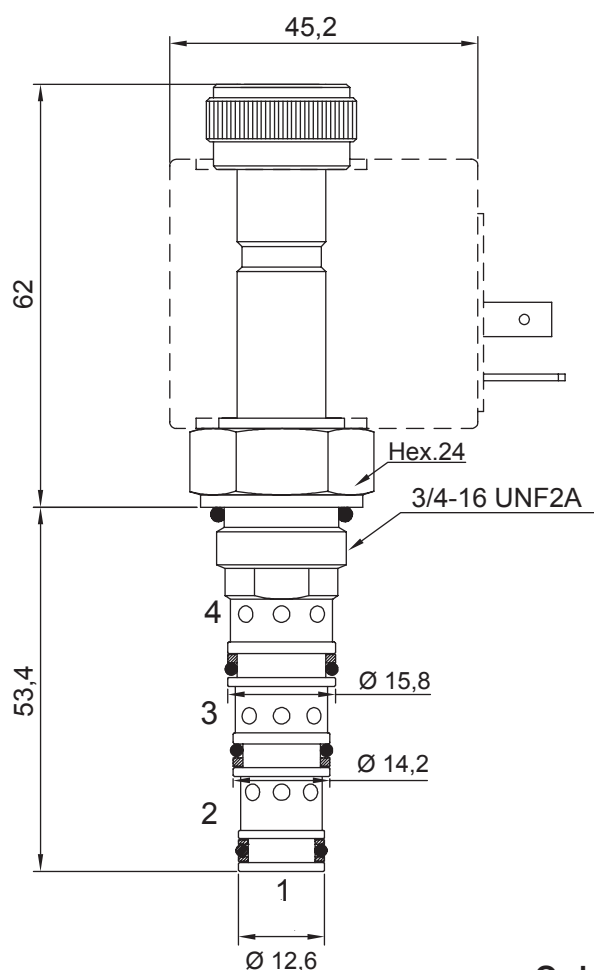


4 WAY 2 POSITION ELECTRIC SPOOL VALVE, DIRECT ACTING

- Flow 10 l/min
- Max working pressure 210 bar
- Leakage 60 cc/min
- Seals NBR and PTFE
- Cartridge tightening torque 30 Nm
- Ring nut tightening torque 5 Nm
- Weight (with coil) 0,35 Kg
- Cavity C420000 page 225
- Body 171222 page 190
- Coil (to be ordered separately) 09400 page 179

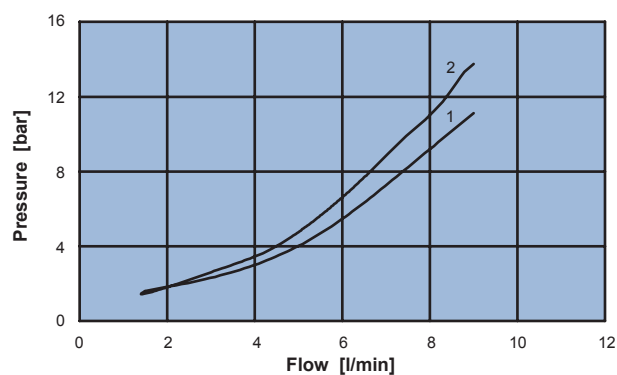

1 = Pressure drop from 2/4 to 3
2 = Pressure drop from 3 to 2/4

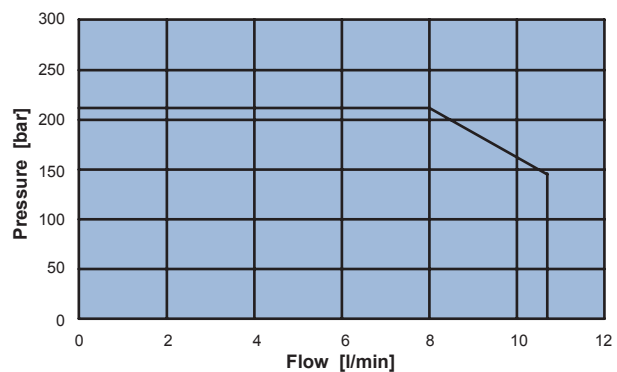

Application limits from 3 in 2/4

Ordering code

0 4 1 2 2 0 0 0 0

