

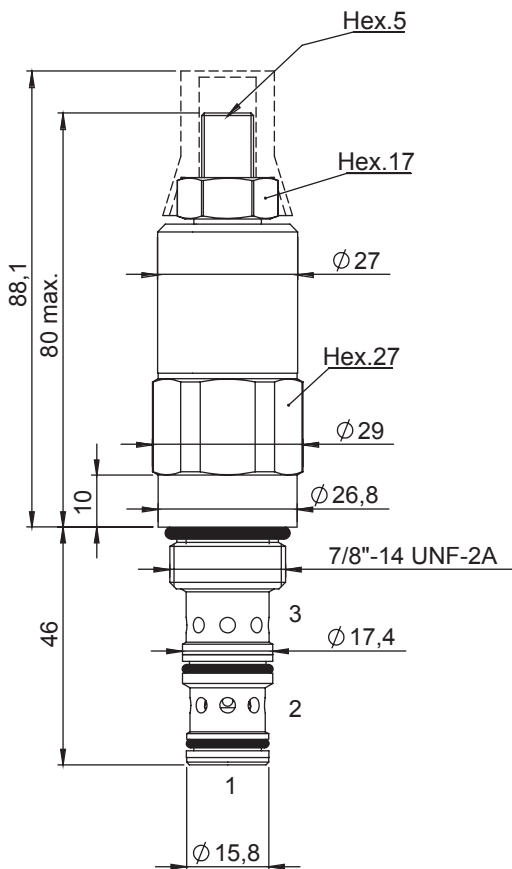


DIRECT ACTING PRESSURE REDUCING VALVE


- Flow 30 l/min
- Max working pressure in 2 350 bar
- Max working pressure in 1 150 bar
- Max working pressure in 3 1 bar
- Seals NBR and PTFE
- Cartridge tightening torque 50 Nm
- Weight 0,31 Kg
- Leakage with 350 bar in 2: 70 cc/min
- Tamper proof cap. cod. 4029250280
- Cavity C330000 page 220
- Body 171312 page 192

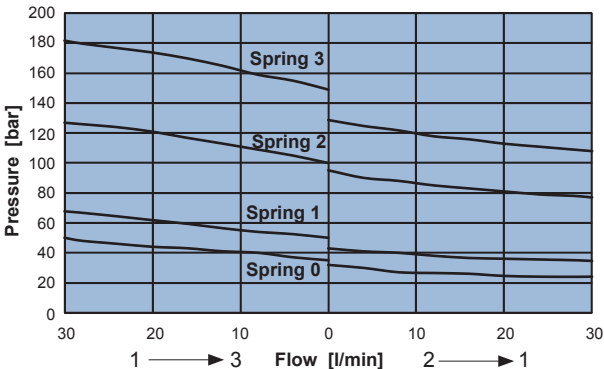

Ordering code

0 1 2 3 2 0 0 0

SPRINGS	0	1	2	3
Setting range [bar]	5 - 30	15 - 55	20 - 103	30 - 150
Pressure Increase [bar/turn]	5	8	20	30
Standard setting [bar]	25	50	100	140

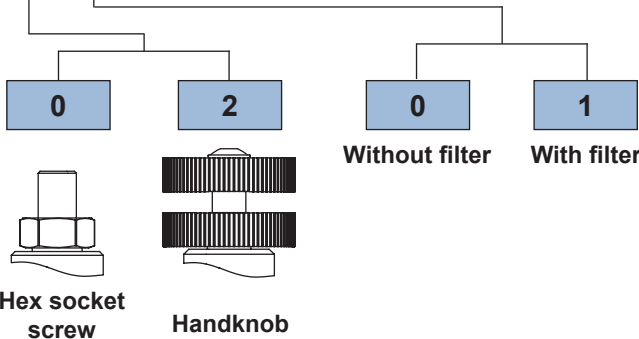

Adjustments

