

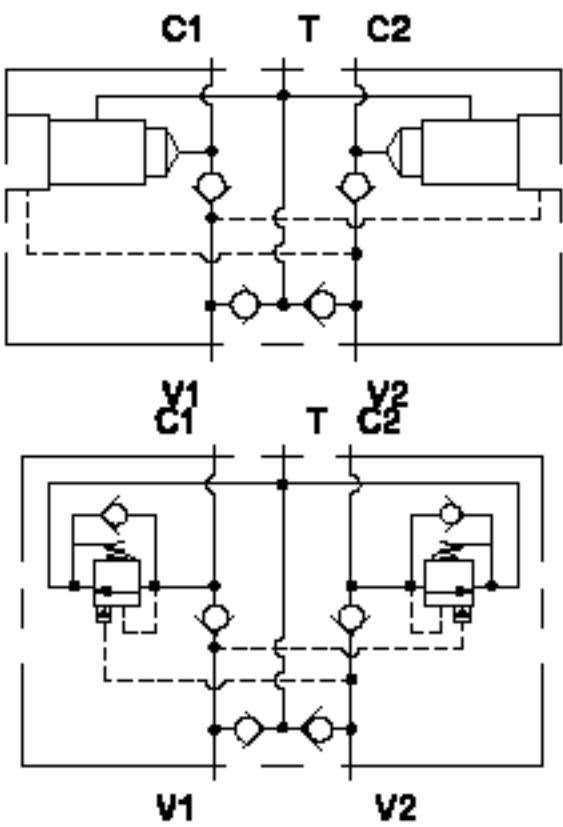
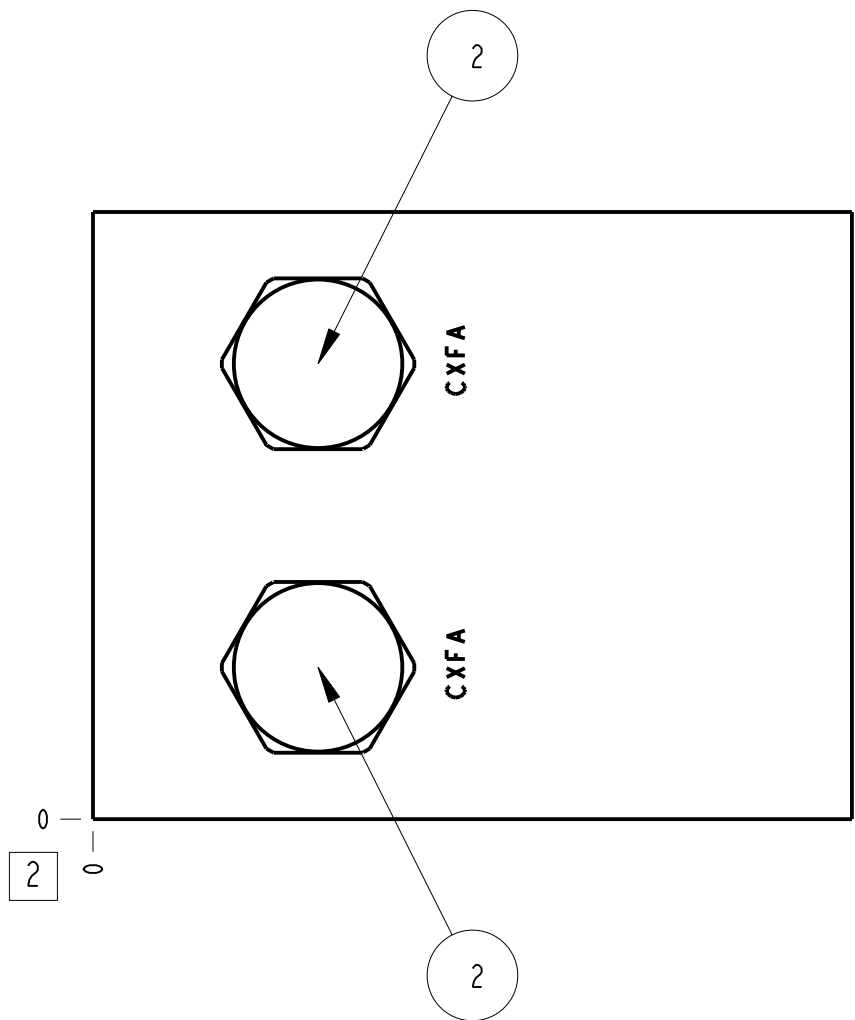
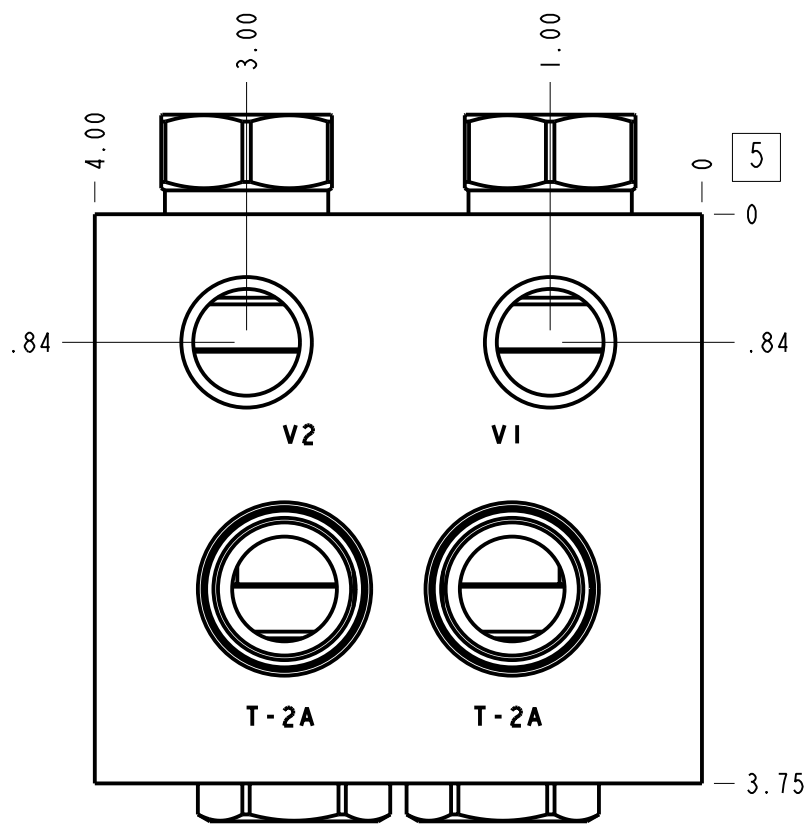
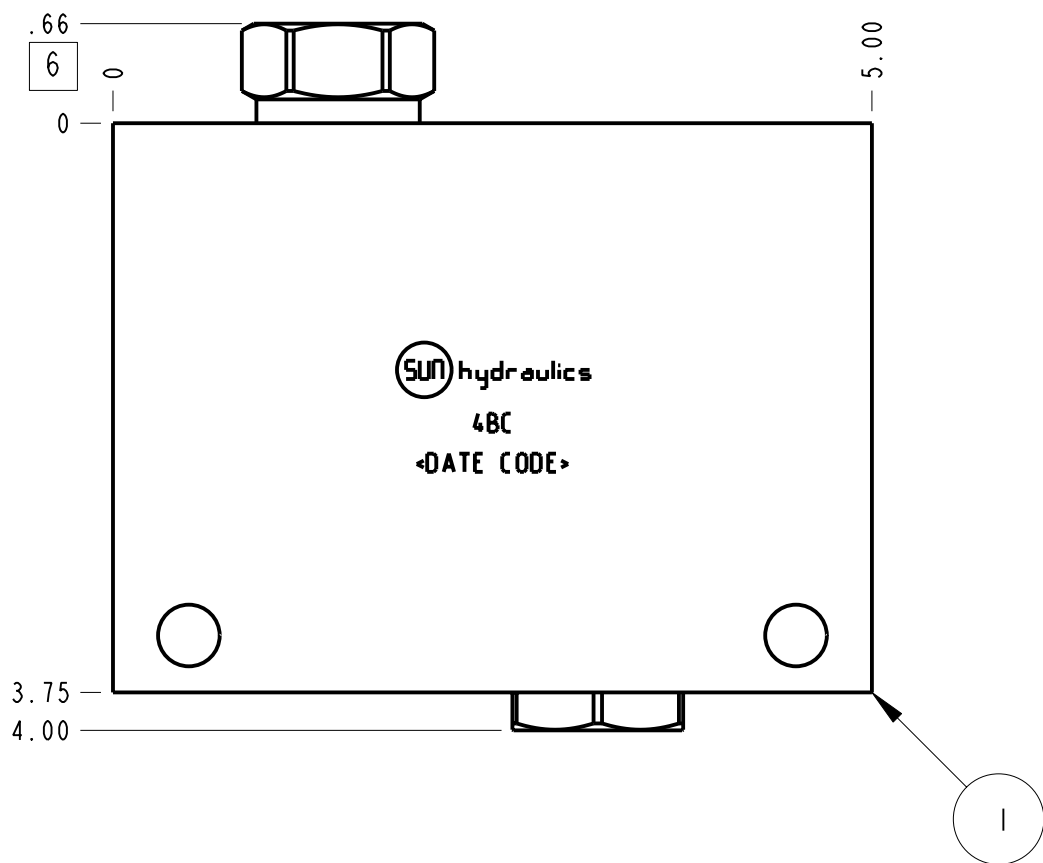
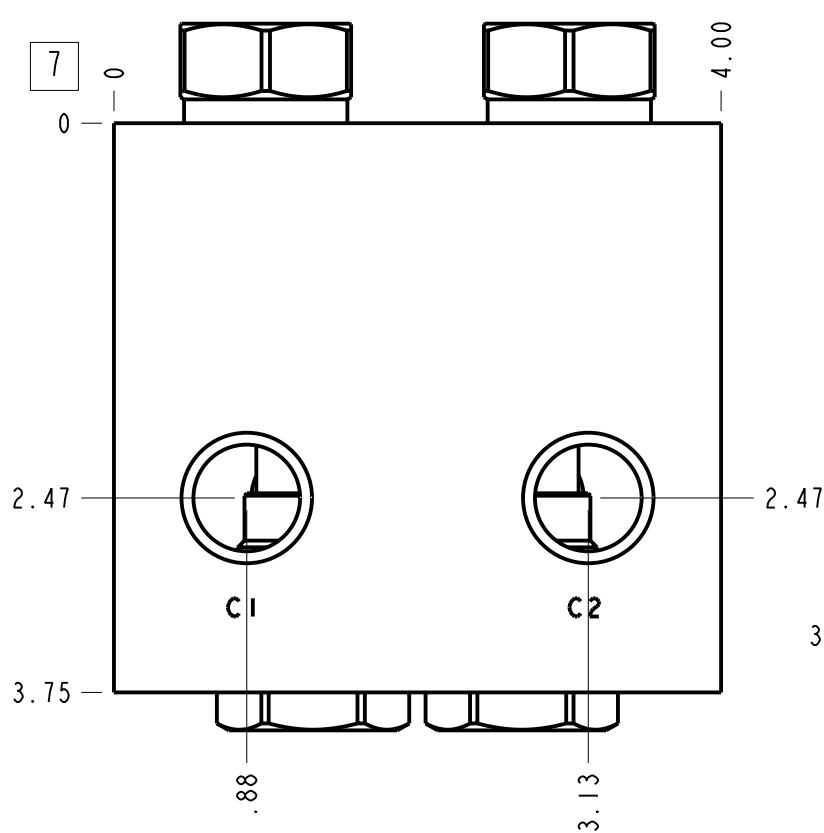


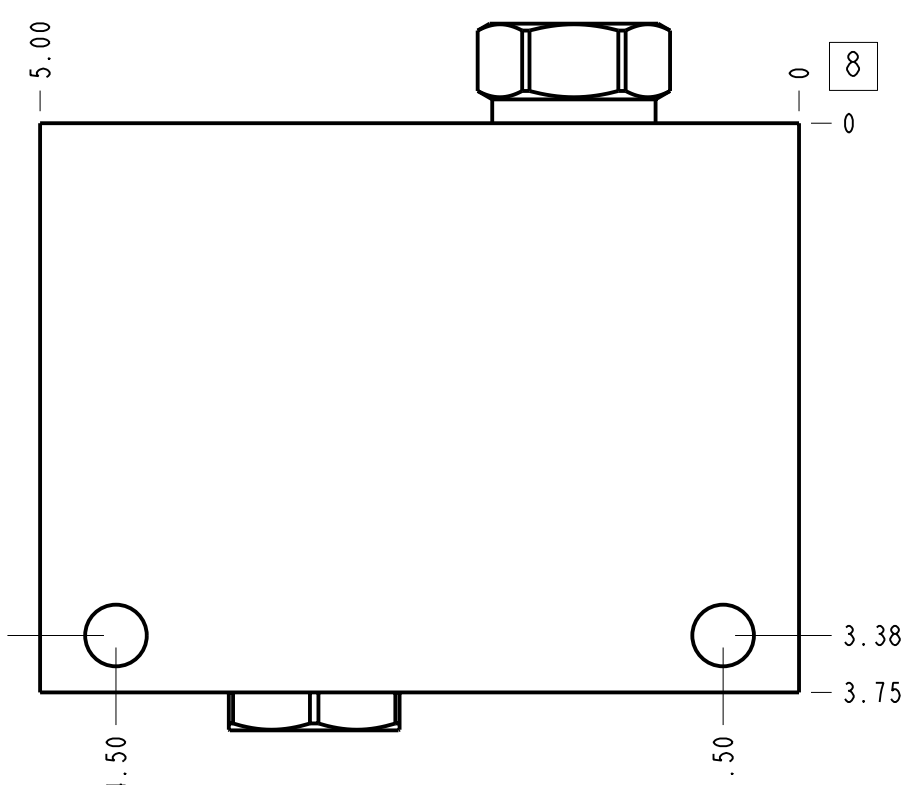

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

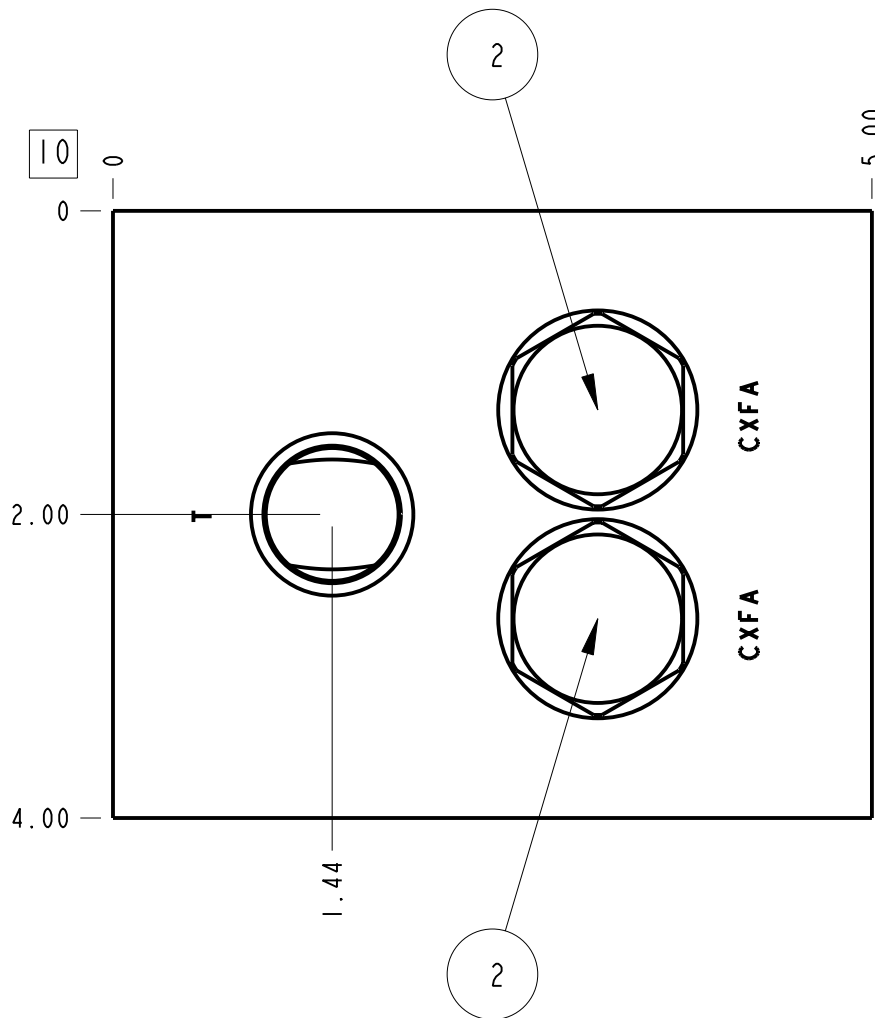

Port Headings		
Product	Port	Size
4BC	Ports C1,C2,V1,V2	1/2" NPTF
4BC	Port T	3/4" NPTF

Technical Data	U.S. Units	Metric Units
Cavity	T-2A	
Body Features	Cushion lock with make up checks	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	2	
Weight	7.376 lb.	3,345 kg.
Mounting Hole Diameter	.41 in.	10,4 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

2	CXFA-XAN			CHECK VALVE	
1	153-443-001		6061-T6 ALUMINUM	BODY	
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	
MODEL			4BC		
DESCRIPTION			T-2A Line mount Cushion lock with make up checks		
			DATE	SCALE	DWG SIZE
			May-08-25	0.791	C
			SHEET	1	
			FIRST ANGLE		
			THIRD ANGLE		
					