
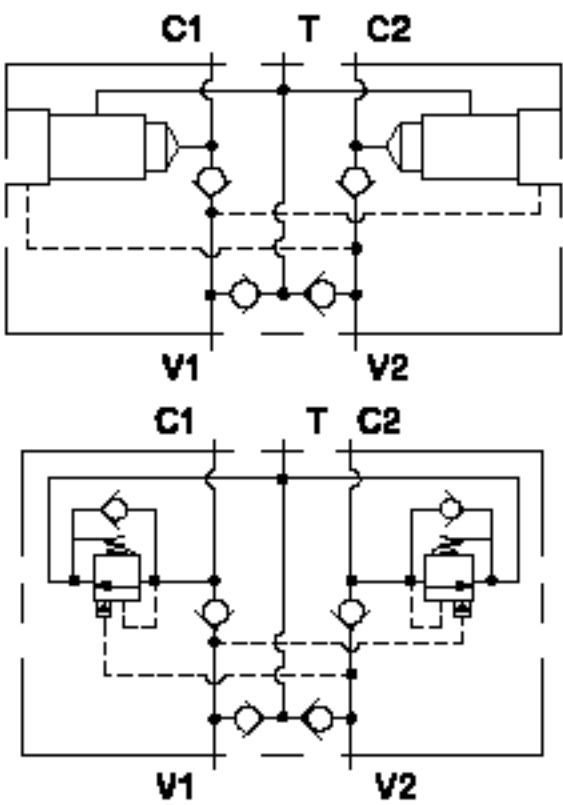
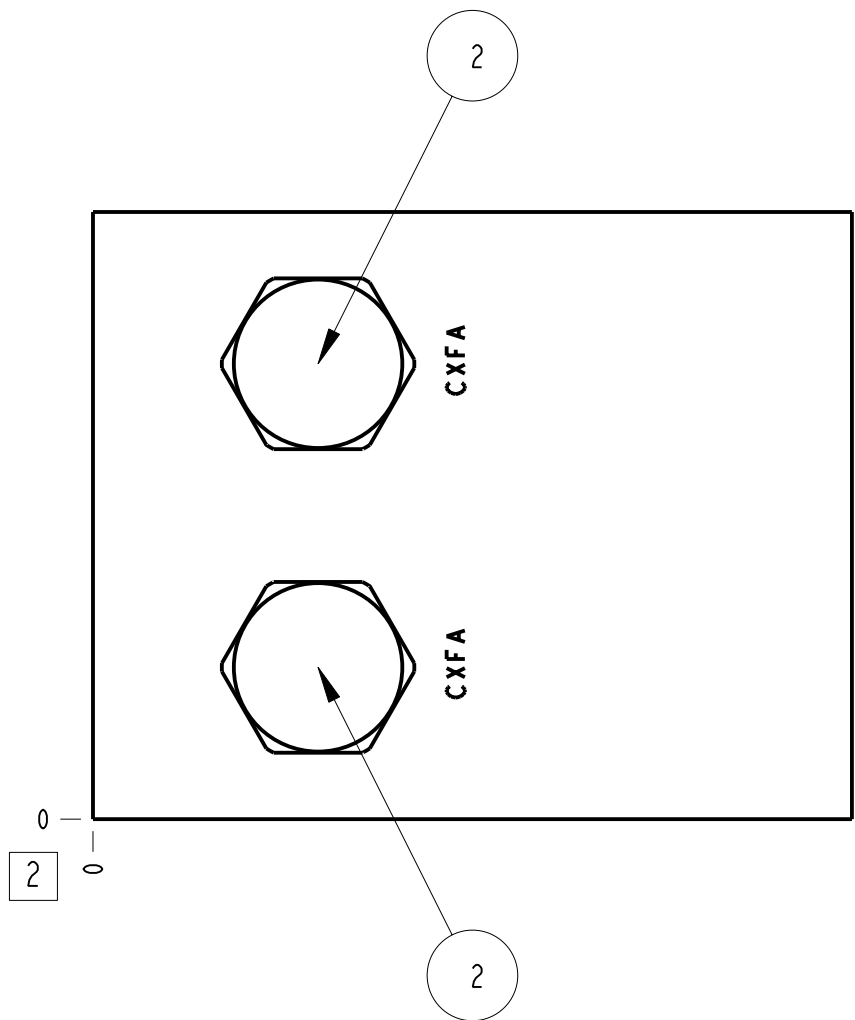
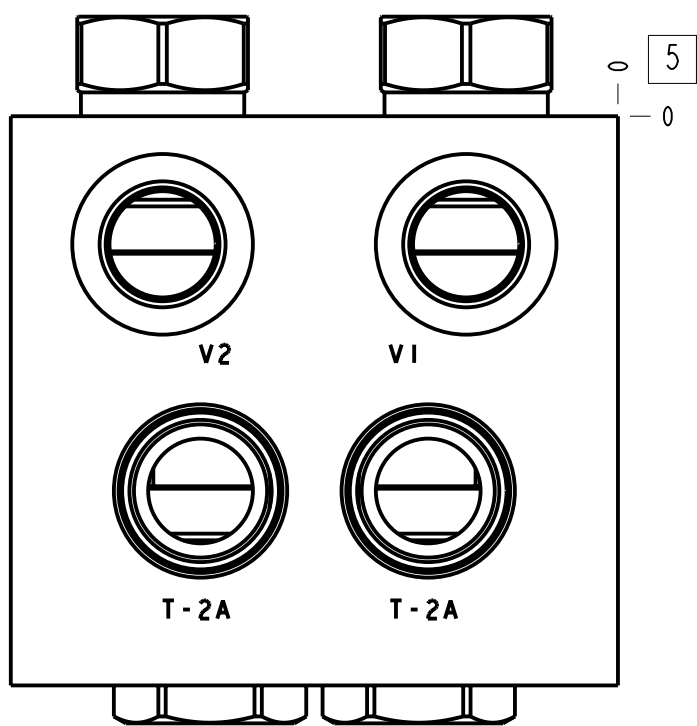
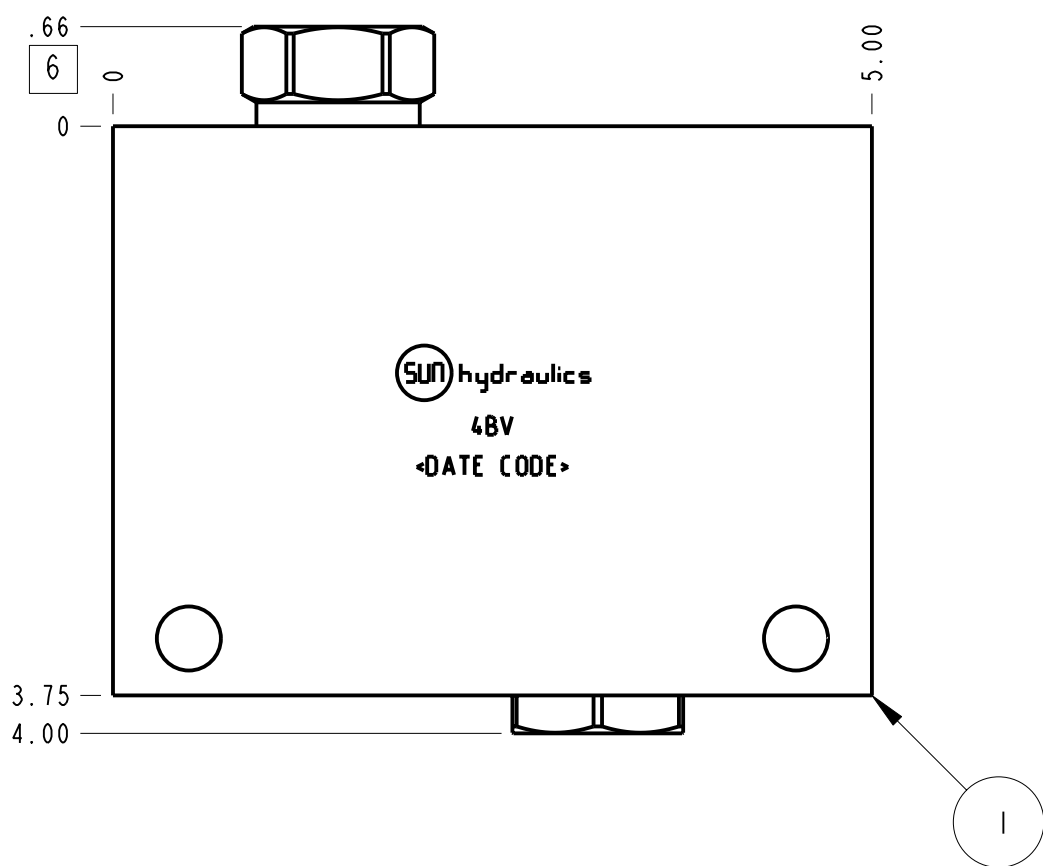
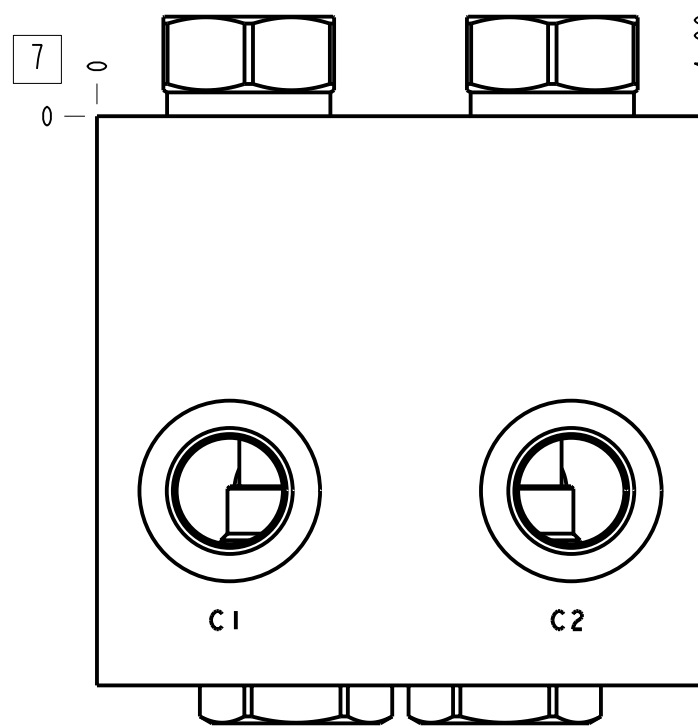
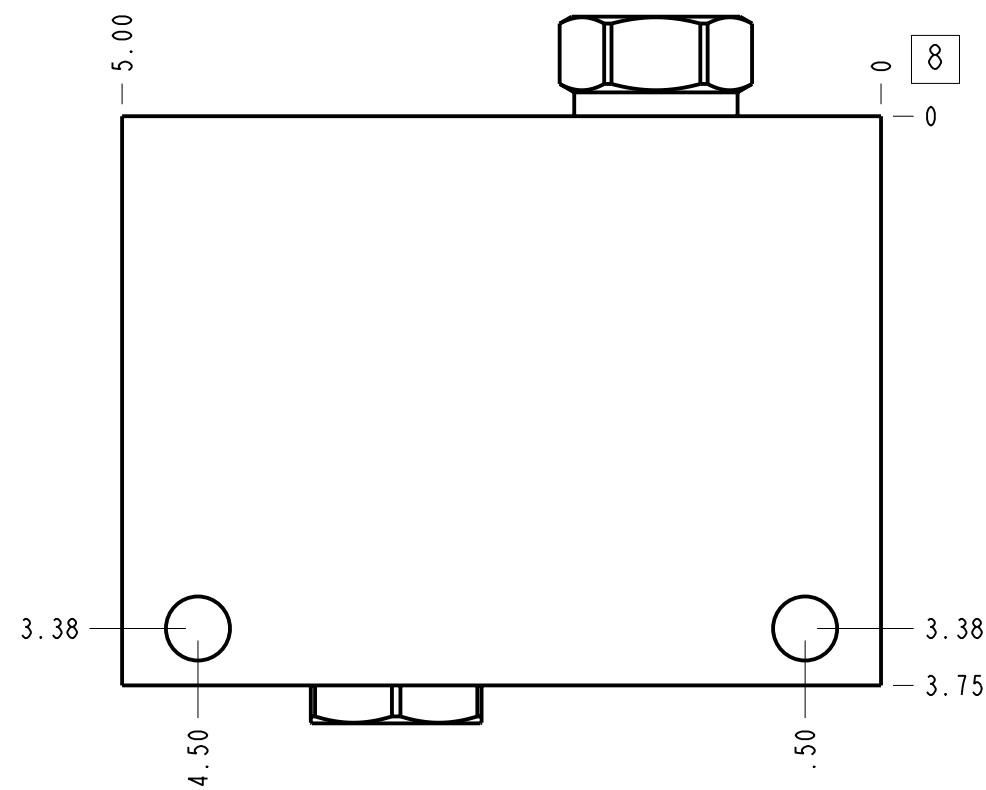


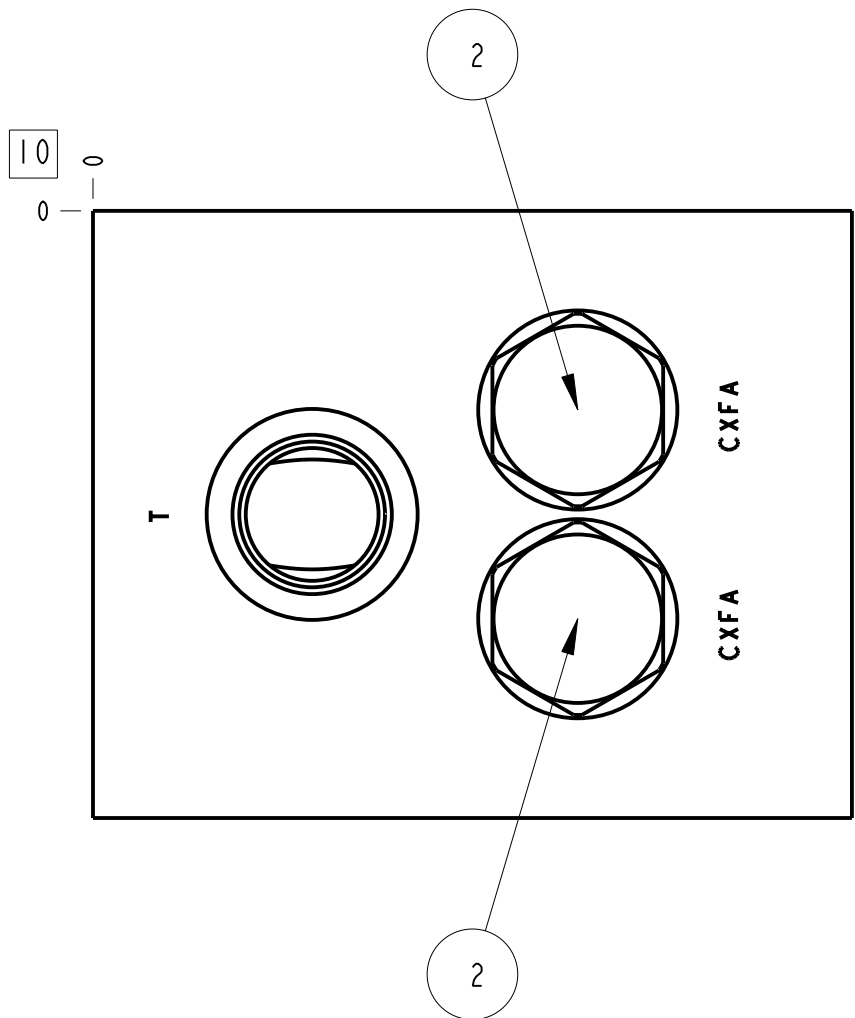

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
4BV	Ports C1,C2,V1,V2	1/2" BSPP
4BV	Port SYS 2	3/4" BSPP

Technical Data	U.S. Units	Metric Units
Cavity	T-2A	
Body Features	Cushion lock with make up checks	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	2	
Weight	7.341 lb.	3,330 kg.
Mounting Hole Diameter	.42 in.	10,7 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

2	CXFA-XAN			CHECK VALVE	4
1	153-443-007		6061-T6 ALUMINUM	BODY	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
	4BV		ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		
	DESCRIPTION		DATE	SCALE	DWG SIZE
T-2A Line mount Cushion lock with make up checks		Sep-09-26	0.791	C	1
				FIRST ANGLE THIRD ANGLE	
				SUN hydraulics®	