
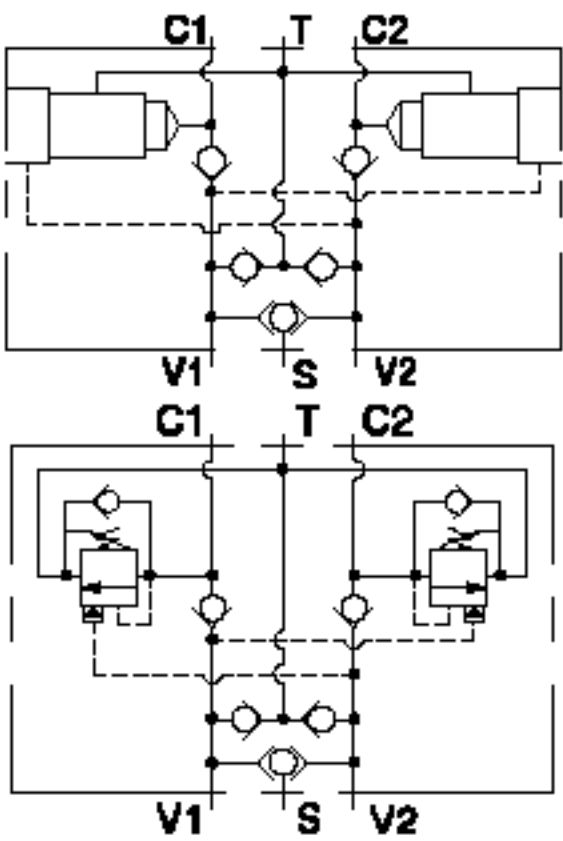
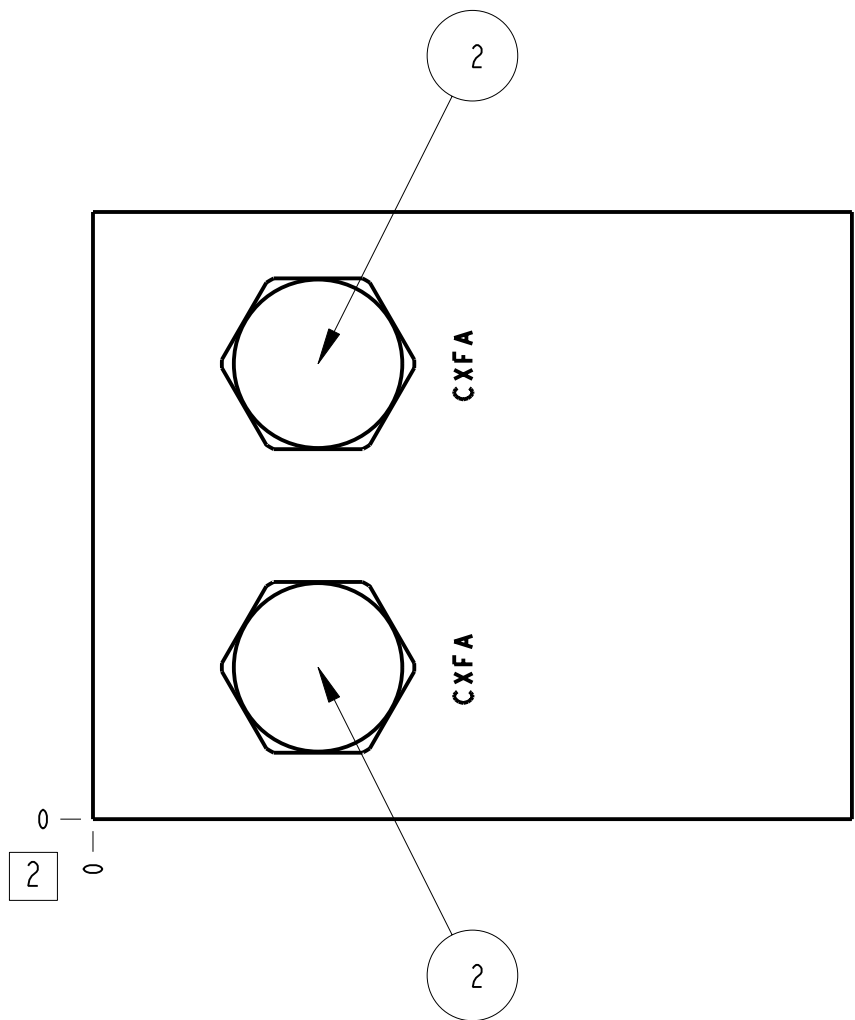
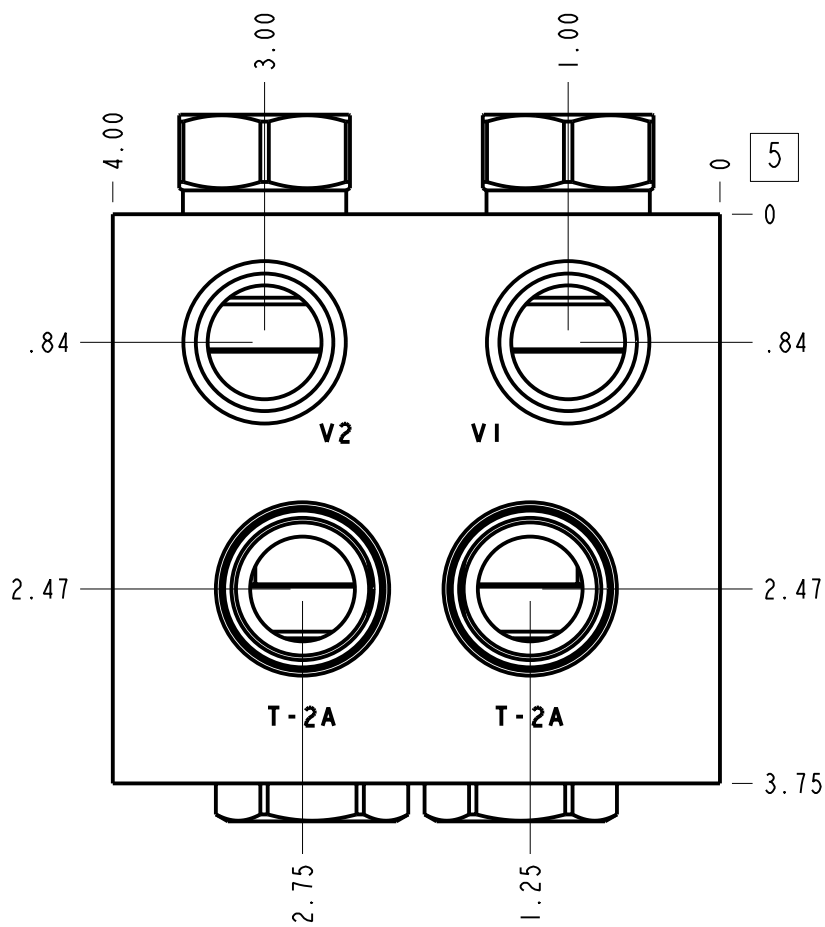
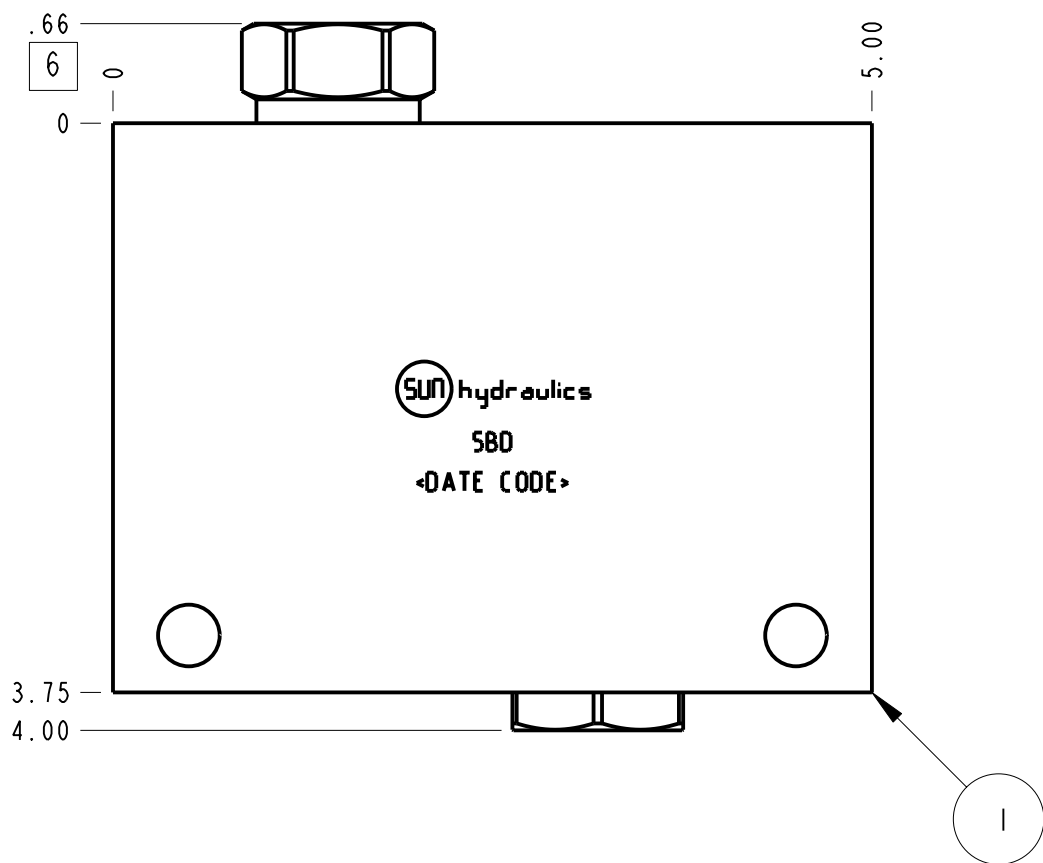
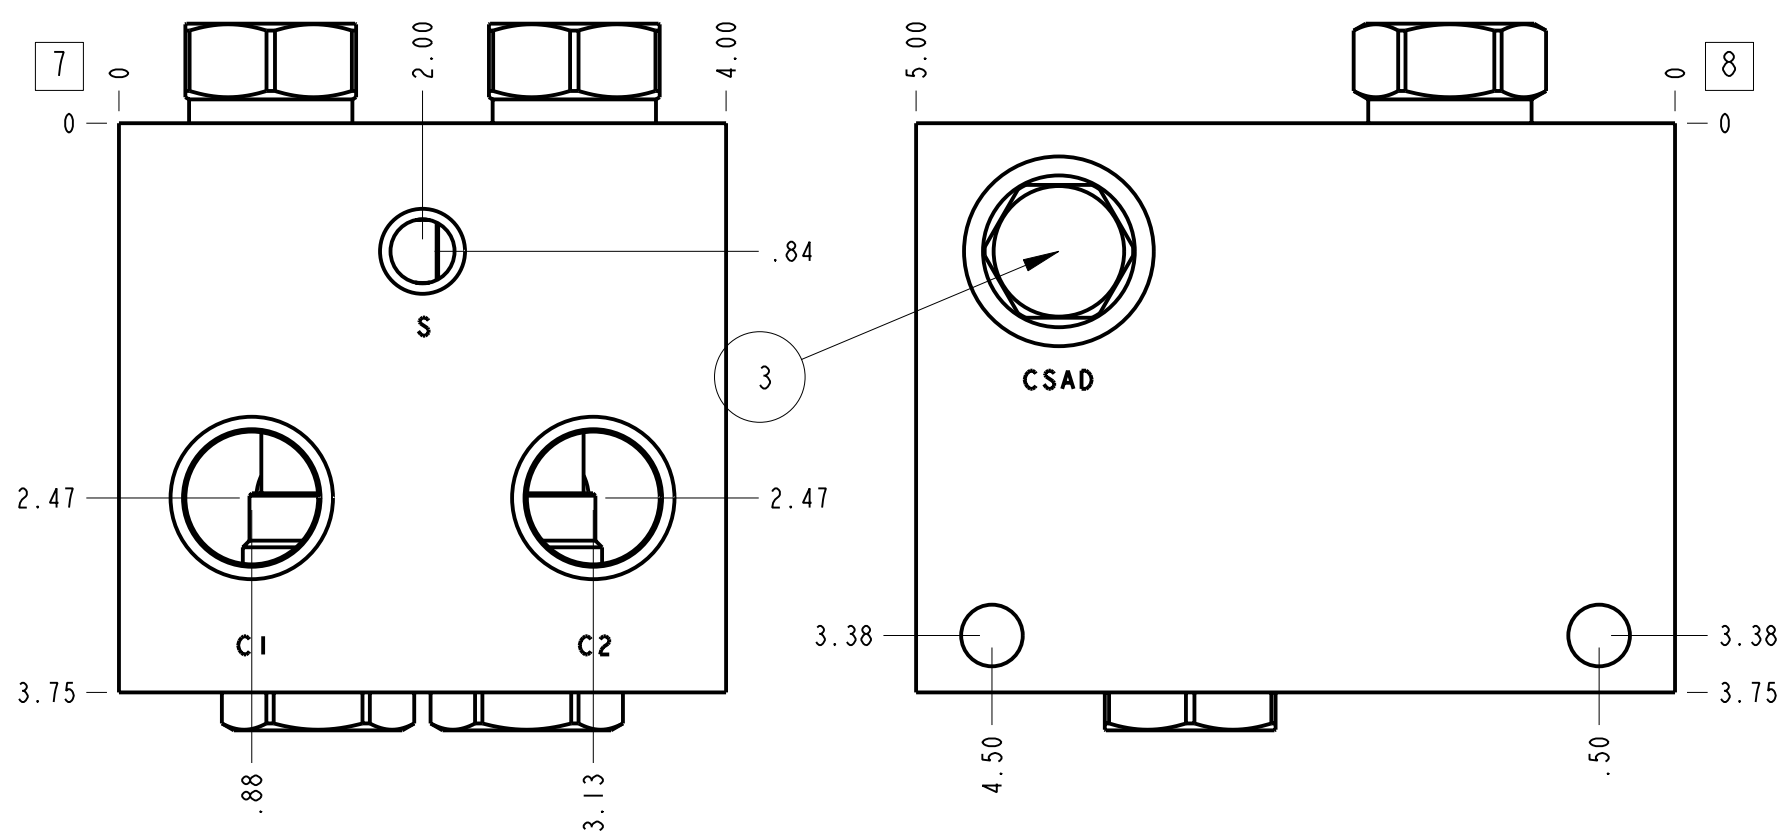


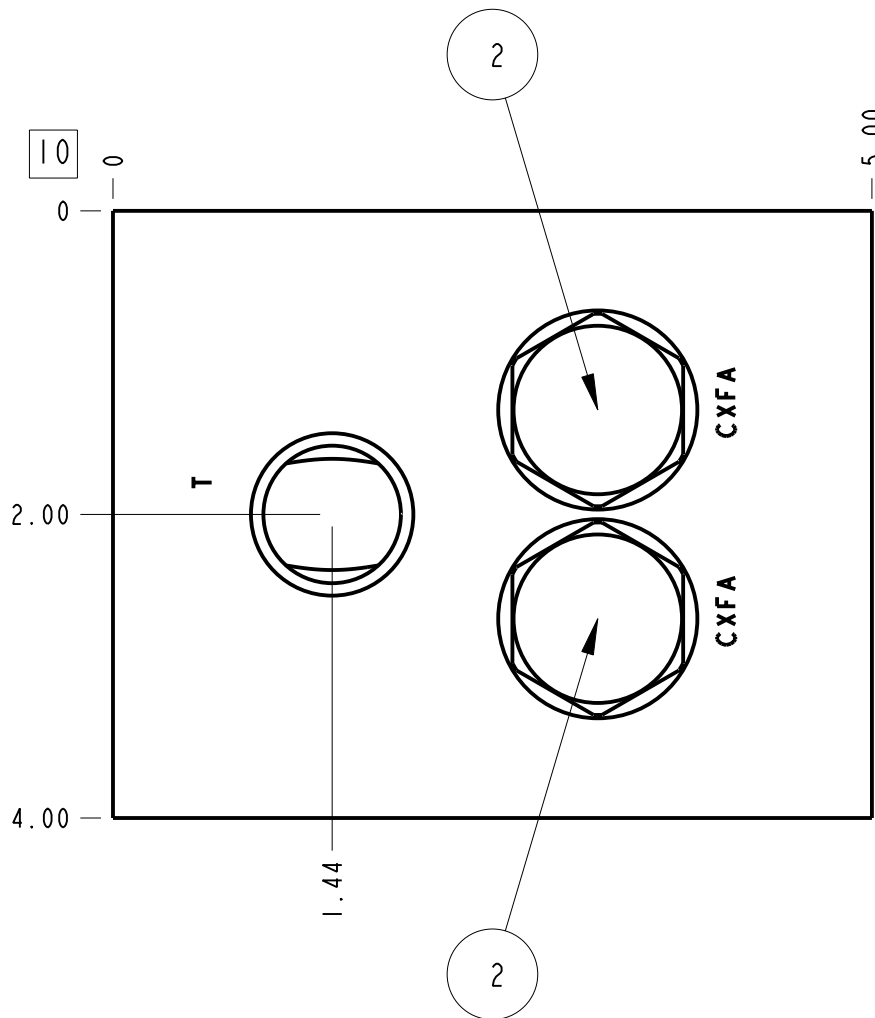

Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
5BD	Ports C1,C2,V1,V2	3/4" NPTF
5BD	Port S	1/4" NPTF
5BD	Port T	3/4" NPTF

Technical Data	U.S. Units	Metric Units
Cavity	T-2A	
Body Features	Cushion lock with make up checks and shuttle	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	2	
Weight	7.296 lb.	3,309 kg.
Mounting Hole Diameter	.41 in.	10,4 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

3	CSAD-XXN			SHUTTLE VALVE	1			
2	CXFA-XAN			CHECK VALVE	4			
1	153-442-002		6061-T6 ALUMINUM	BODY	1			
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY			
MODEL			5BD		ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE			
DESCRIPTION			DATE	SCALE	DWG SIZE	SHEET	FIRST ANGLE	THIRD ANGLE
T-2A Line mount (See Technical Data for Body Features)			Feb-10-26	0.791	C	1		
								