






Technical Data	U.S. Units	Metric Units
Cavity	T-2A	
Body Features	Through port 2 with reverse flow check	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	3.353 lb.	1,521 kg.
Mounting Hole Thread	M10x1.5 - 6H	
Mounting Hole Depth	.62 in.	15,7 mm
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

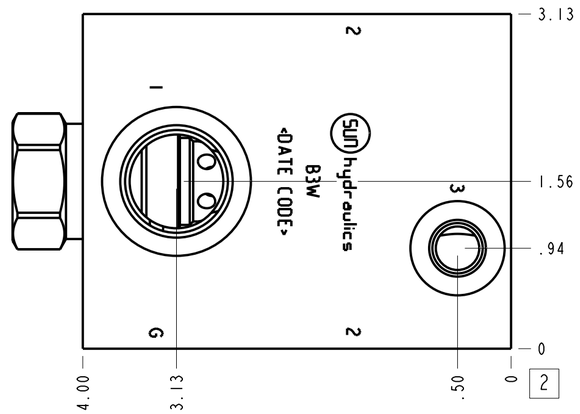

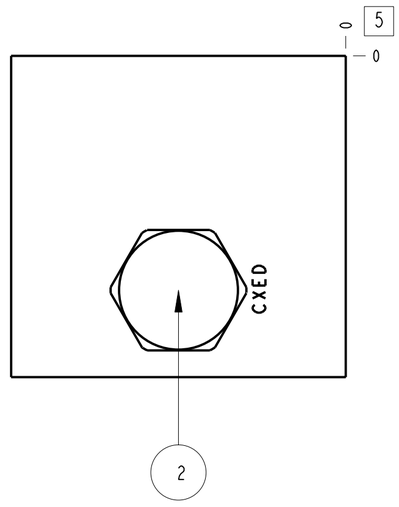

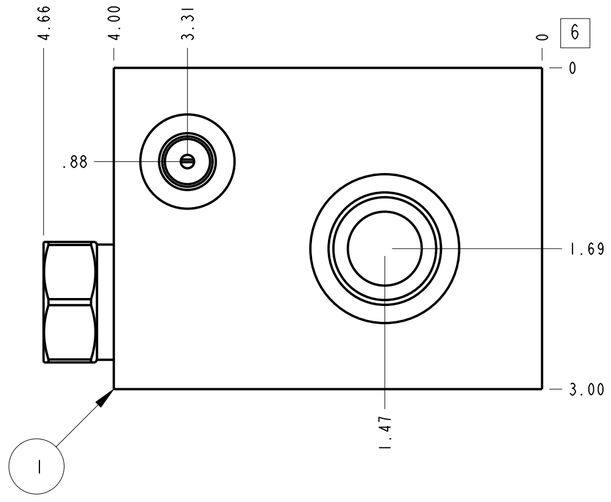


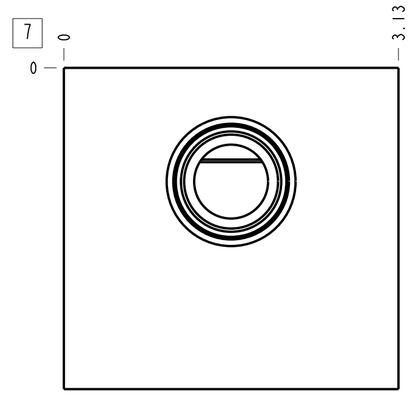

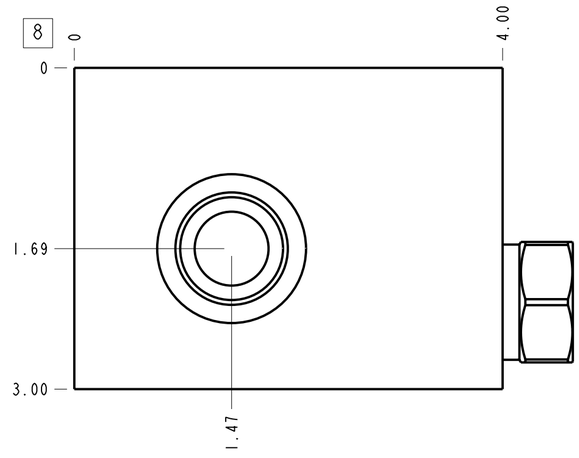

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

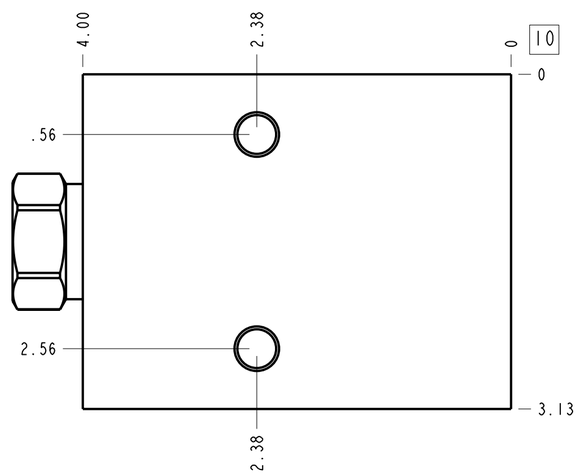

Port Headings		
Product	Port	Size
B3W	Ports 1 & 2	3/4" BSPP
B3W	Port 3	1/4" BSPP
B3W	Gage Port	1/4" BSPP

ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
2	CXED-XCN			CHECK VALVE	1
1	151-158-009		6061-T6 ALUMINUM	BODY	1

MODEL: B3W	ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE	FIRST ANGLE / THIRD ANGLE		
DESCRIPTION: T-2A Line mount Through port 2 with reverse flow check	DATE: Dec-01-25	SCALE: 0.914	DWG SIZE: C	SHEET: 1

sun hydraulics®