






Technical Data	U.S. Units	Metric Units
Cavity	T-2A	
Body Features	2 cylinder sequence, with reverse checks	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	2	
Weight	3.504 lb.	1,589 kg.
Mounting Hole Diameter	.34 in.	8.6 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

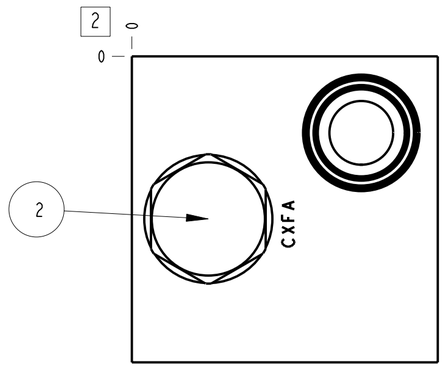

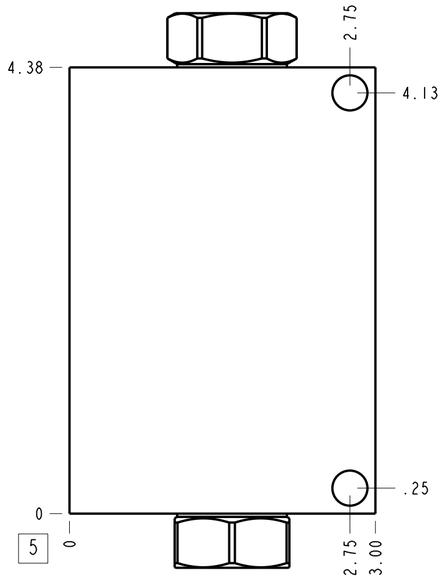

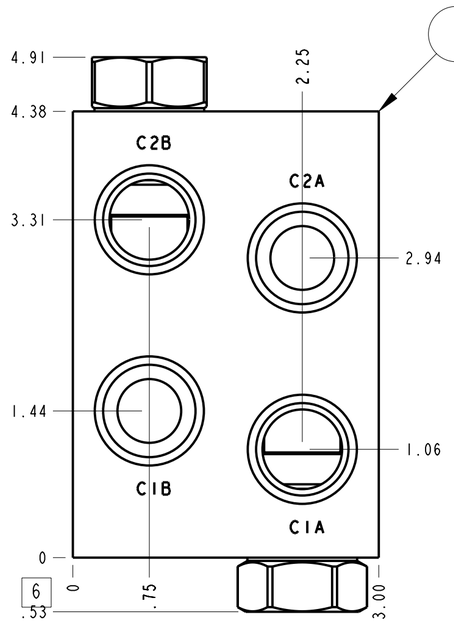


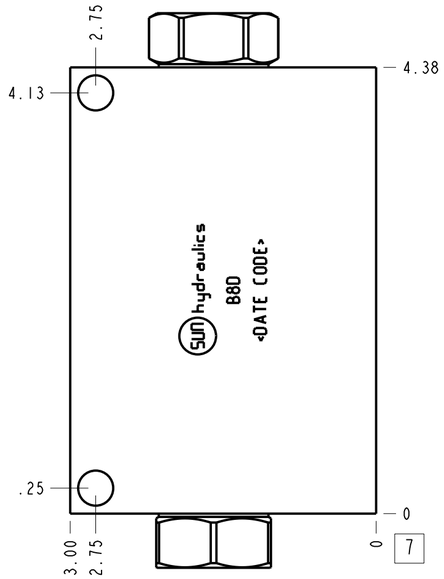

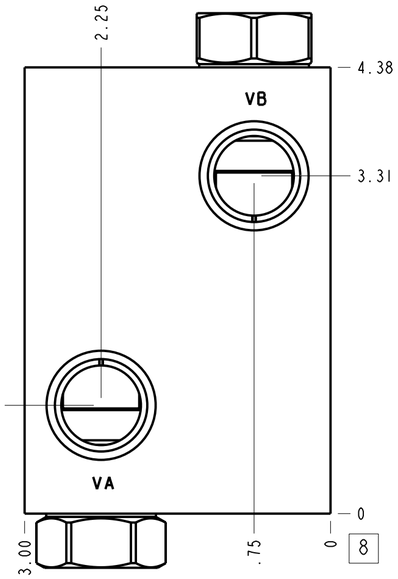

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

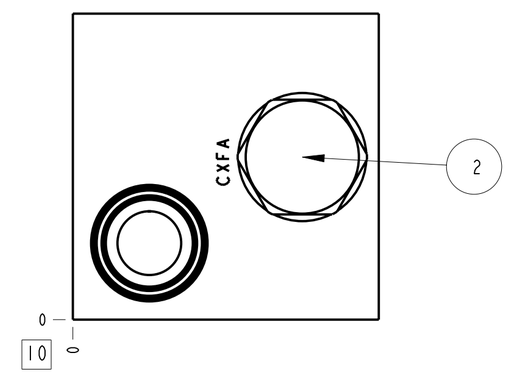

Port Headings		
Product	Port	Size
B8D	All Ports	3/4" NPTF

ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
2	CXFA-XCN			CHECK VALVE	2
1	150-054-003		6061-T6 ALUMINUM	BODY	1

MODEL: B8D			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE	FIRST ANGLE / THIRD ANGLE	
DESCRIPTION: T-2A Line mount 2 cylinder sequence, with reverse checks	DATE: Nov-25-24	SCALE: 0.871	DWG SIZE: C	SHEET: 1	sun hydraulics