
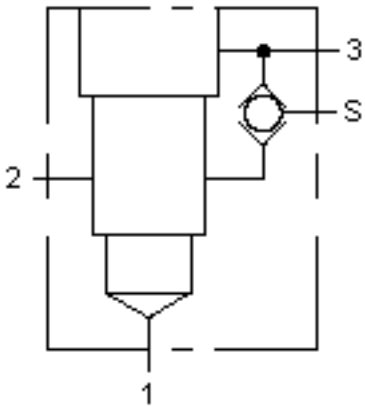
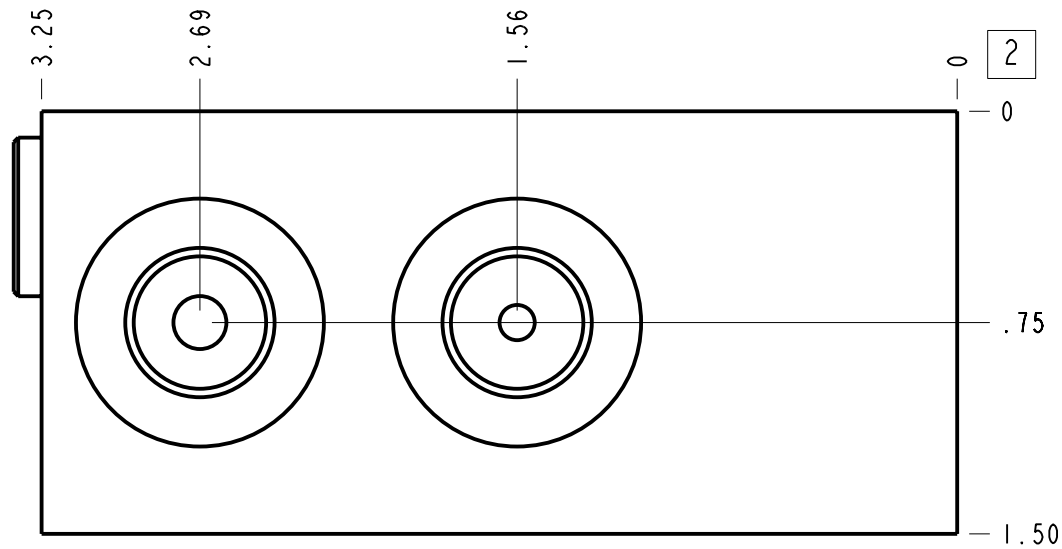
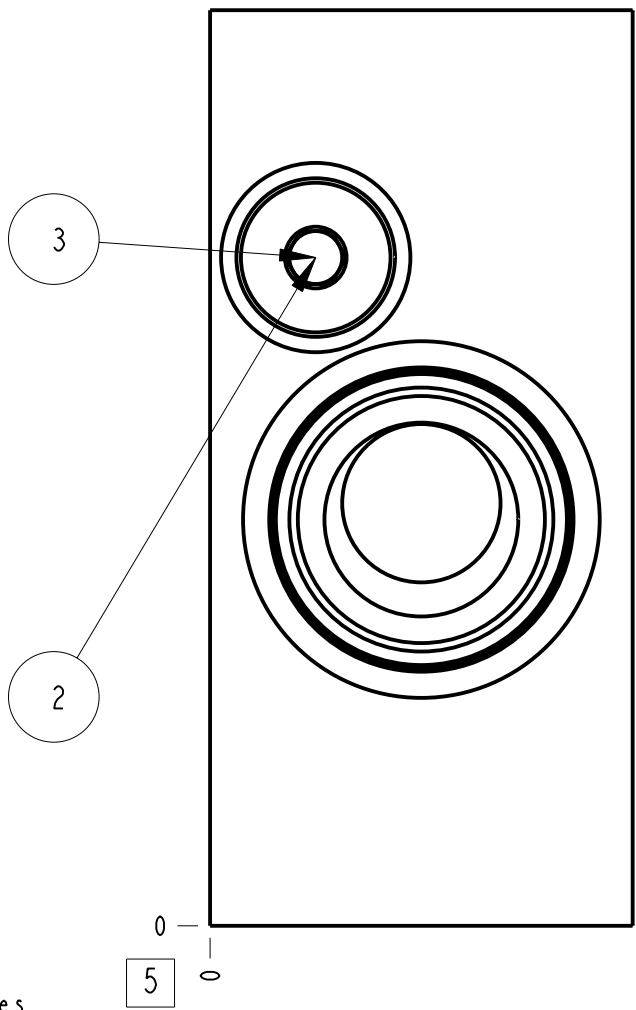
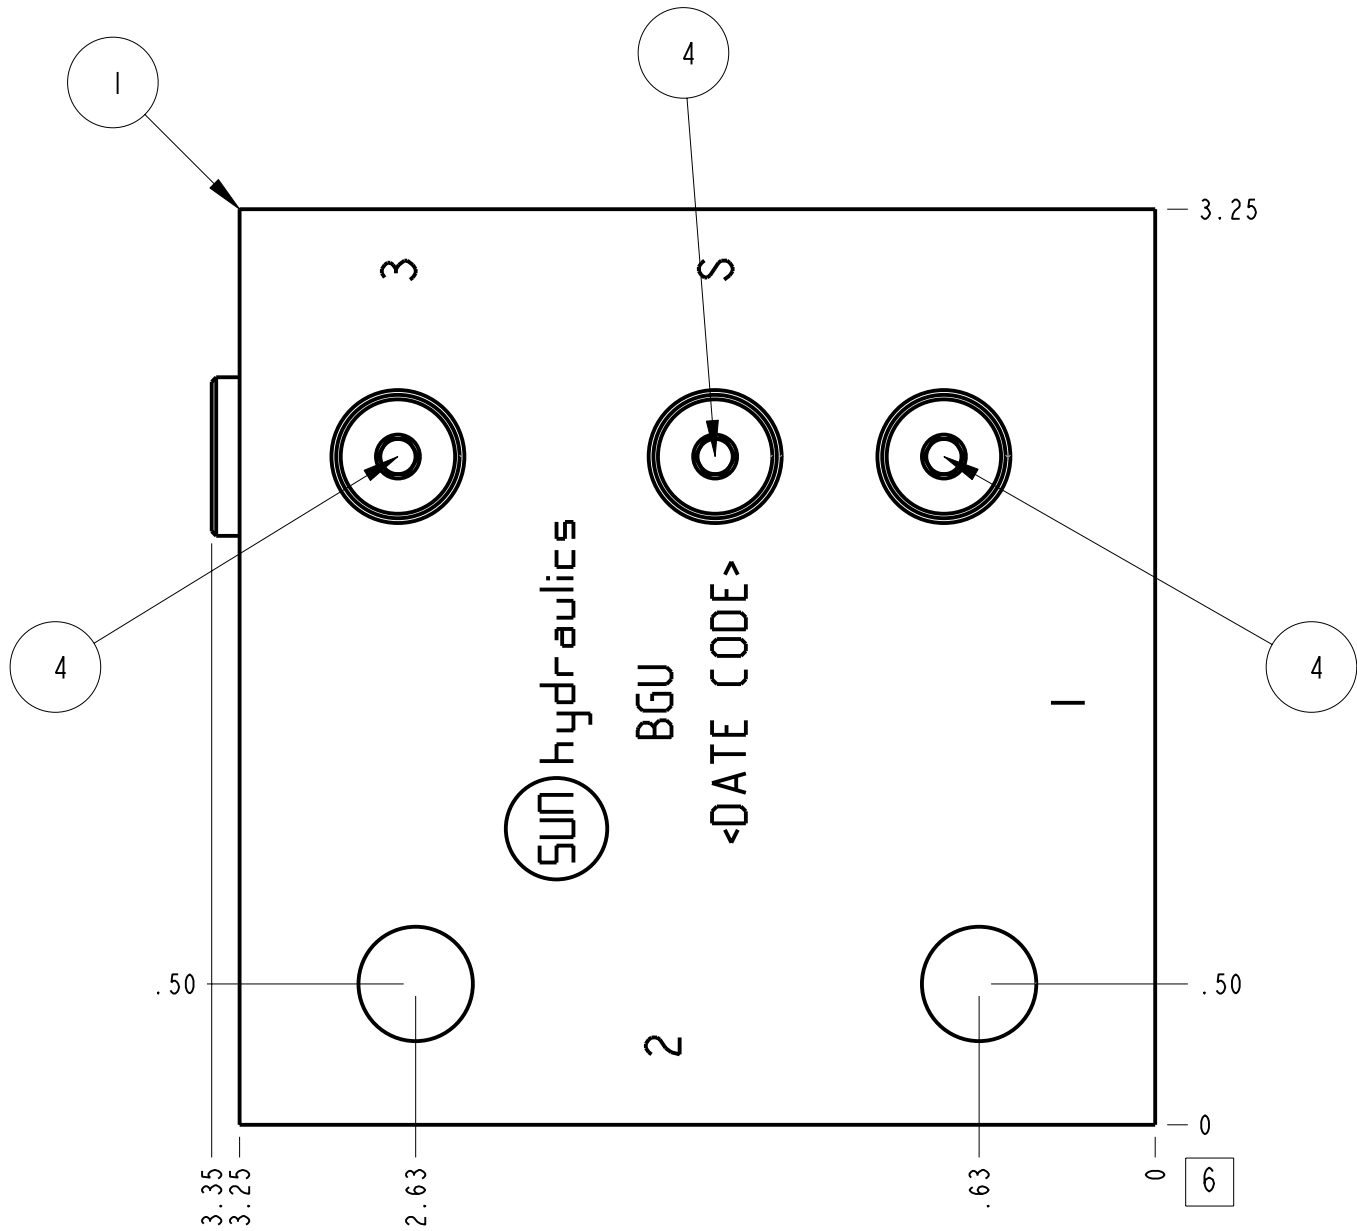
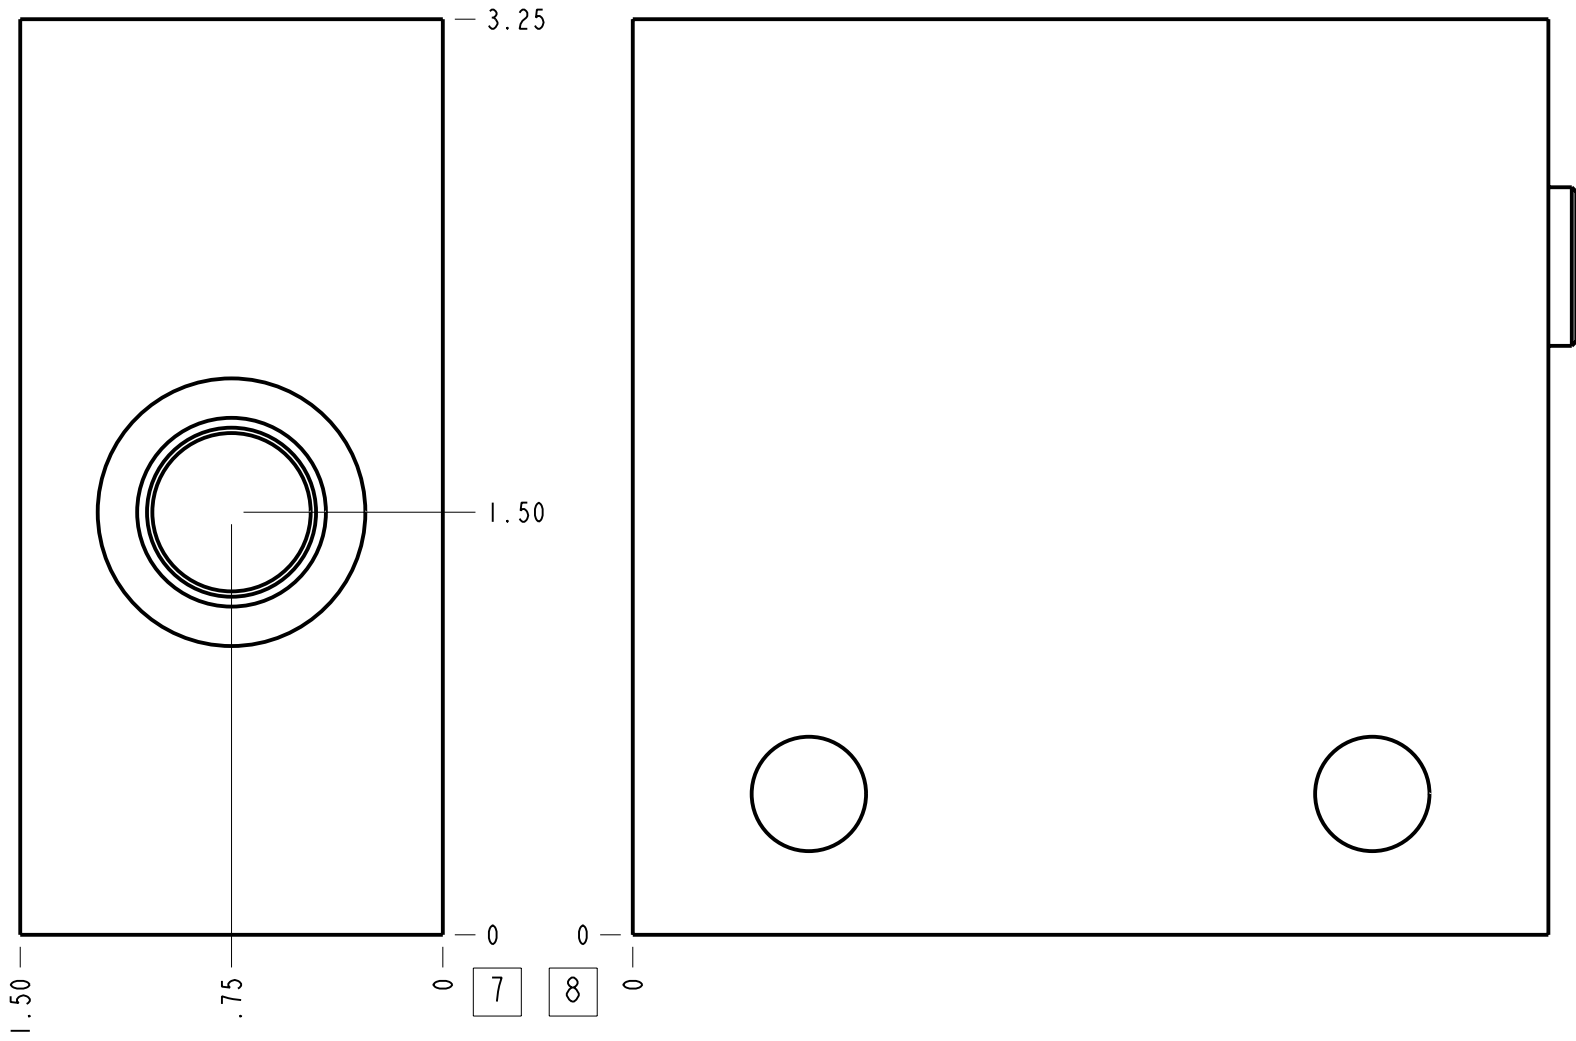


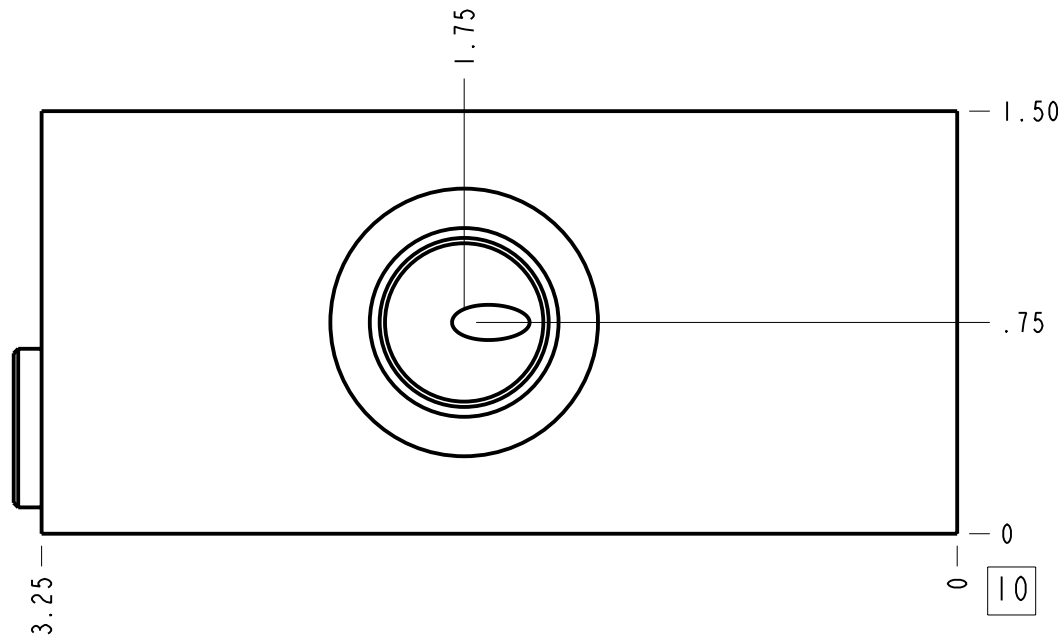

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
BGU	Ports 1 & 2	3/8" BSPP
BGU	Ports 3 & S	1/4" BSPP

Technical Data		U.S. Units	Metric Units
Cavity		T-2A	
Body Features		Ninety degree with shuttle	
Body Type		Line mount	
Interface		None	
Open Cavity Quantity		1	
Weight		1.304 lb.	0,592 kg.
Maximum Operating Pressure - 6061-T651 Aluminum		3000 psi	210 bar
Maximum Operating Pressure - 65-45-12 Ductile Iron		5000 psi	350 bar
Mounting Hole Diameter		.41 in.	10,4 mm
Mounting Hole Depth		Through	
Mounting Hole Quantity		2	
Includes integral cartridge(s)		Yes (see Included Components)	

4	A330-006-002			SAE-2 PLUG	
3	A330-006-004			SAE-4 PLUG	
2	CSZNXXN			SHUTTLE VALVE	
1	150-252-009		6061-T6 ALUMINUM	BODY	
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
MODEL BGU			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE  THIRD ANGLE 
DESCRIPTION T-2A Line mount Ninety degree with shuttle			DATE Jul-02-26	SCALE 1.467	DWG SIZE C
			SHEET 1		