
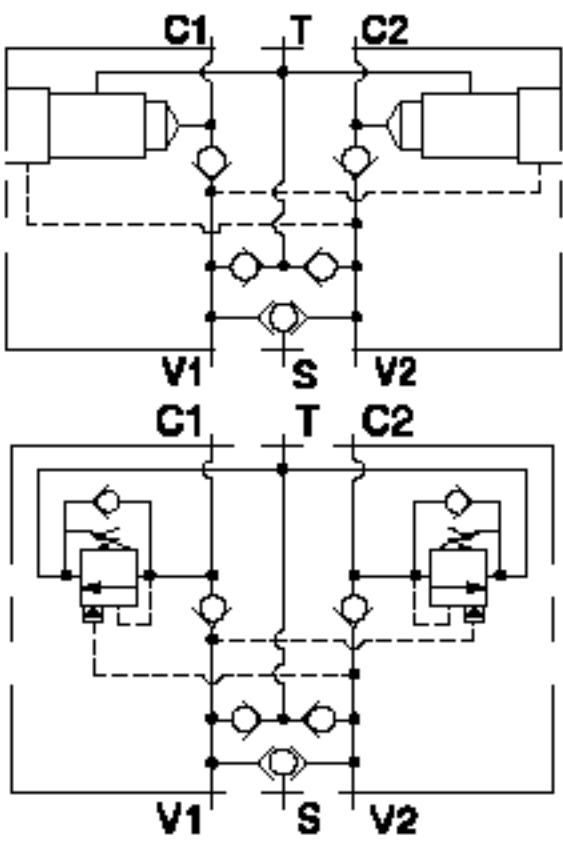
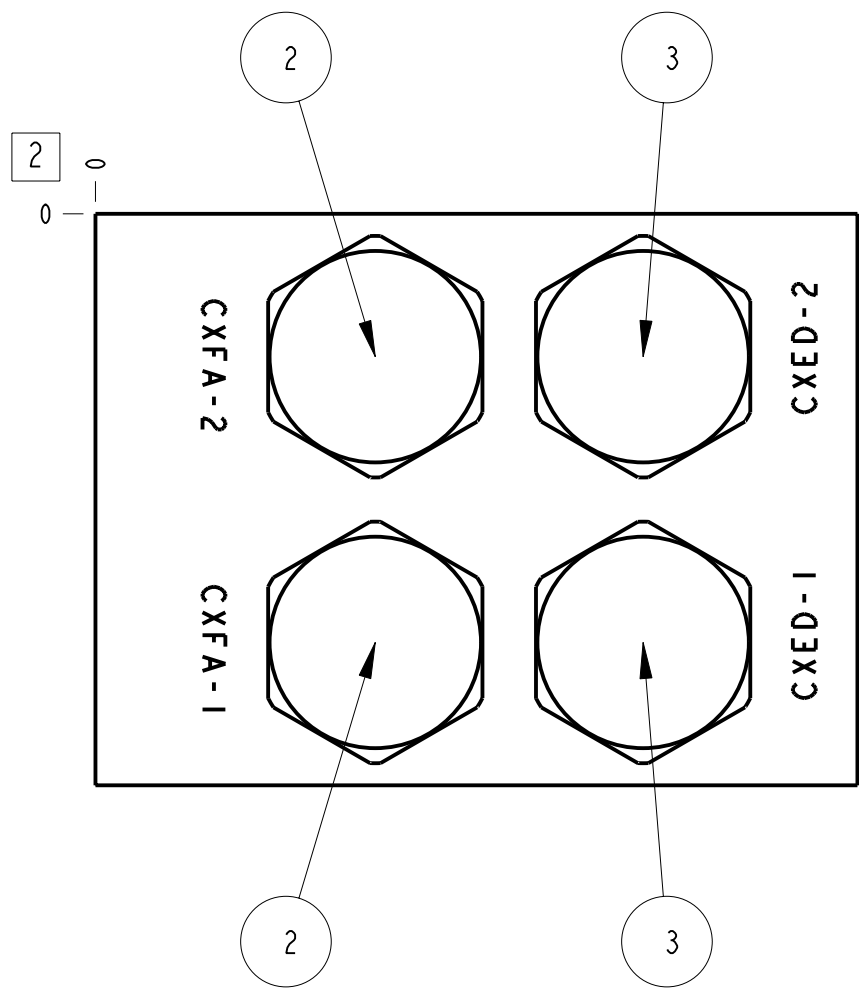
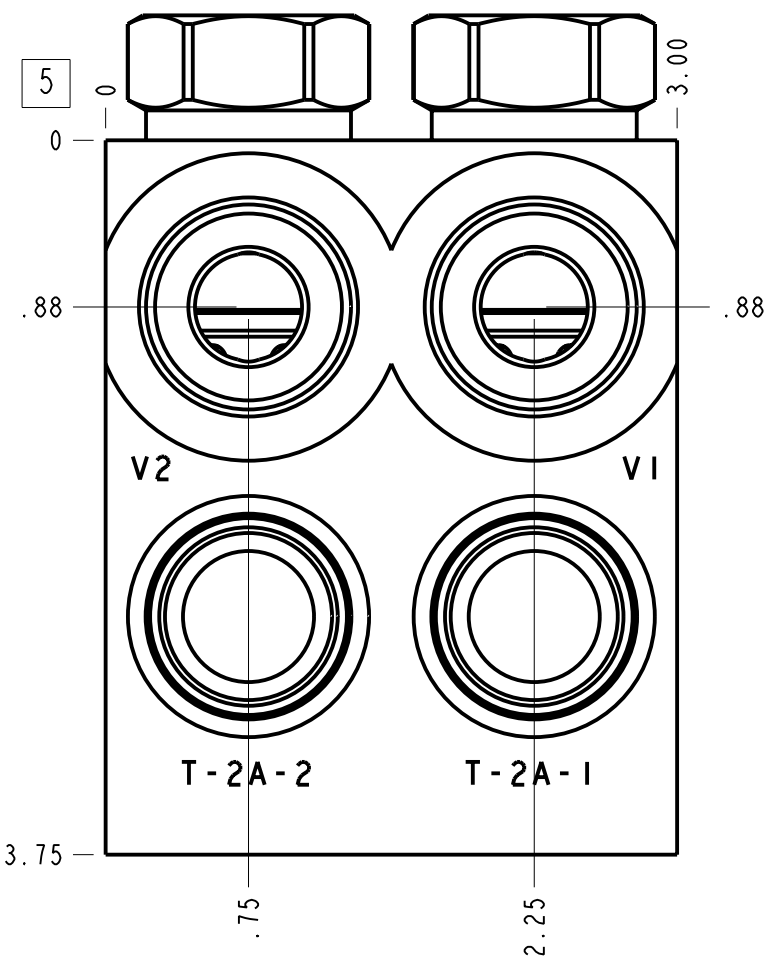
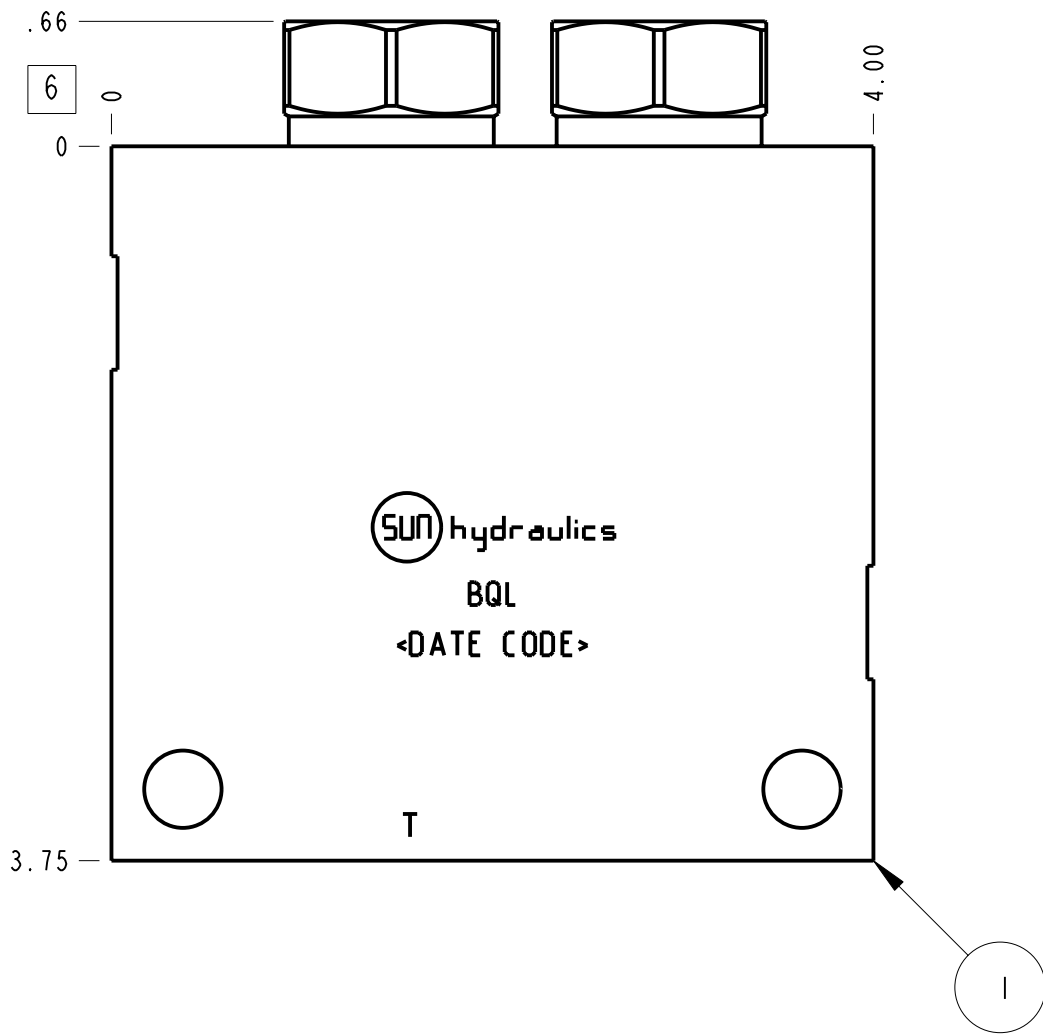
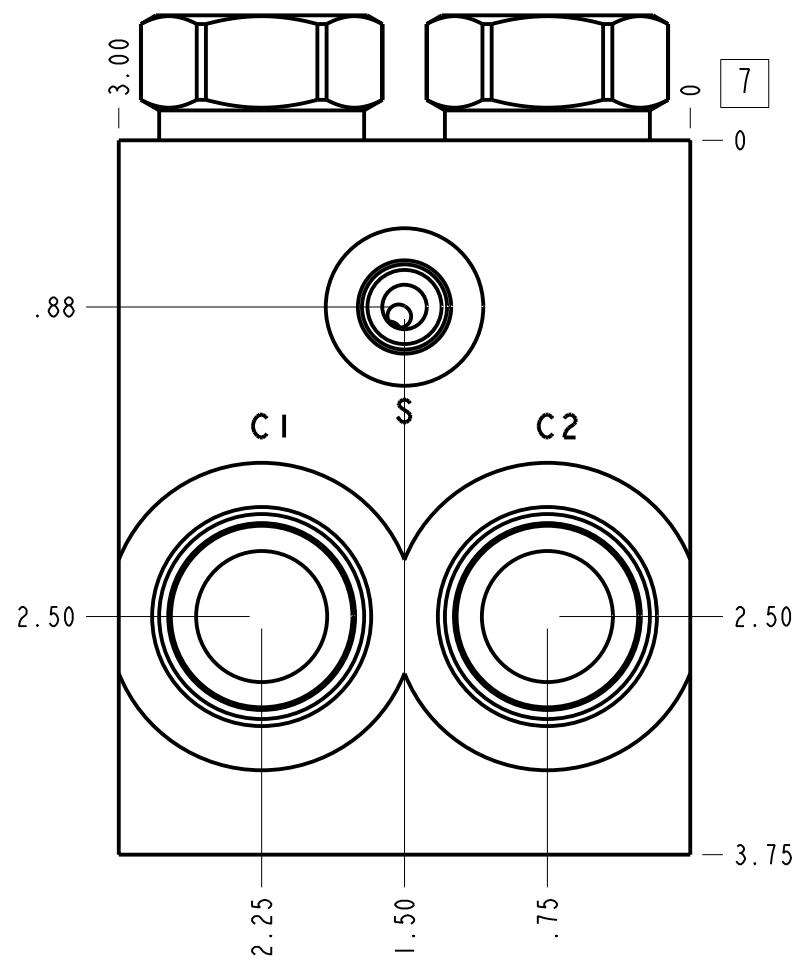


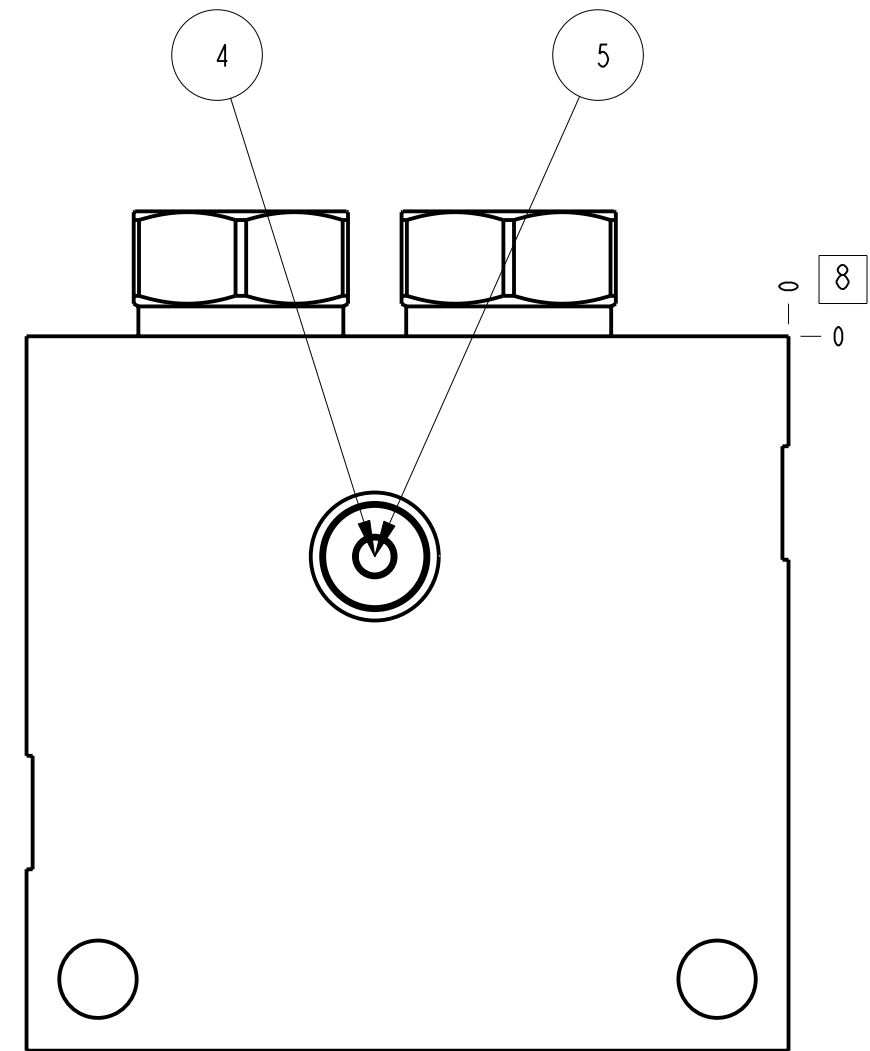

Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
BQL	Ports C1,C2,V1,V2	SAE 12
BQL	Port T	SAE 12
BQL	Port S	SAE 4

Technical Data	U.S. Units	Metric Units
Cavity	T-2A	
Body Features	Cushion lock with make up checks and shuttle	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	2	
Weight	4.491 lb.	2,037 kg.
Mounting Hole Diameter	.42 in.	10,7 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

5	A330-006-004			SAE-4 PLUG	1
4	CSZNXXN			SHUTTLE VALVE	1
3	CXFA-XAN			CHECK VALVE	2
2	CXEDXAN			CHECK VALVE	2
1	150-233-004		6061-T6 ALUMINUM	BODY	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
MODEL BQL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE  THIRD ANGLE 
DESCRIPTION T-2A Line mount (See Technical Data for Body Features)			DATE Oct-29-25	SCALE 0.992	DWG SIZE C
				SHEET 1	