



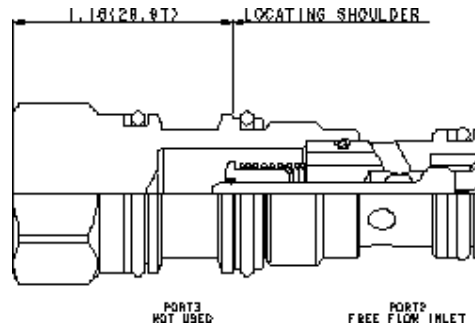

CONFIGURATION

X	Control	Not Adjustable
C	Setting Range	30 psi (2 bar) Cracking Pressure, .016 - .153 in. (0,4 - 3,9 mm)
N	Seal Material	Buna-N
(none) Material/Coating		

Free-flow, side-to-nose cheater check valves with a bypass orifice function as a 2-port check valve in a 3-port cavity. They allow free flow from port 2 to port 1 with a customer specified orifice that controls flow from port 1 to port 2. Port 3 of the cartridge is blocked off.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-11A
Series	1
Capacity	15 gpm
Maximum Operating Pressure	5000 psi
Orifice Range	.016 - .153 in.
Valve Hex Size	7/8 in.
Valve Installation Torque	30 - 35 lbf ft
Seal kit - Cartridge	Buna: 990011007
Seal kit - Cartridge	Polyurethane: 990011002
Seal kit - Cartridge	Viton: 990011006
Model Weight	0.26 lb.

CONFIGURATION OPTIONS

Model Code Example: CNCDArray

CONTROL	(X) SETTING RANGE	(C) SEAL MATERIAL	(N) MATERIAL/COATING
X Not Adjustable	C 30 psi (2 bar) Cracking Pressure, .016 - .153 in. (0,4 - 3,9 mm)	N Buna-N V Viton	(N) Standard Material/Coating /AP Stainless Steel, Passivated /LH Mild Steel, Zinc-Nickel

TECHNICAL FEATURES

- When used in a full time regeneration circuit these valves allow full force to be developed by the cylinder when it comes to a stop. The bypass orifice drops the rod end pressure to zero when flow out of the rod stops.
- The customer specified orifice diameter is stamped on one of the cartridge's hex faces.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

