MODEL
DKJP

Normally closed, balanced poppet, logic element - pressure adjustable
SERIES 4 / CAPACITY: 120 gpm / CAVITY: T-24A

sunhydraulics.com/model/DKJP

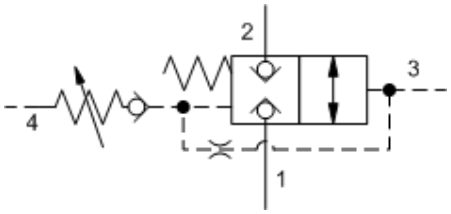

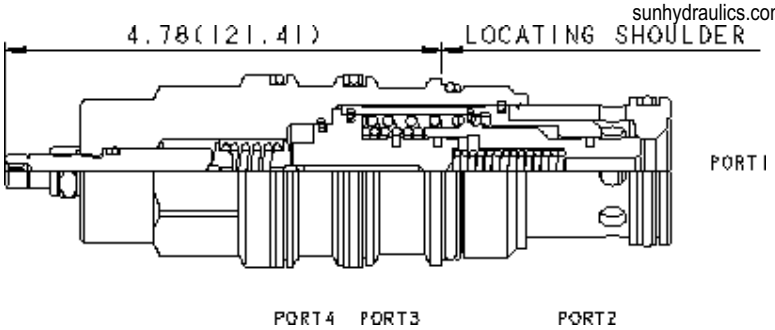

CONFIGURATION

L	Control	Standard Screw Adjustment
A	Adjustment Range	200 - 3000 psi (14 - 210 bar), 1000 psi (70 bar) Standard Setting
N	Seal Material	Buna-N
(none)	Material/Coating	

This is a normally closed, balanced poppet, switching element. When pilot pressure is applied to port 3, the poppet remains closed until the pilot pressure reaches the setting established by the integral pilot relief stage, at which point the poppet shifts to the open position.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-24A
Series	4
Capacity	120 gpm
Maximum Operating Pressure	5000 psi
Minimum Pilot Pressure Required to Shift Valve	300 psi
Control Pilot Flow	See Performance Data
Maximum Valve Leakage at 110 SUS (24 cSt)	10 drops/min.@5000 psi
Valve Hex Size	1 5/8 in.
Valve Installation Torque	350 - 375 lbf ft
Adjustment Screw Internal Hex Size	5/32 in.
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990024007
Seal kit - Cartridge	Polyurethane: 990024002
Seal kit - Cartridge	Viton: 990024006
Model Weight	3.78 lb.

CONFIGURATION OPTIONS

Model Code Example: DKJPLAN

CONTROL (L)

- **L** Standard Screw Adjustment
- **C** Tamper Resistant - Factory Set
- **K** Handknob

ADJUSTMENT RANGE (A)

- **A** 200 - 3000 psi (14 - 210 bar), 1000 psi (70 bar) Standard Setting
- **B** 200 - 1500 psi (14 - 105 bar), 1000 psi (70 bar) Standard Setting
- **W** 200 - 4500 psi (14 - 315 bar), 1000 psi (70 bar) Standard Setting

SEAL MATERIAL (N)

- **N** Buna-N
- **V** Viton

MATERIAL/COATING

- Standard Material/Coating
- **/AP** Stainless Steel, Passivated

© 2025 Sun Hydraulics

TECHNICAL FEATURES

- Unique balanced construction provides predictable switching with 5000 psi (350 bar) at both port 1 and port 2. When the remote pressure signal at port 3 exceeds the internal valve setting, the valve shifts to the open position.
- Any backpressure at the drain port is directly additive to the valve setting.
- Valve will reseat when the pilot pressure falls to 85% of the cracking value.
- Port 1 and port 2 are fully sealed from port 3 and port 4. Ports 3 and 4 are positively sealed.
- Leakage rate between port 1 and port 2 is very low, typically less than 10 drops/min. at 5000 psi (0,7 cc/min at 350 bar).
- All ports will accept 5000 psi (350 bar).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

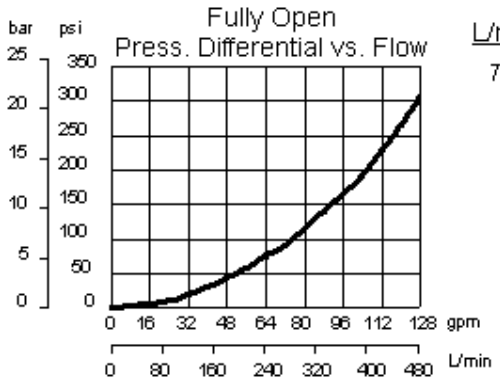

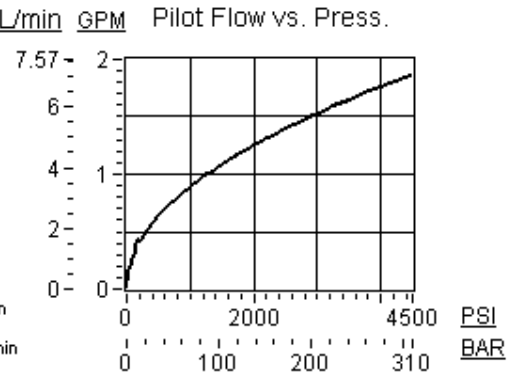

© 2025 Sun Hydraulics