





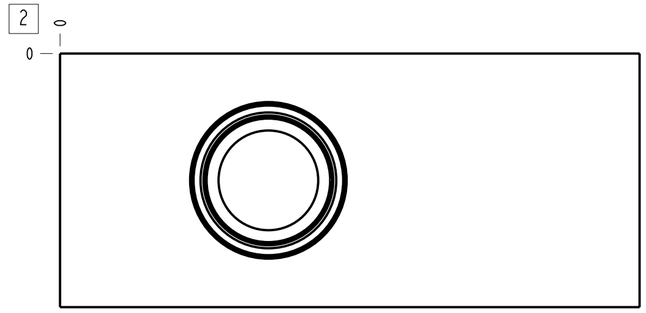


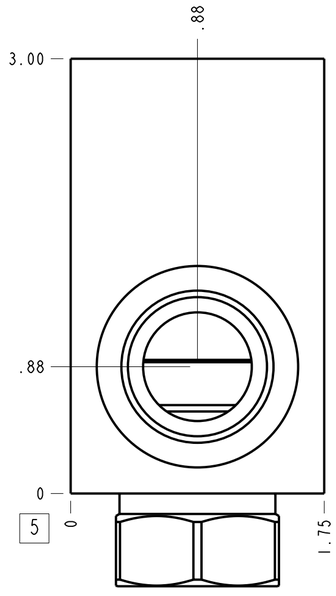

| Technical Data | U.S. Units | Metric Units |
|---|---|---|
| Cavity | T-5A | |
| Body Features | Ninety degree with reverse flow check | |
| Body Type | Line mount | |
| Interface | None | |
| Open Cavity Quantity | 1 | |
| Weight | 1.954 lb. | 0,886 kg. |
| Mounting Hole Diameter | .34 in. | 8.6 mm |
| Mounting Hole Depth | Through | |
| Mounting Hole Quantity | 2 | |
| Includes integral cartridge(s) | Yes (see Included Components) | |

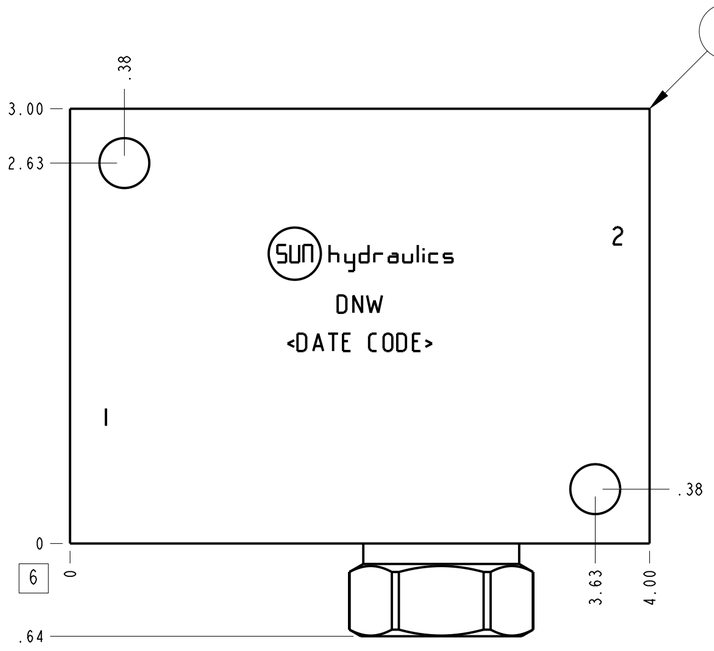

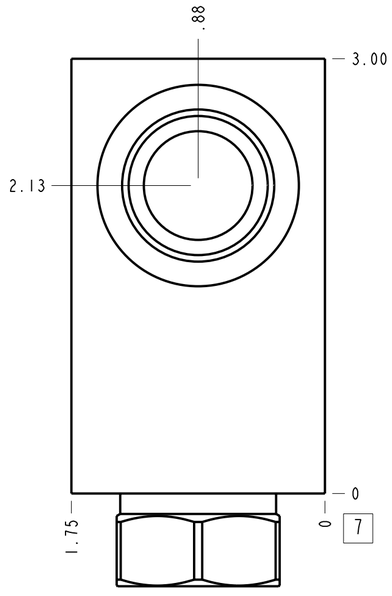


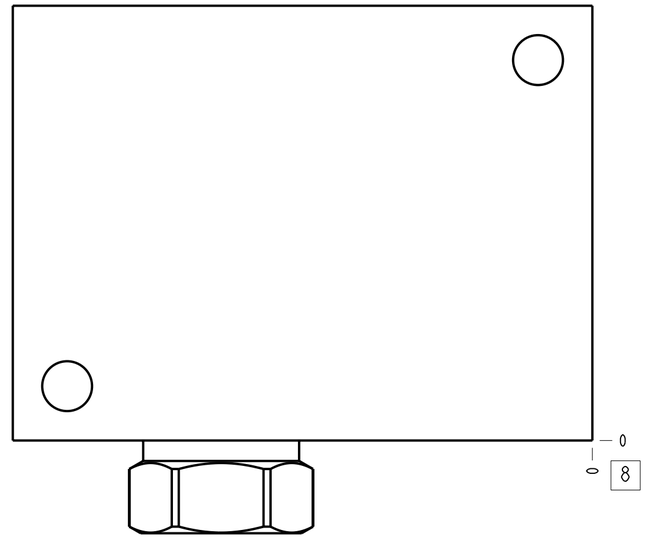

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

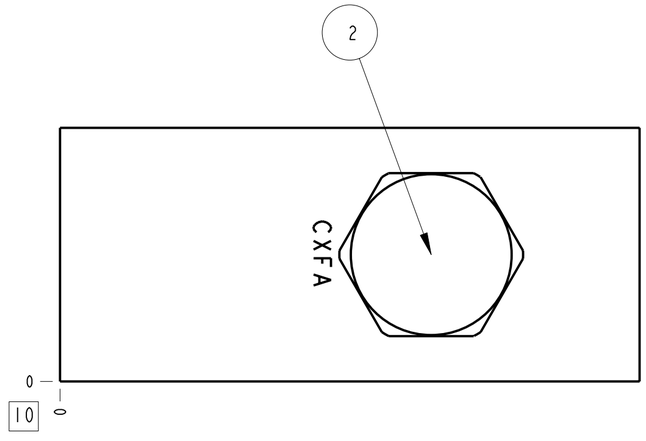


| Port Headings | | |
|---|---|---|
| Product | Port | Size |
| DNW | All Ports | 3/4" BSPP |

| ITEM | PART NO. | SETTING | MATERIAL | PART NAME | QTY |
|---|---|---|---|---|---|
| 2 | CXFA-XCN | | | CHECK VALVE | 1 |
| 1 | 151-669-009 | | 6061-T6 ALUMINUM | BODY | 1 |

MODEL: DNW

ALL DIMENSIONS IN INCH
VIEWS ARE THIRD ANGLE

FIRST ANGLE / THIRD ANGLE

DESCRIPTION: T-5A Line mount
Ninety degree with reverse flow check

| DATE | SCALE | DWG SIZE | SHEET |
|---|---|---|---|
| May-19-26 | 1.237 | C | 1 |

sun hydraulics