
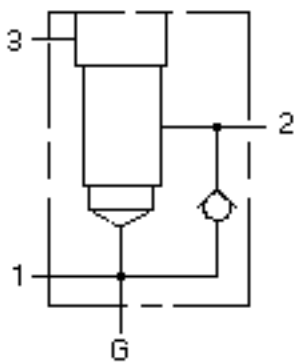
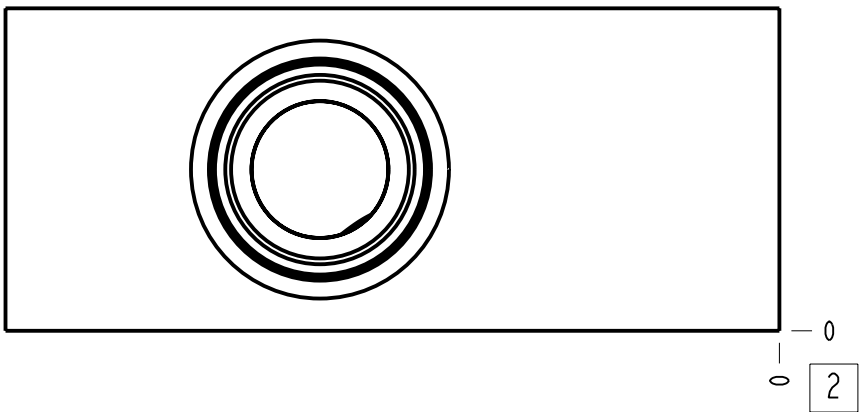
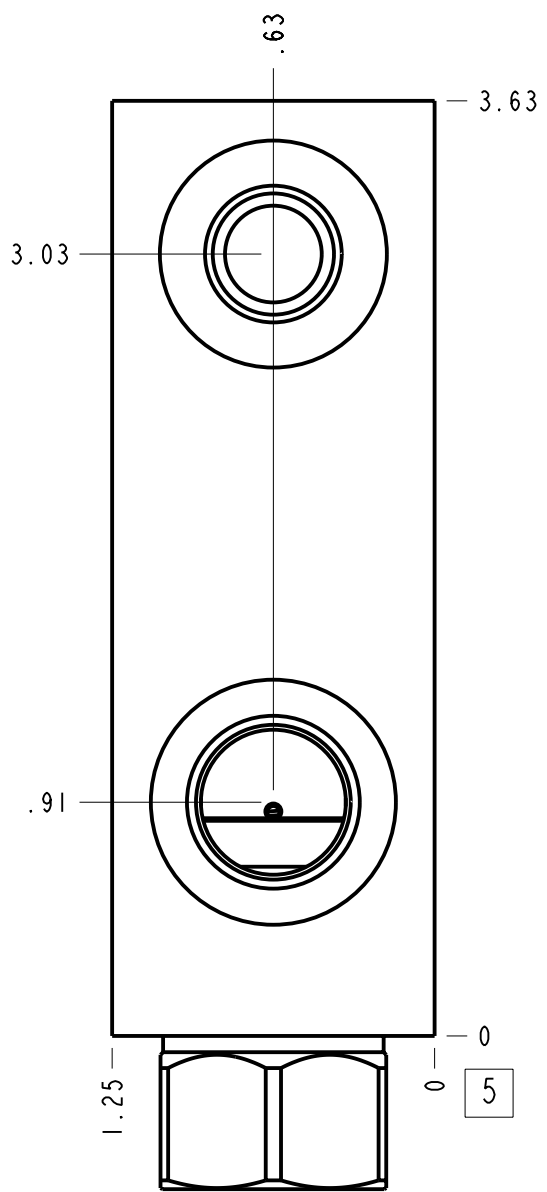
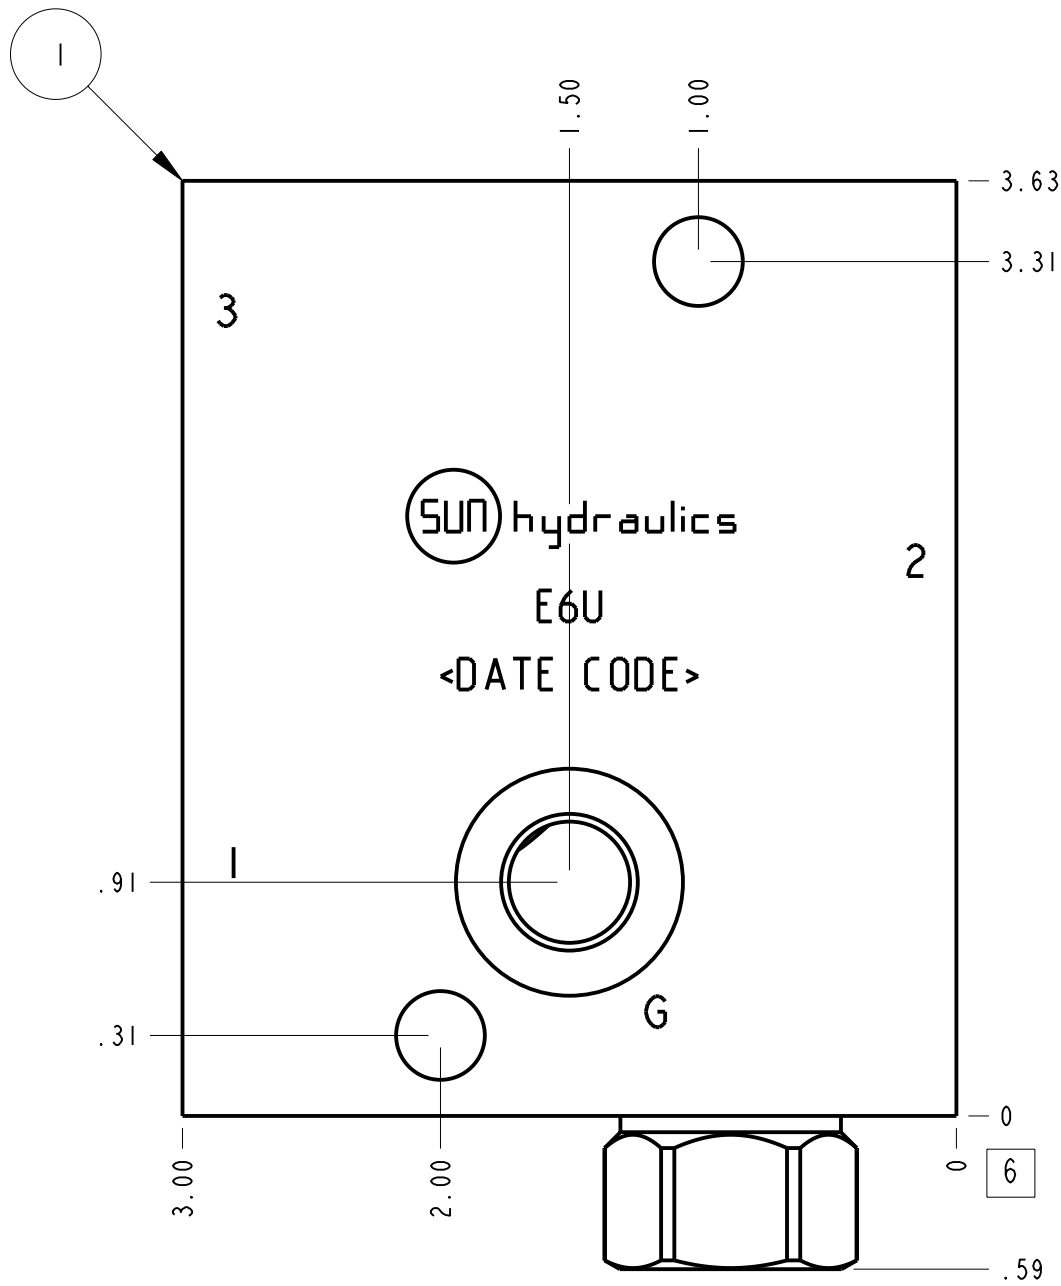
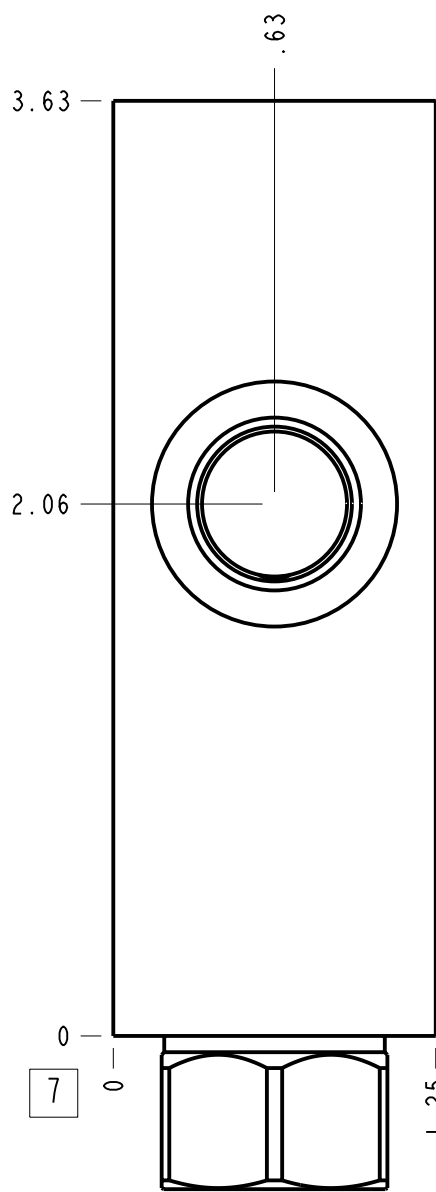
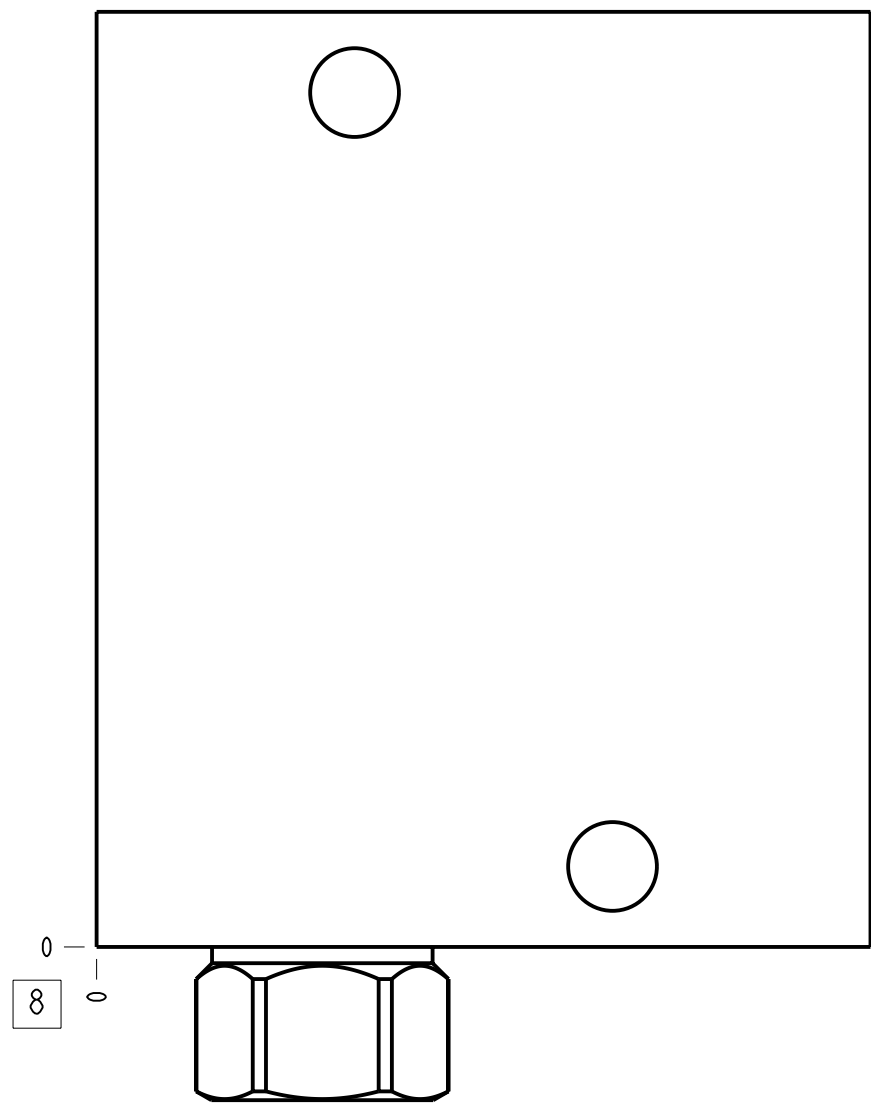


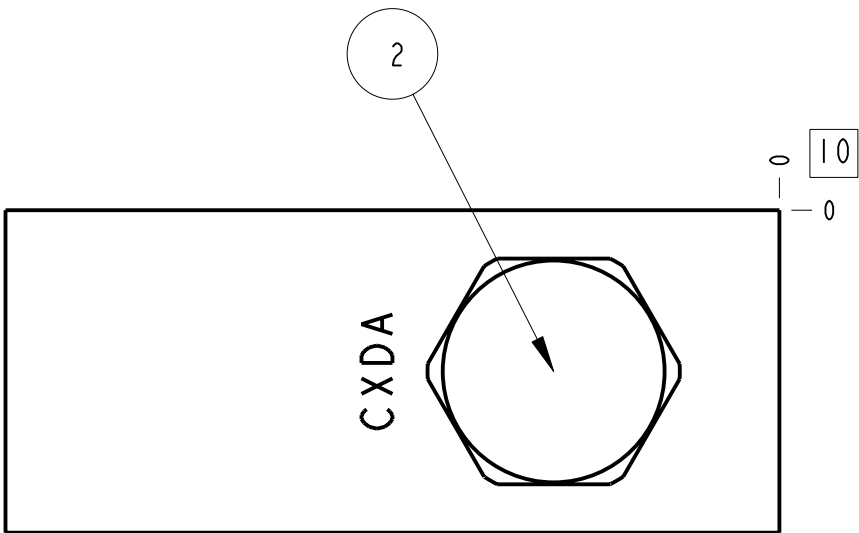

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
E6U	Ports 1 & 2	3/8" BSPP
E6U	Port 3	1/4" BSPP
E6U	Gage Port	1/4" BSPP

Technical Data	U.S. Units	Metric Units
Cavity	T-11A	
Body Features	Ninety degree with reverse flow check - sequence	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	1.257 lb.	0,570 kg.
Check Cracking Pressure	30 psi	2 bar
Mounting Hole Diameter	.34 in.	8.6 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

2	CXDA-XCN			CHECK VALVE	
1	151-019-008		6061-T6 ALUMINUM	BODY	
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	
MODEL E6U			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE  THIRD ANGLE 
DESCRIPTION T-11A Line mount (See Technical Data for Body Features)			DATE Jan-22-25	SCALE 1.344	DWG SIZE C
			SHEET 1		