

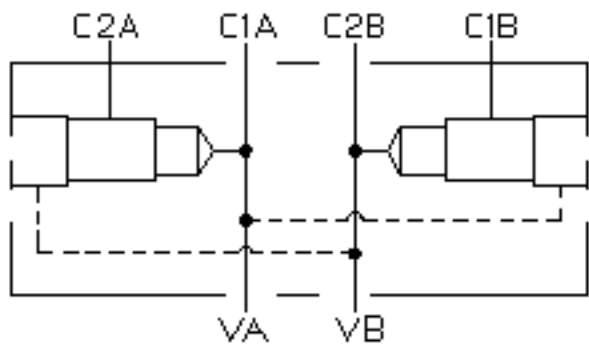
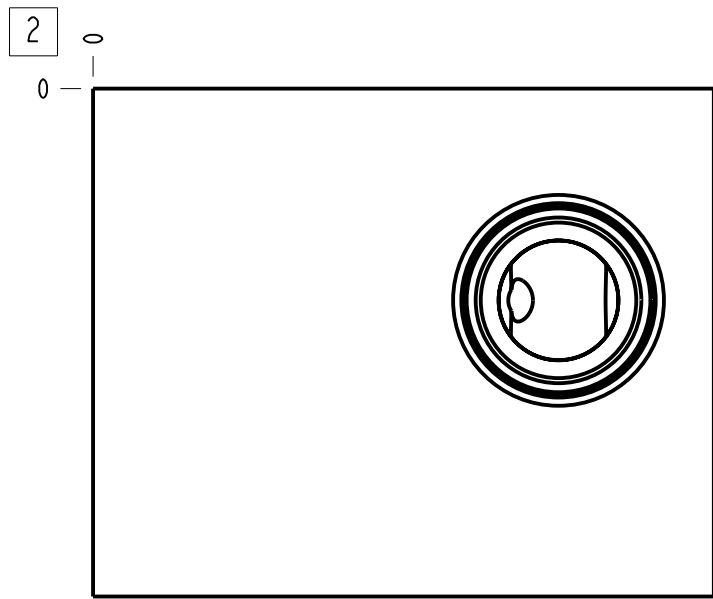
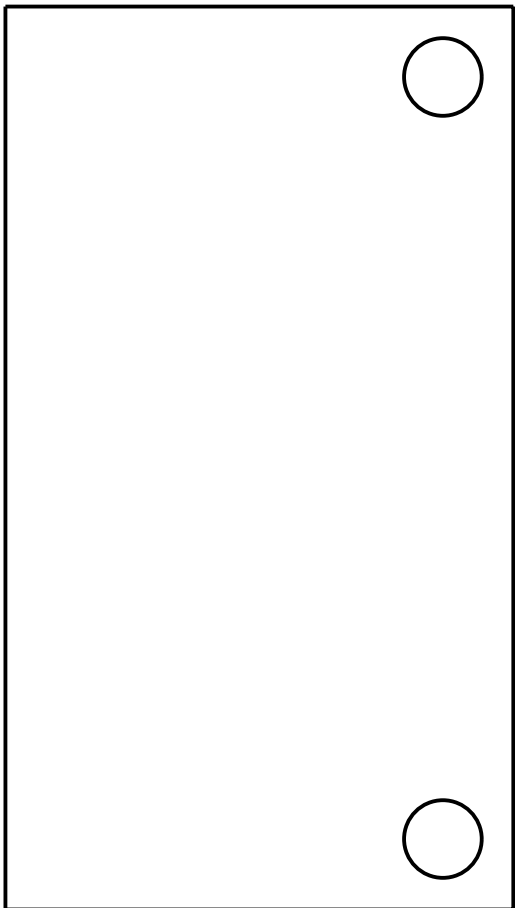
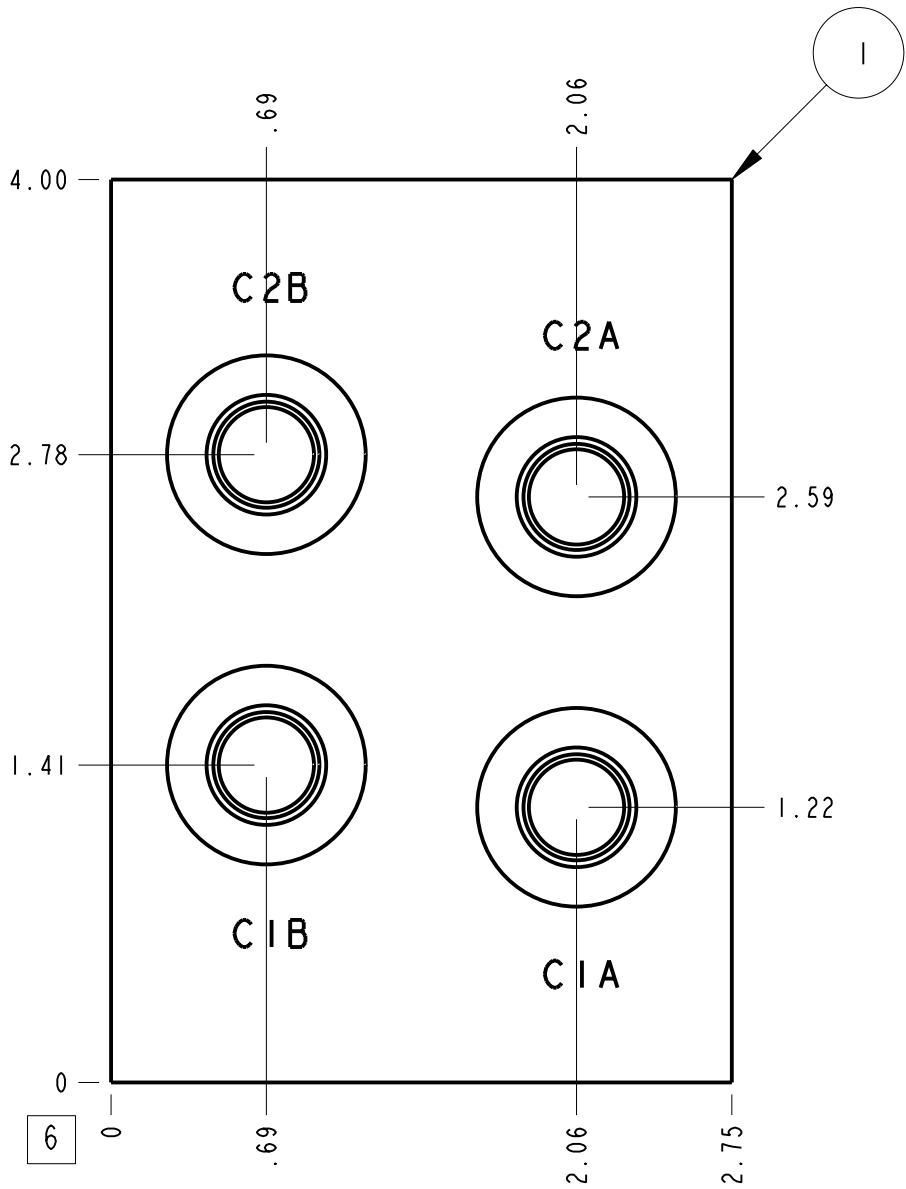


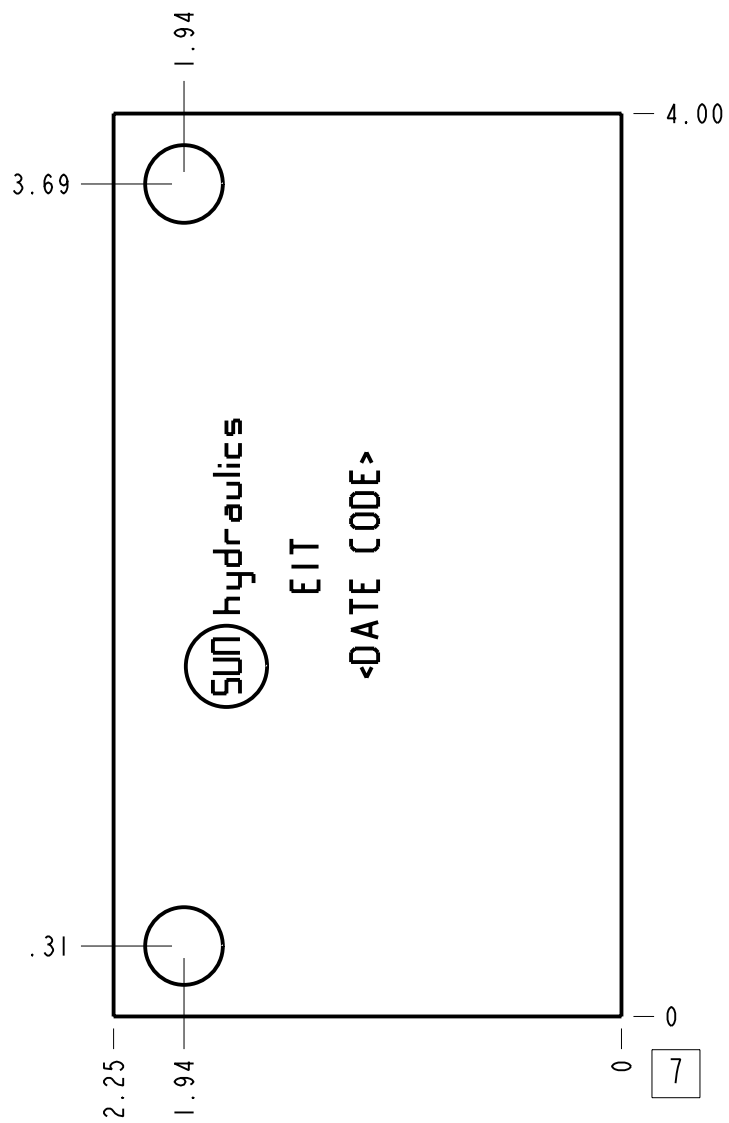


Technical Data	U.S. Units	Metric Units
Cavity	T-11A	
Body Features	2 cylinder sequence, direct acting	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	2	
Weight	2.038 lb.	0,925 kg.
Mounting Hole Diameter	.34 in.	8.6 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	

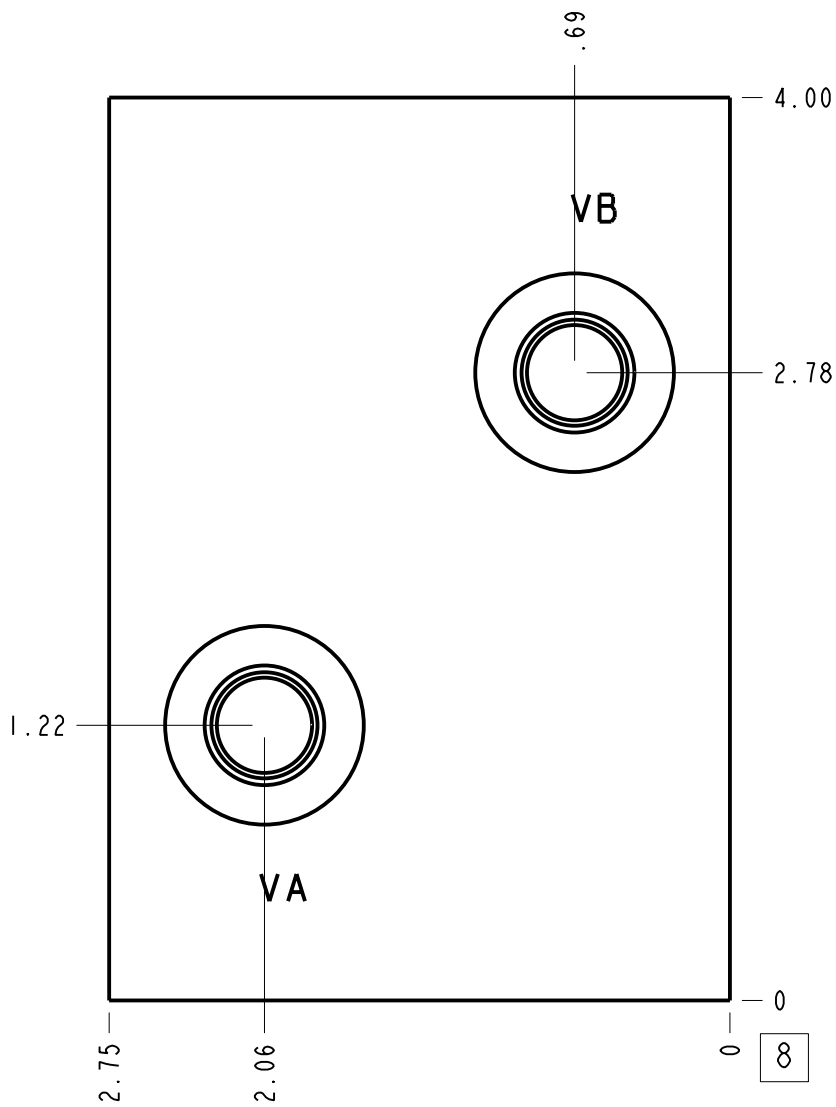

Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
EIT	All Ports	1/4" BSPP

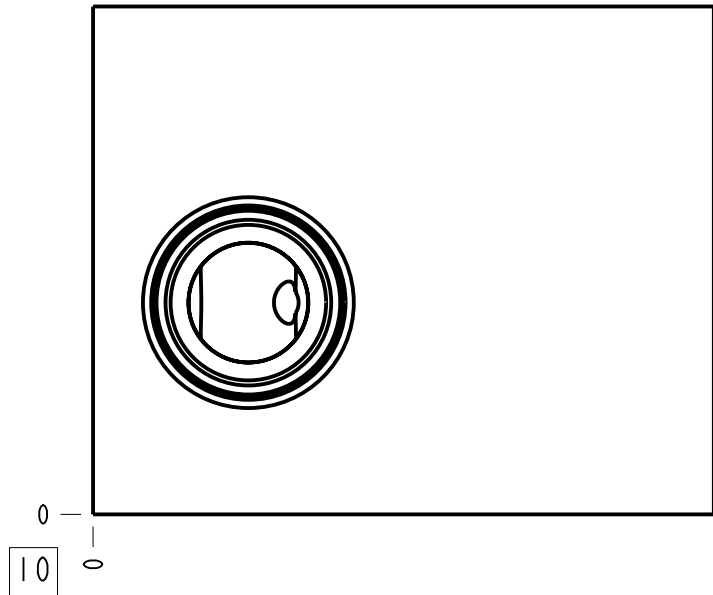

I	153-766-007		6061-T6 ALUMINUM	BODY	I
I T E M	PART NO.	SETTING	MATERIAL	PART NAME	Q T Y
MODEL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		
EIT			FIRST ANGLE THIRD ANGLE		
DESCRIPTION			DATE	SCALE	DWG SIZE SHEET
T-11A Line mount 2 cylinder sequence, direct acting			Mar-13-26	1.176	C I
			SUN hydraulics®		