



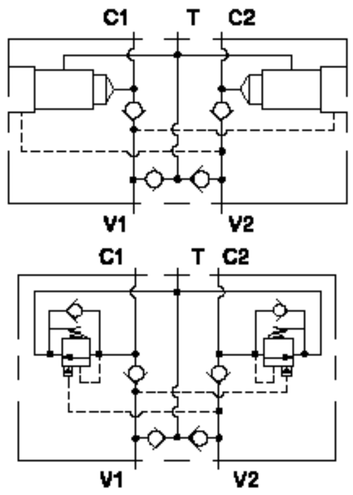


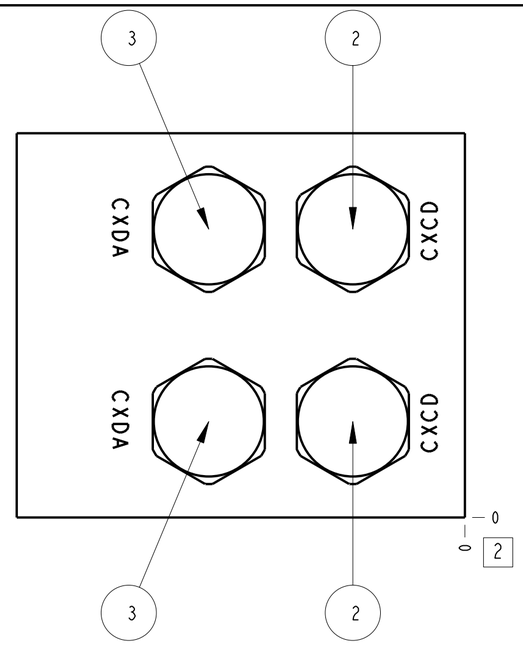


Technical Data	U.S. Units	Metric Units
Cavity	T-11A	
Body Features	Cushion lock with make up checks	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	2	
Weight	3.158 lb.	1,432 kg.
Mounting Hole Diameter	.34 in.	8.6 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Mounting Face Number	6	
Includes integral cartridge(s)	Yes (see Included Components)	

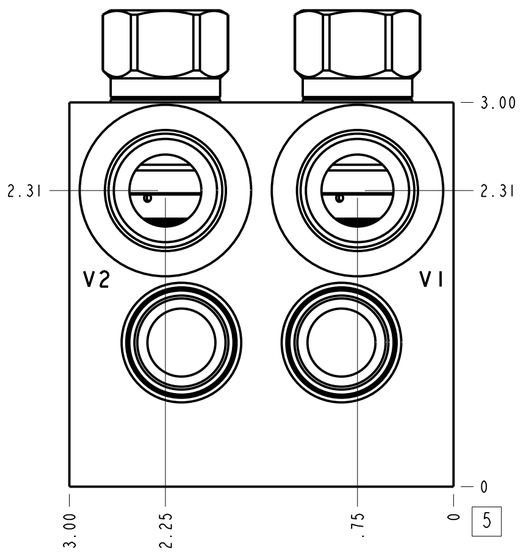

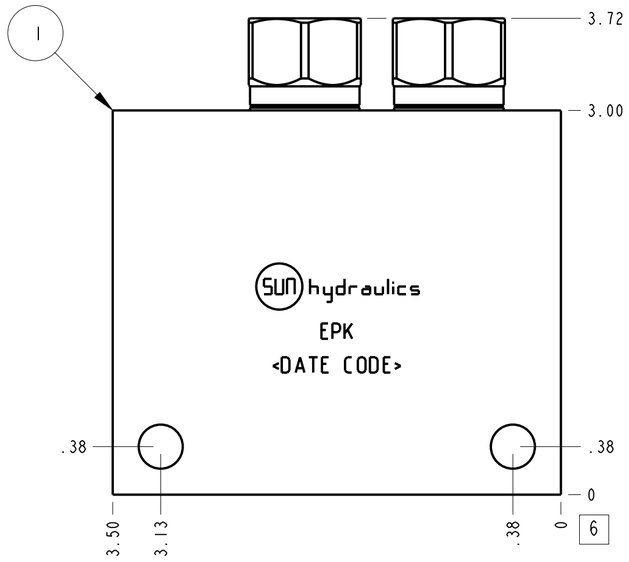


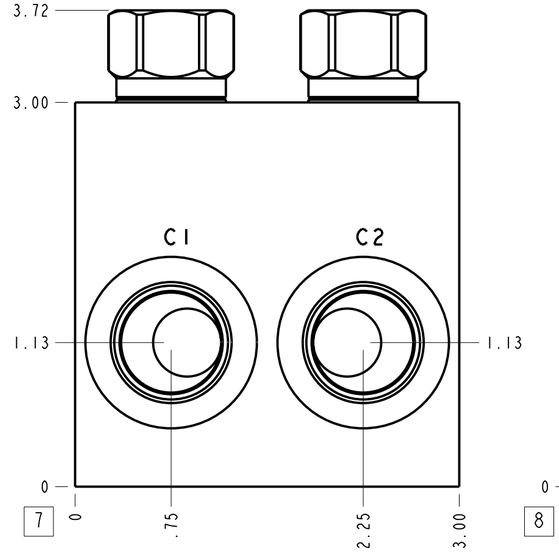

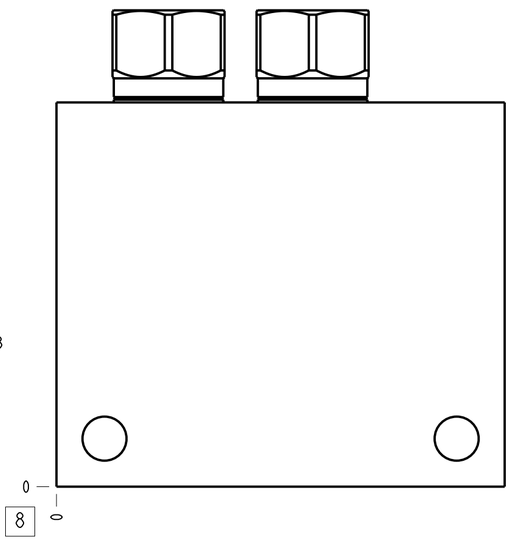

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

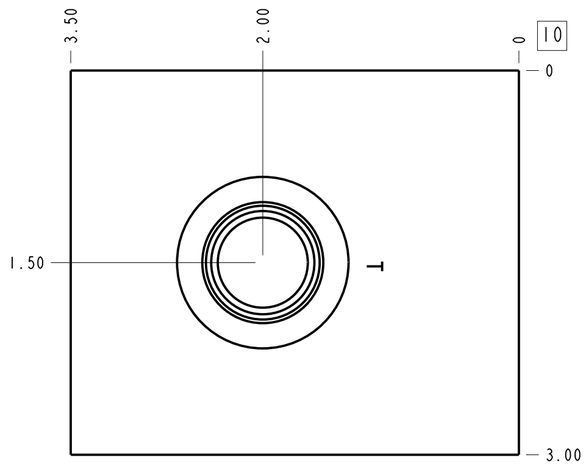

Port Headings		
Product	Port	Size
EPK	All Ports	SAE 10

ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
3	CXDAXAN			CHECK VALVE	2
2	CXCDXAN			CHECK VALVE	2
1	150-835-004		6061-T6 ALUMINUM	BODY	1

MODEL: EPK

ALL DIMENSIONS IN INCH
VIEWS ARE THIRD ANGLE

FIRST ANGLE / THIRD ANGLE

DESCRIPTION: T-11A Line mount
Cushion lock with make up checks

DATE	SCALE	DWG SIZE	SHEET
Feb-13-26	1.094	C	1

sun hydraulics®