



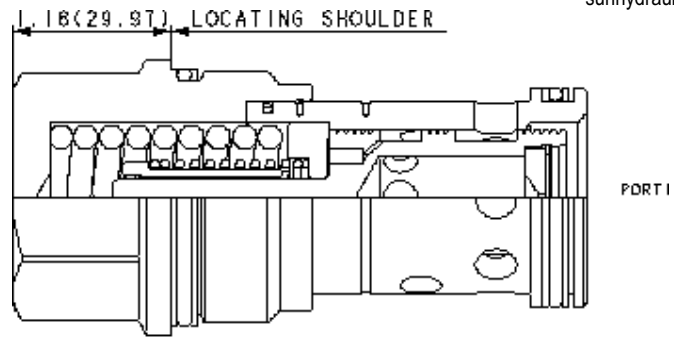

CONFIGURATION

X	Control	Not Adjustable
A	Setting Range	Replaceable Orifice .2 - 50 gpm (1 - 200 L/min.)
N	Seal Material	Buna-N
(none) Material/Coating		

Fixed-orifice, pressure-compensated flow controls with reverse-flow check provide precise flow regulation for meter-in or meter-out applications where there may be wide pressure fluctuations. An integral high-capacity check valve provides unrestricted flow from port 2 to port 1. The flow setting is specified by the user and is set at the factory.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-18A
Series	4
Capacity	50 gpm
Maximum Operating Pressure	5000 psi
Valve Hex Size	1 5/8 in.
Valve Installation Torque	350 - 375 lbf ft
Adjustment Screw Internal Hex Size	5/32 in.
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990018007
Seal kit - Cartridge	Polyurethane: 990018002
Seal kit - Cartridge	Viton: 990018006
Model Weight	2.01 lb.

CONFIGURATION OPTIONS

Model Code Example: FCFBXAN

CONTROL	(X) SETTING RANGE	(A) SEAL MATERIAL	(N) MATERIAL/COATING
X Not Adjustable	A Replaceable Orifice .2 - 50 gpm (1 - 200 L/min.)	N Buna-N	Standard Material/Coating
L Tuning Adjustment		V Viton	/AP Stainless Steel, Passivated
K Handknob			

TECHNICAL FEATURES

- Customer must specify a flow rating. Factory set flow ratings are within +/- 10% of the requested setting.
- The tuneable control option provides +/- 20% variation from the nominal factory pre-set flow. Turn the adjustment clockwise to increase.
- The sharp-edged orifice design minimizes flow variations due to viscosity changes.
- All 2-port flow control cartridges are physically and functionally interchangeable (i.e. same flow path, same cavity for a given frame size). However, cartridge extension dimensions from the mounting surface may vary.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

