

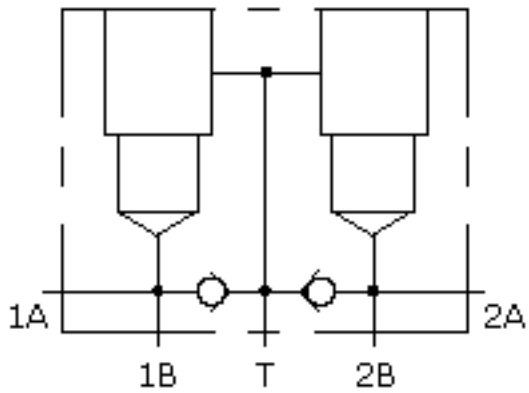
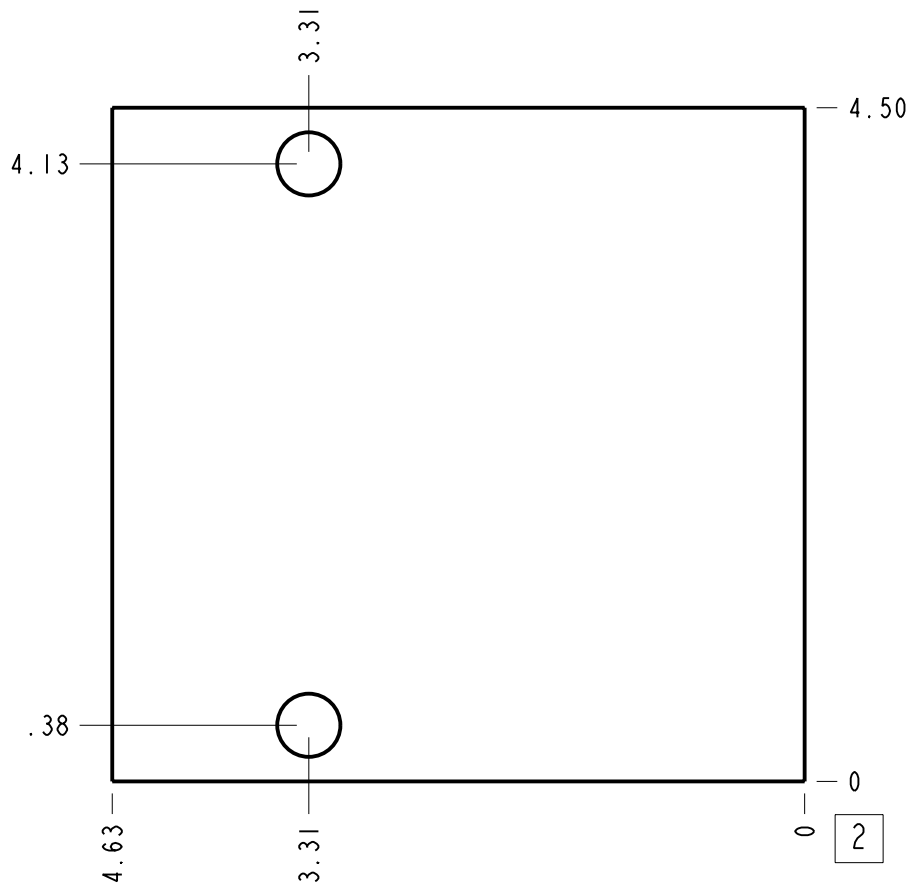
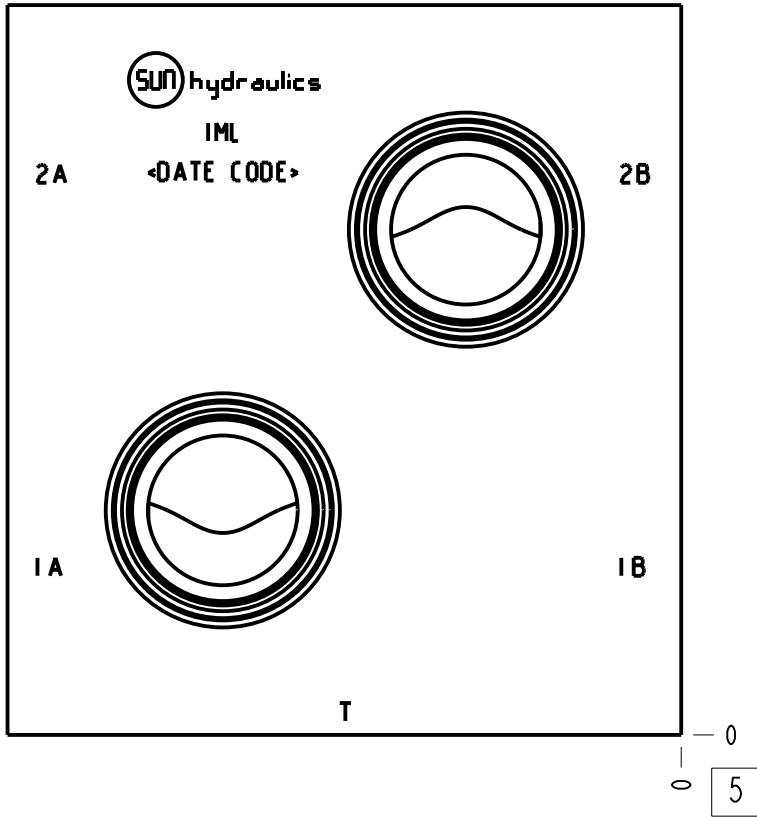
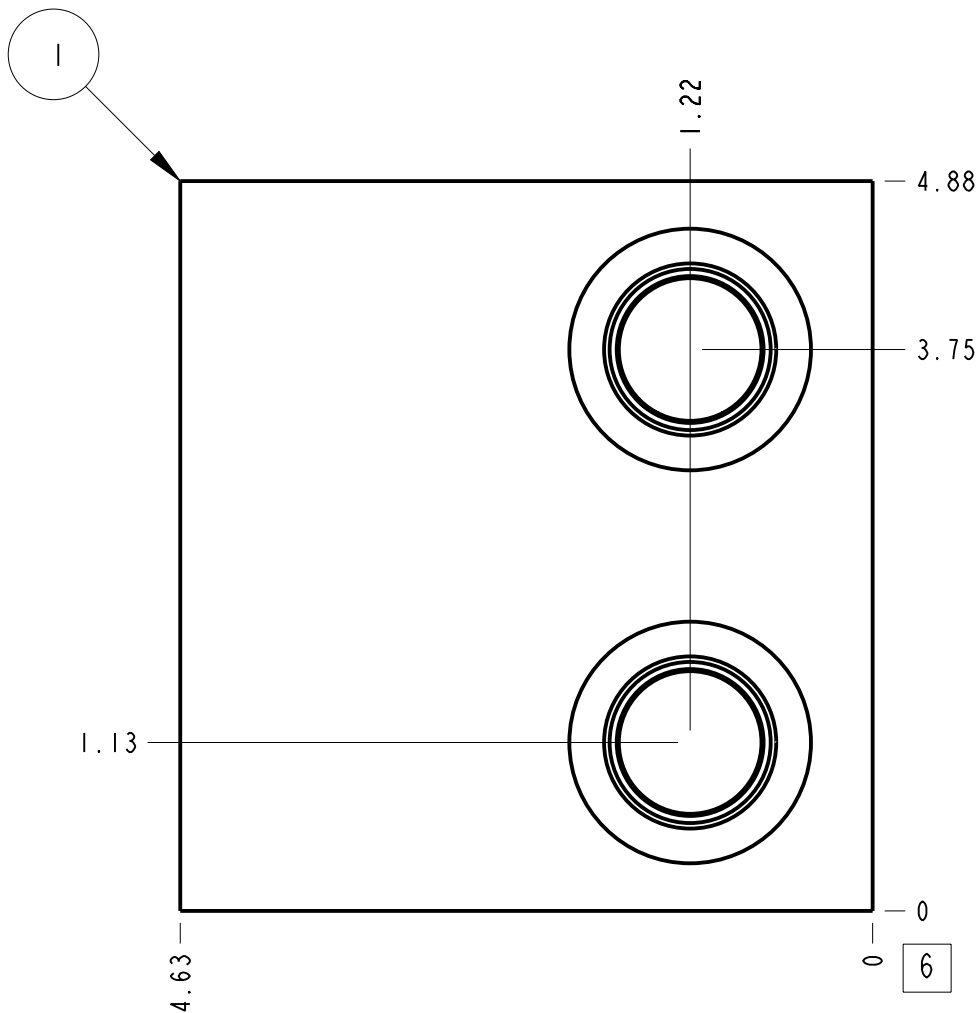


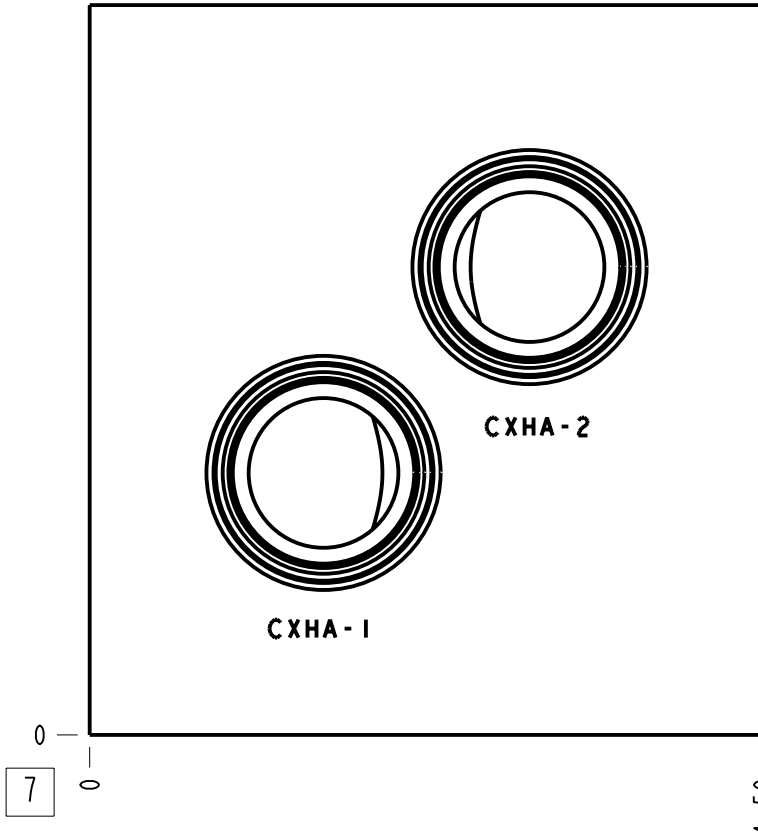


Technical Data	U.S. Units	Metric Units
Cavity	T-16A	
Body Features	Cross port with make up checks	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	2	
Weight	9.113 lb.	4,134 kg.
Mounting Hole Diameter	.42 in.	10,7 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

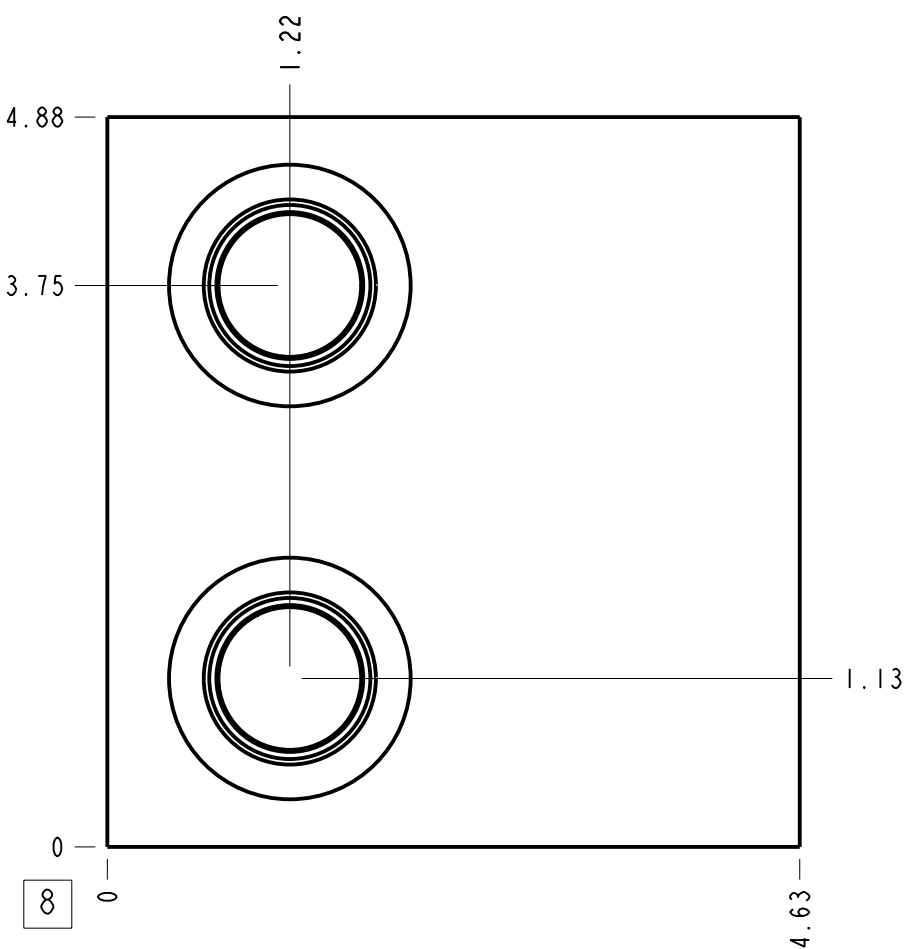

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.
3. Items without balloons are shipped loose.

Port Headings		
Product	Port	Size
IML	All Ports	SAE 12

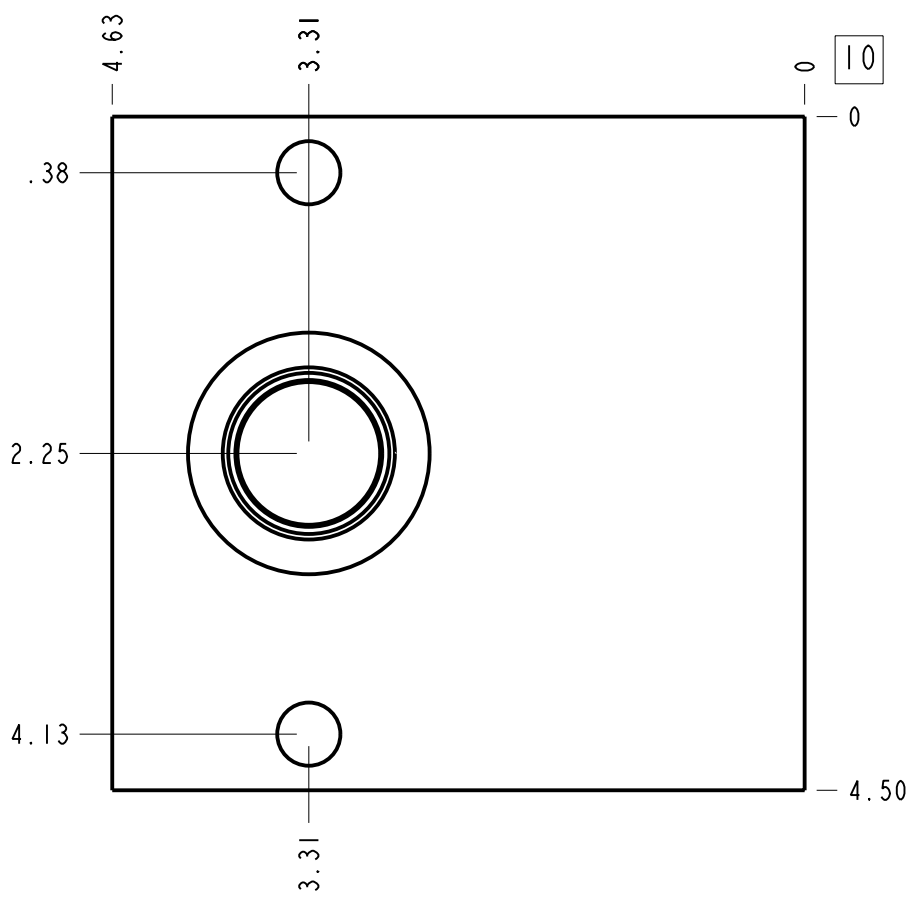

2	CXHAXAN			MODEL	2
1	151-172-004		6061-T6 ALUMINUM	BODY	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
MODEL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		
DESCRIPTION			DATE	SCALE	DWG SIZE SHEET
T-16A Line mount Cross port with make up checks			Jun-23-25	0.780	C 1
			FIRST ANGLE THIRD ANGLE		
			SUN hydraulics®		