
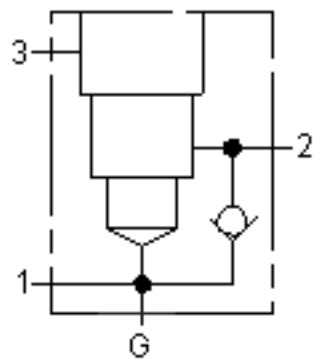
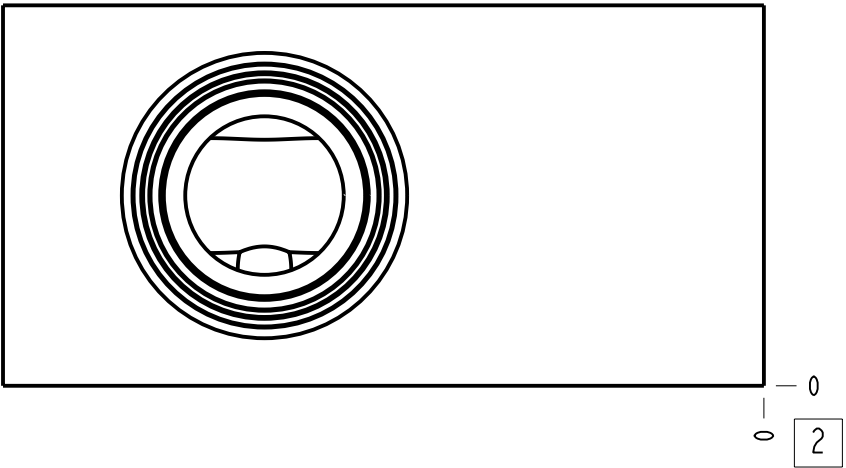
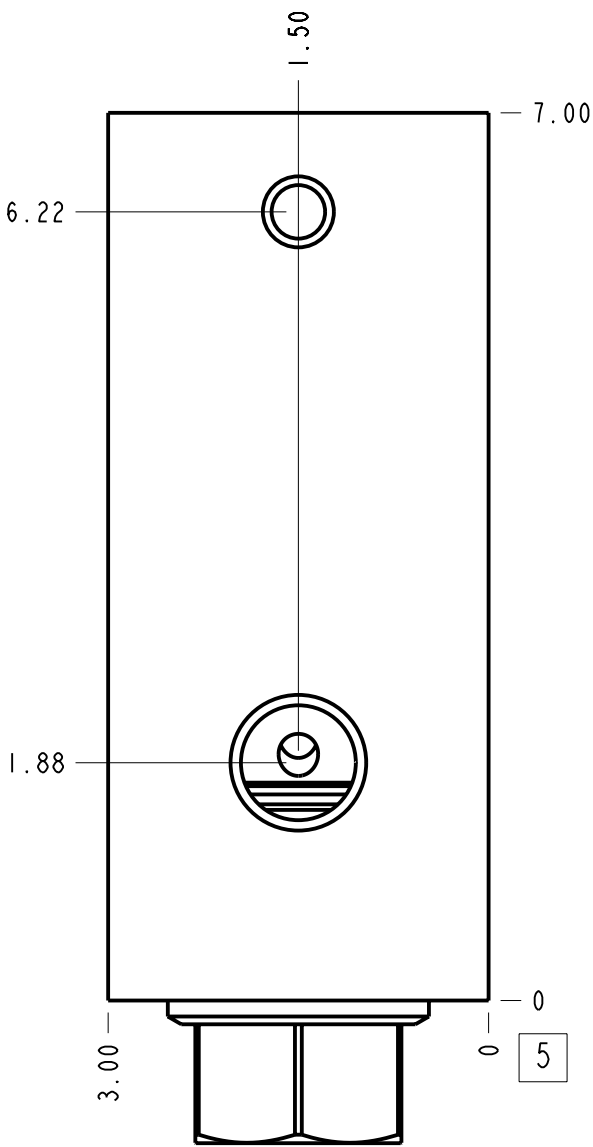
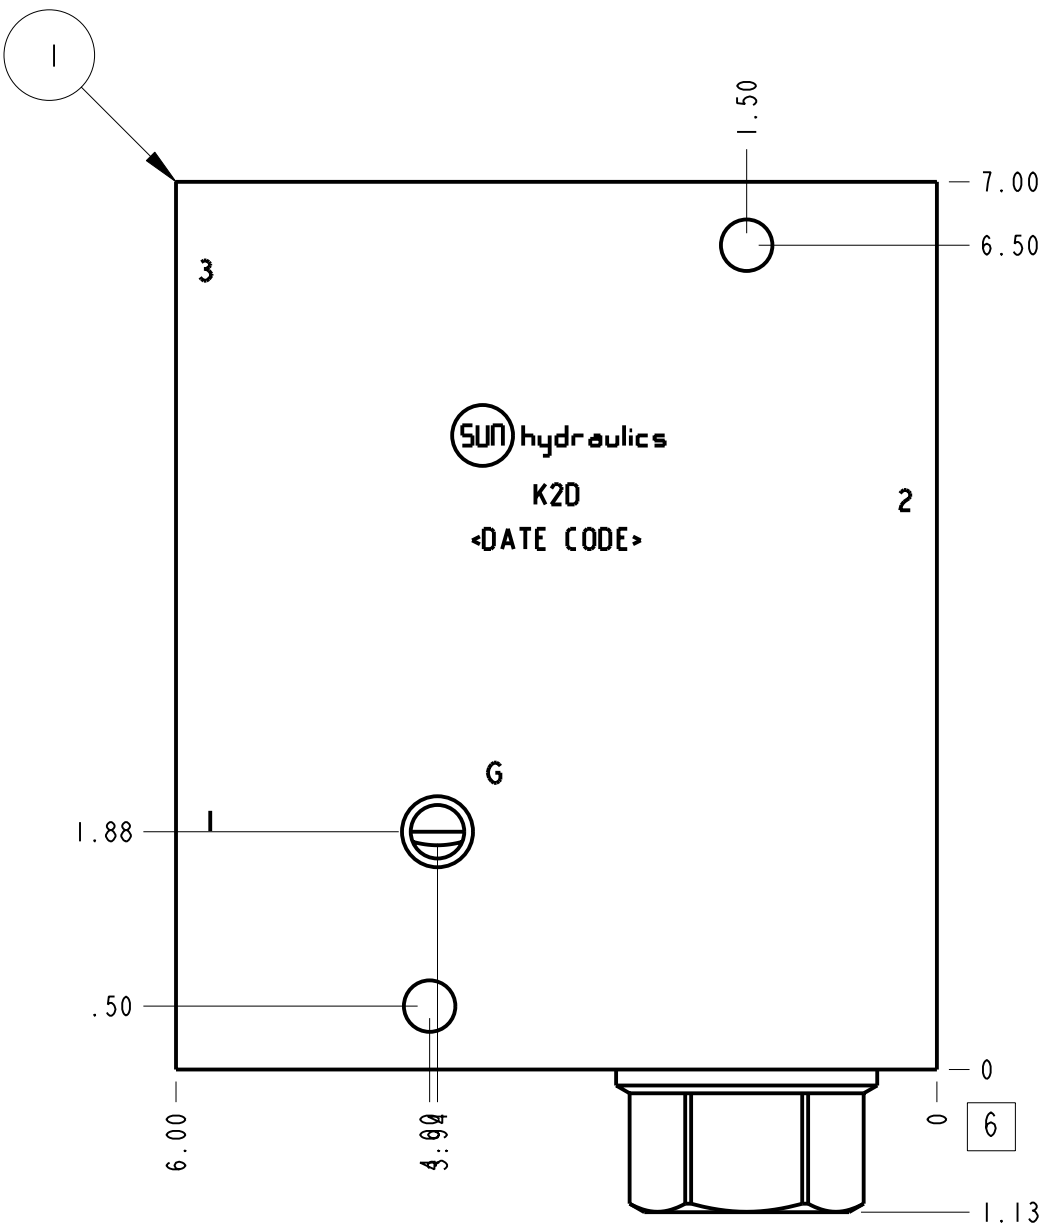
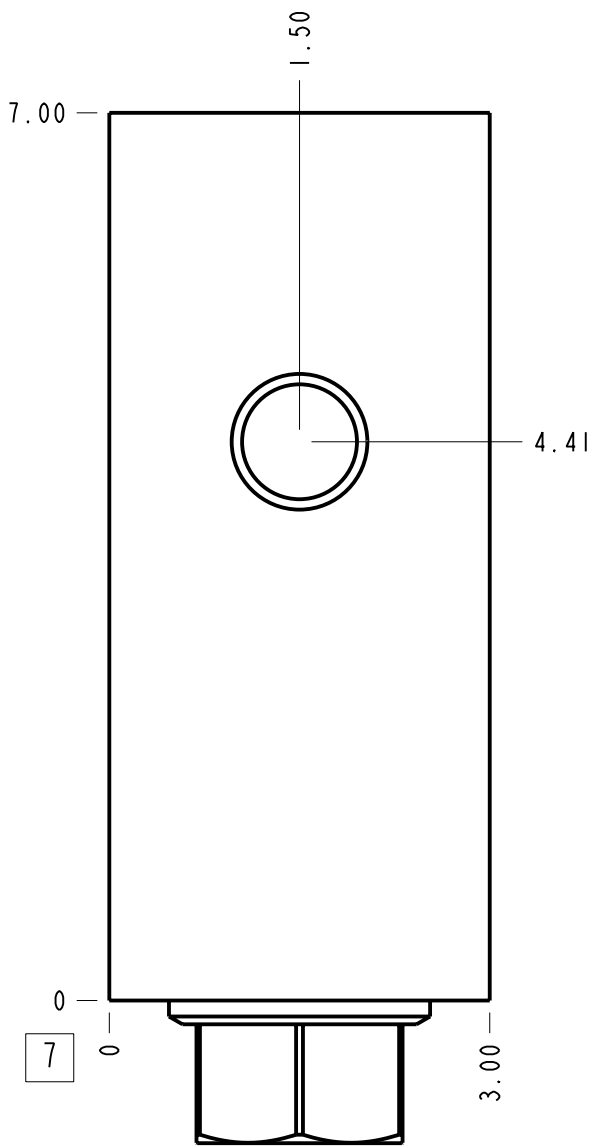
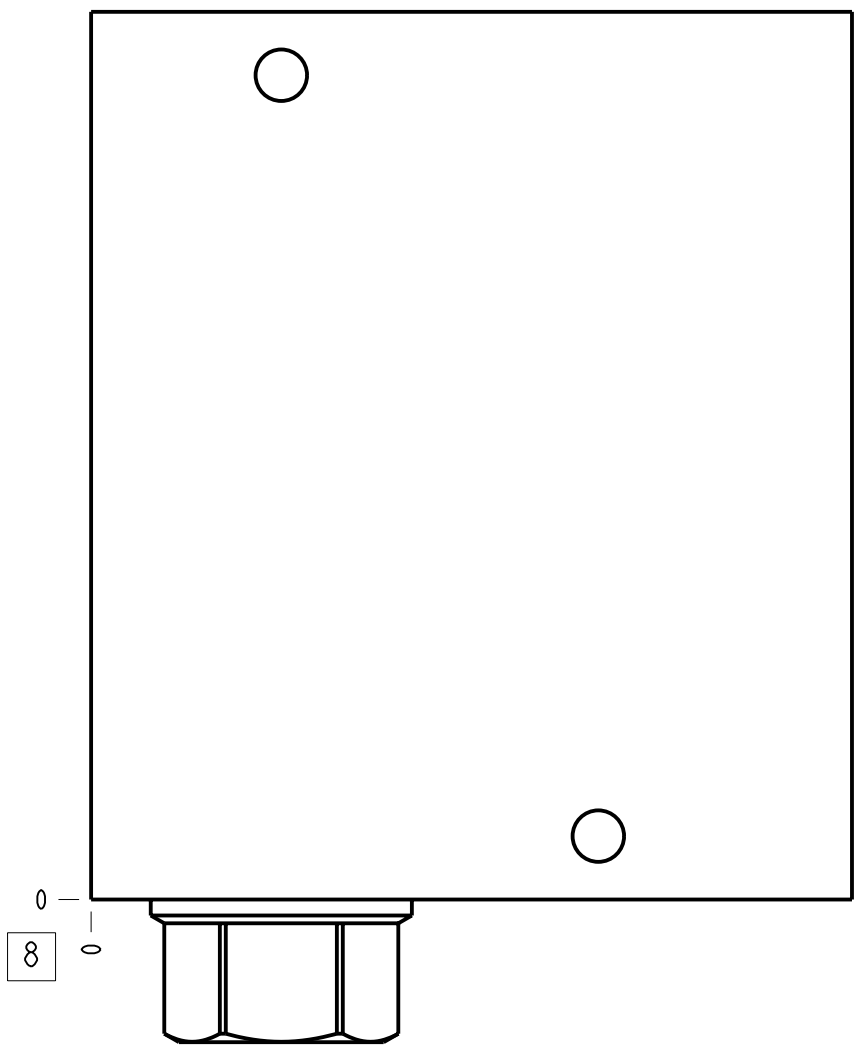


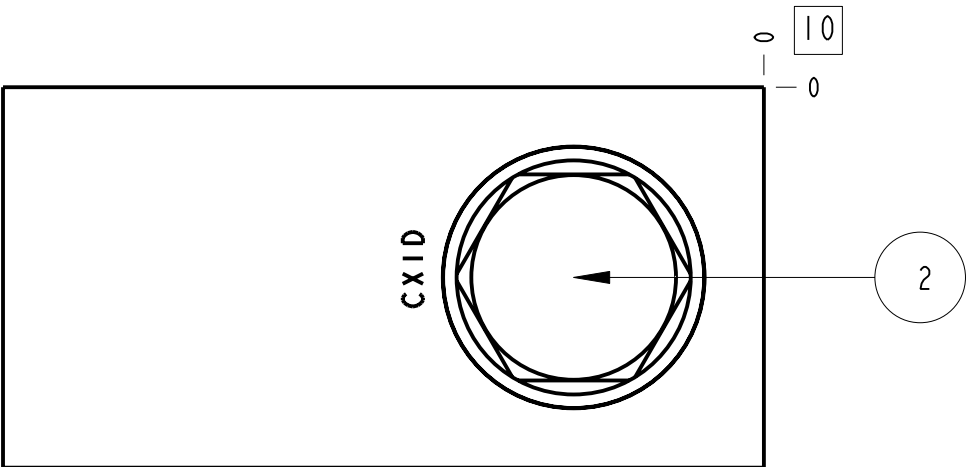

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
K2D	Ports 1 & 2	3/4" NPTF
K2D	Port 3	1/4" NPTF
K2D	Gage Port	1/4" NPTF

Technical Data	U.S. Units	Metric Units
Cavity	T-19A	
Body Features	Ninety degree with reverse flow check - reducing	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	11.752 lb.	5,331 kg.
Mounting Hole Diameter	.41 in.	10,4 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

2	CXID-XCN			CHECK VALVE	
1	151-923-001		6061-T6 ALUMINUM	BODY	
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	
MODEL K2D			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE  THIRD ANGLE 
DESCRIPTION T-19A Line mount (See Technical Data for Body Features)			DATE Oct-15-26	SCALE 0.660	DWG SIZE C SHEET 1
					