
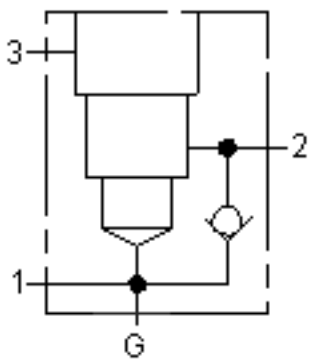
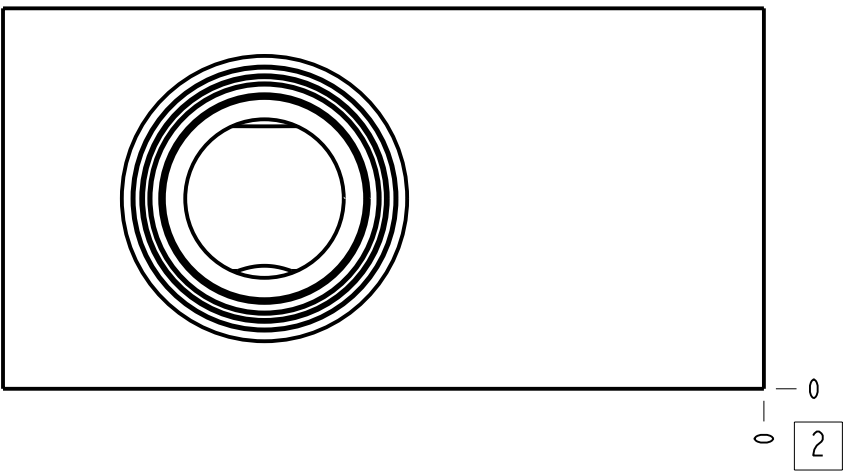
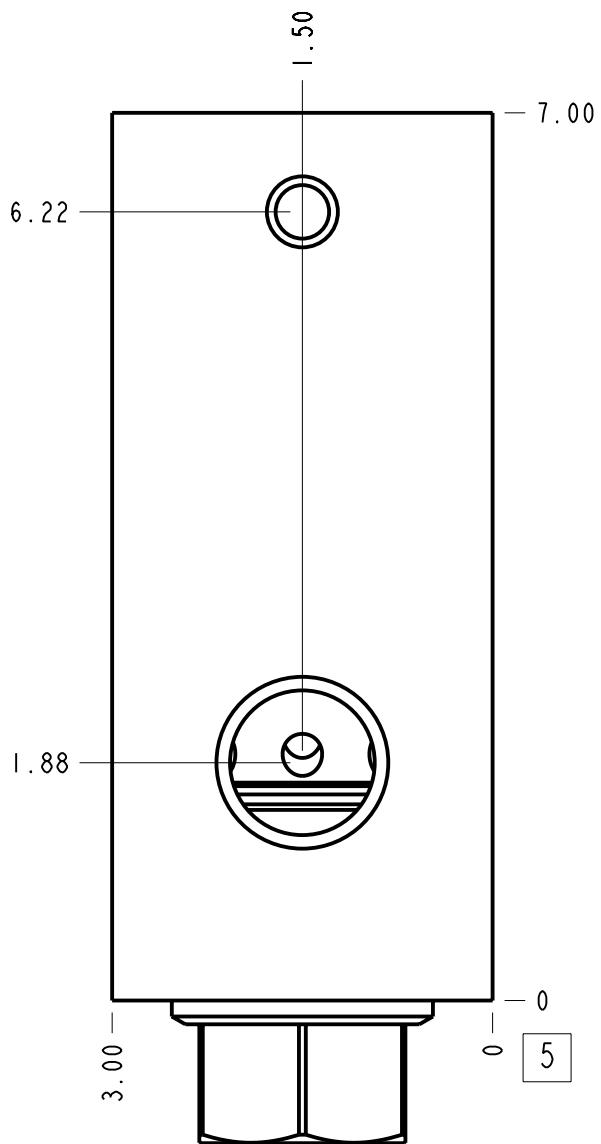
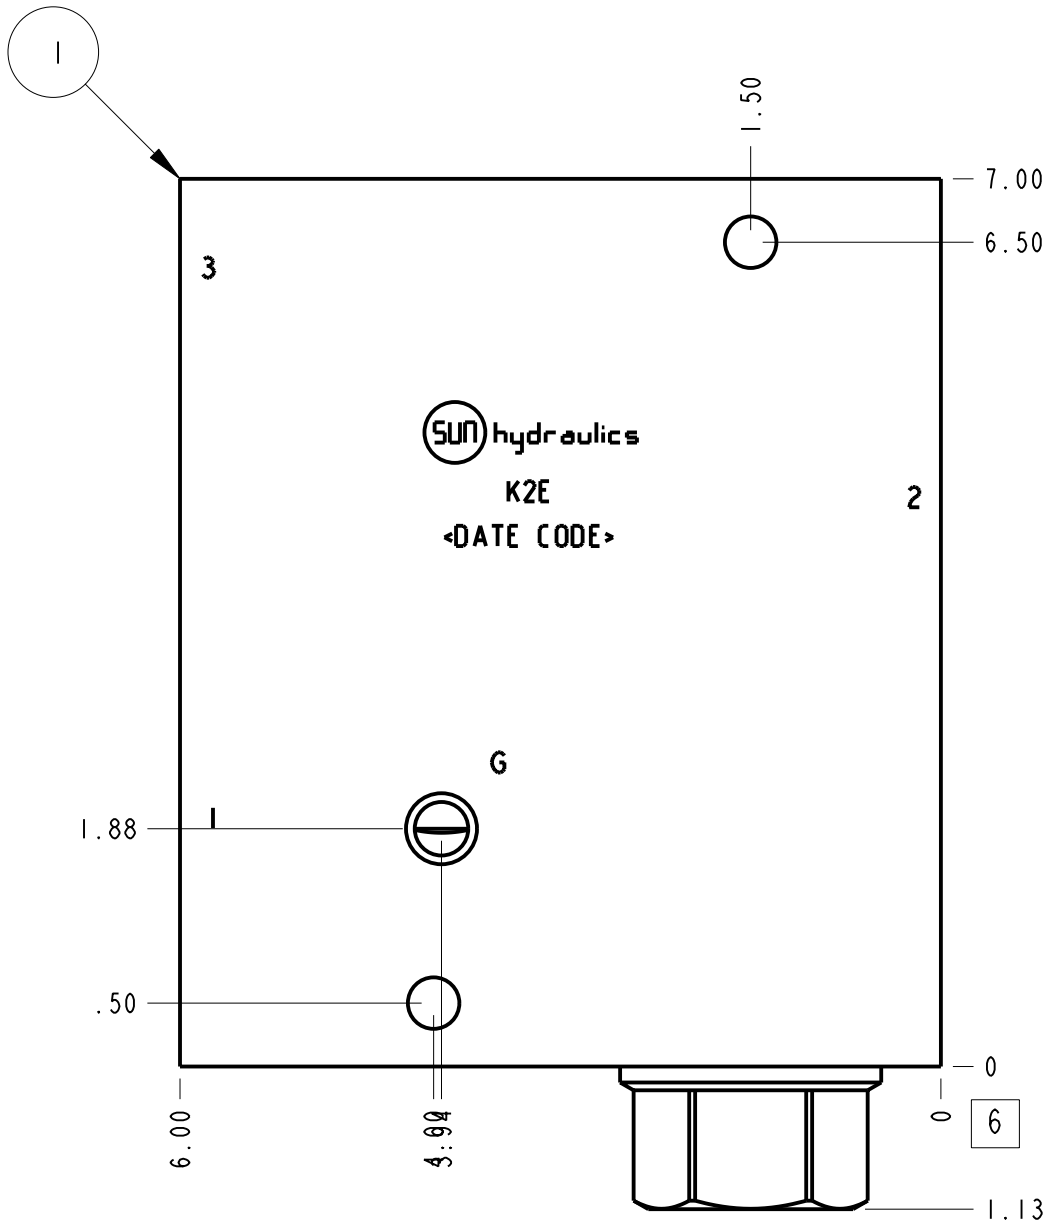
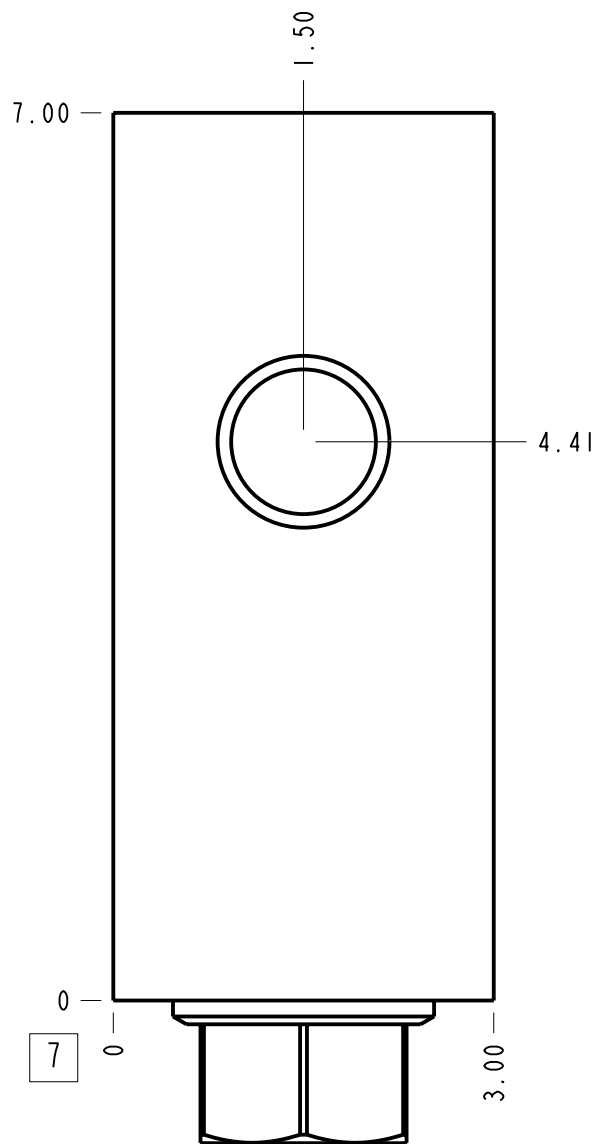
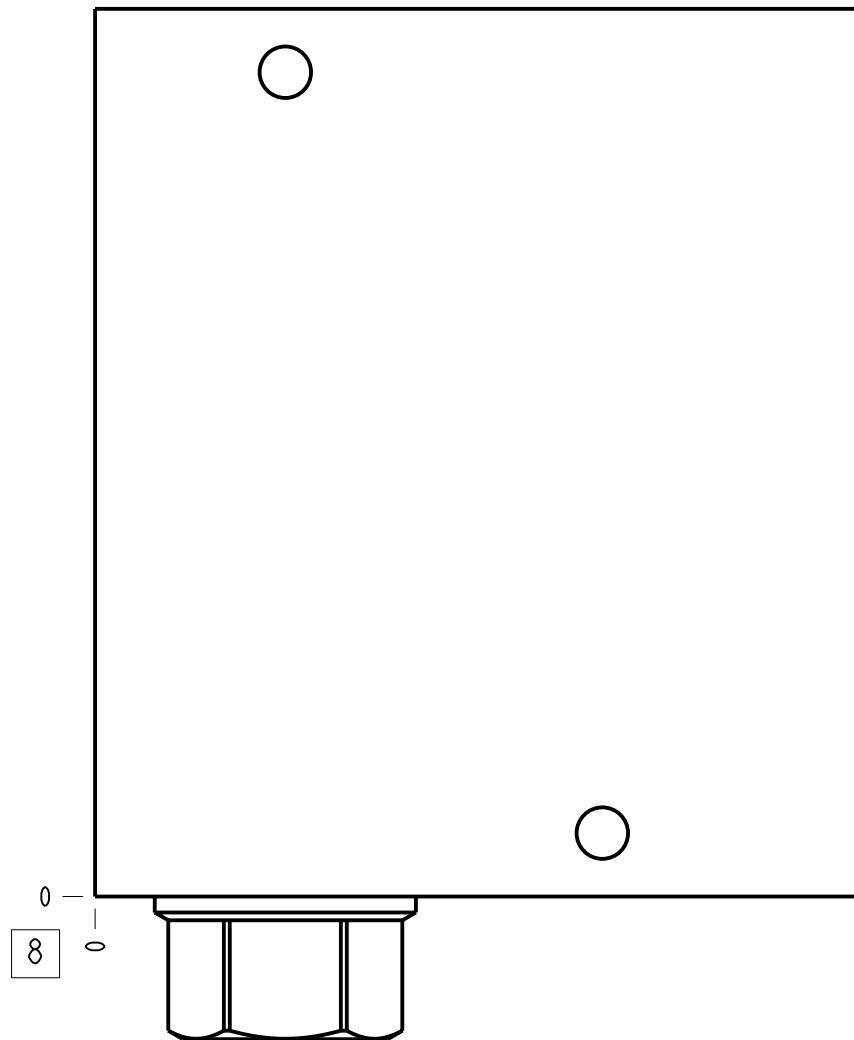


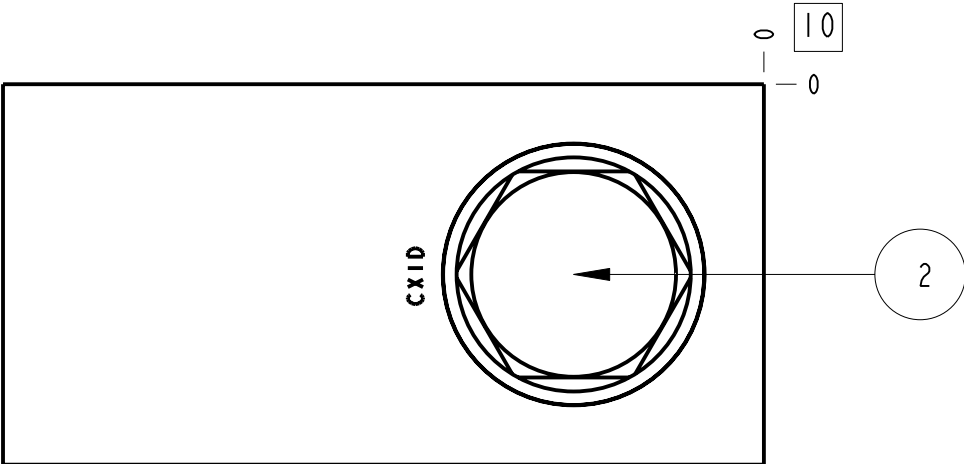

Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
K2E	Ports 1 & 2	1" NPTF
K2E	Port 3	1/4" NPTF
K2E	Gage Port	1/4" NPTF

Technical Data	U.S. Units	Metric Units
Cavity	T-19A	
Body Features	Ninety degree with reverse flow check - reducing	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	11.538 lb.	5,234 kg.
Mounting Hole Diameter	.41 in.	10,4 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

2	CX1D-XCN			CHECK VALVE						
1	151-923-002		6061-T6 ALUMINUM	BODY						
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY					
MODEL			K2E		ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE					
DESCRIPTION			T-19A Line mount (See Technical Data for Body Features)							
DATE		Oct-15-26	SCALE	0.660	DWG SIZE	SHEET	FIRST ANGLE		THIRD ANGLE	