

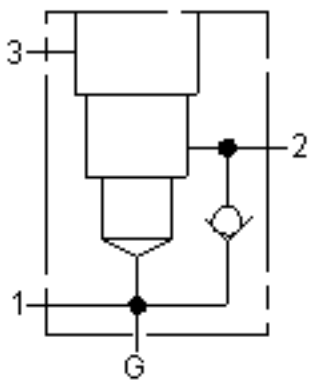
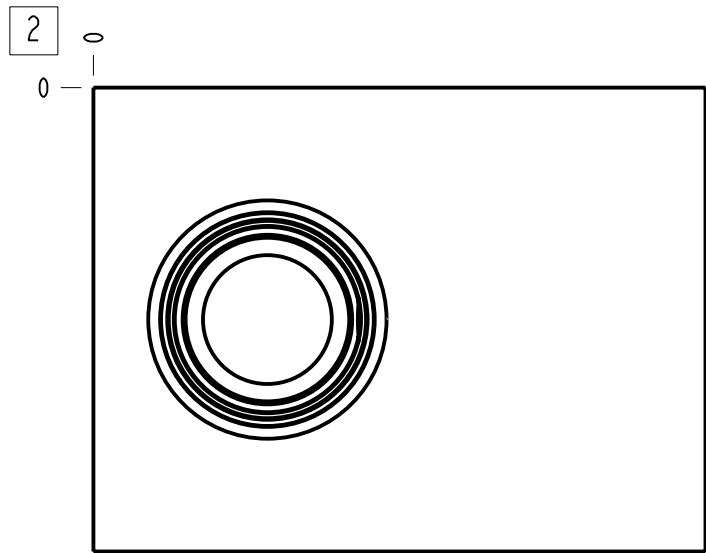
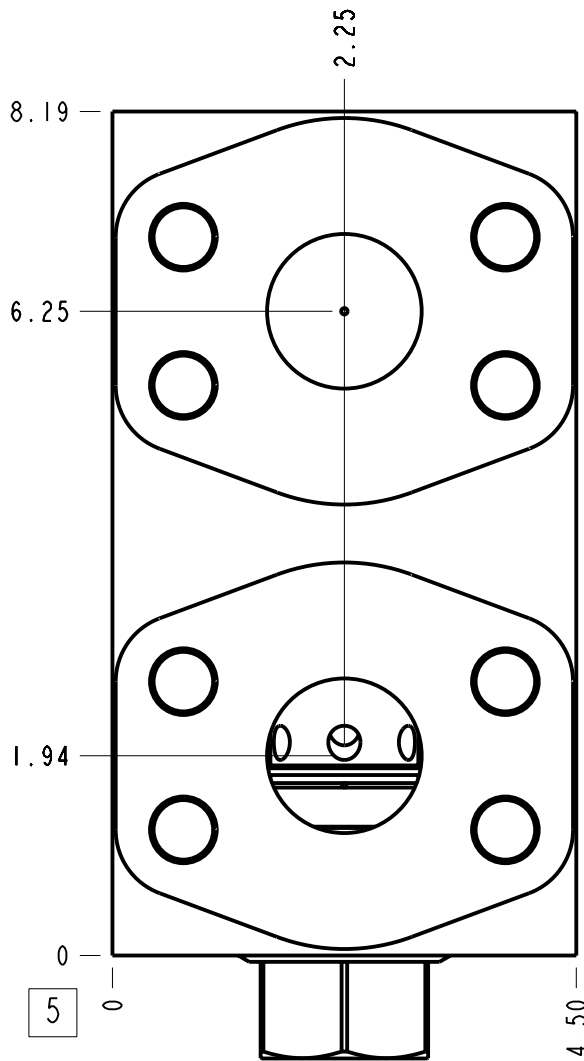
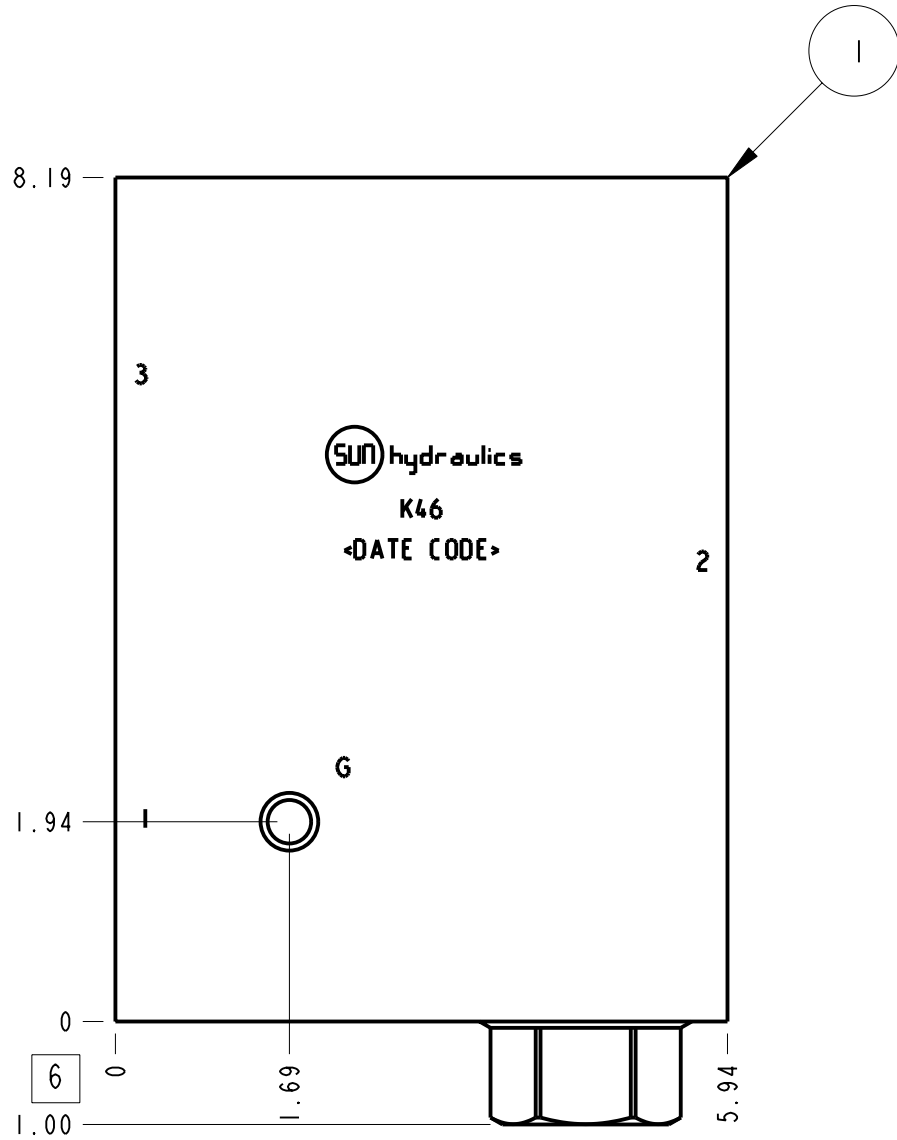


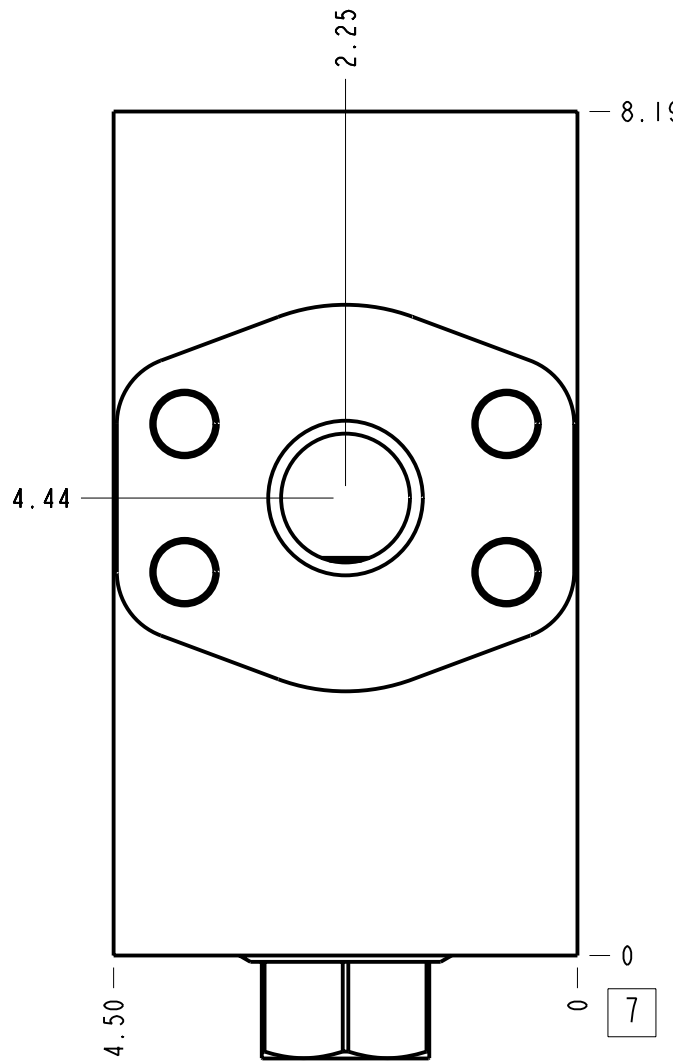


Technical Data	U.S. Units	Metric Units
Cavity	T-19A	
Body Features	Ninety degree with reverse flow check - reducing	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	19.112 lb.	8,669 kg.
Mounting Hole Thread	.375-16 UNC - 2B in.	
Mounting Hole Depth	.62 in.	15,7 mm
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

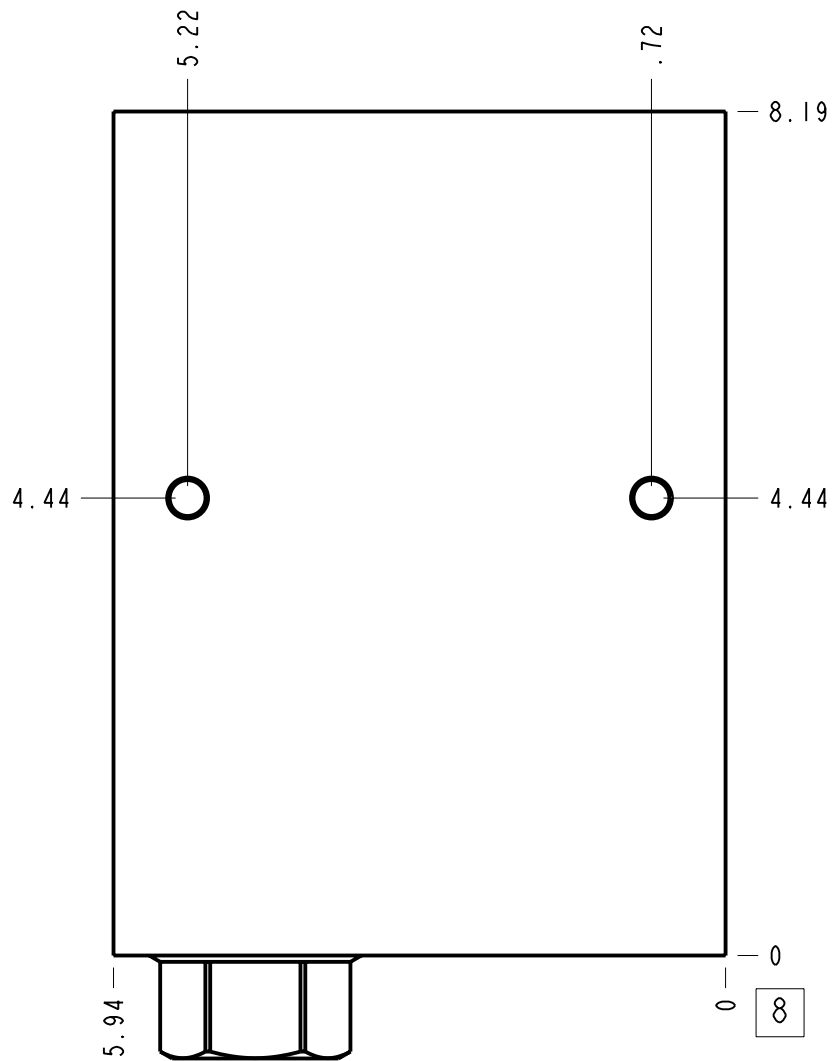

Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- 1 1/2" SAE Flange mounting hole data: Inch: 5/8-11 UNC x 1.38 (34,9 mm) DP,
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
K46	Ports 1, 2, 3	1 1/2" Code 62
K46	Gage Port	1/4" NPTF

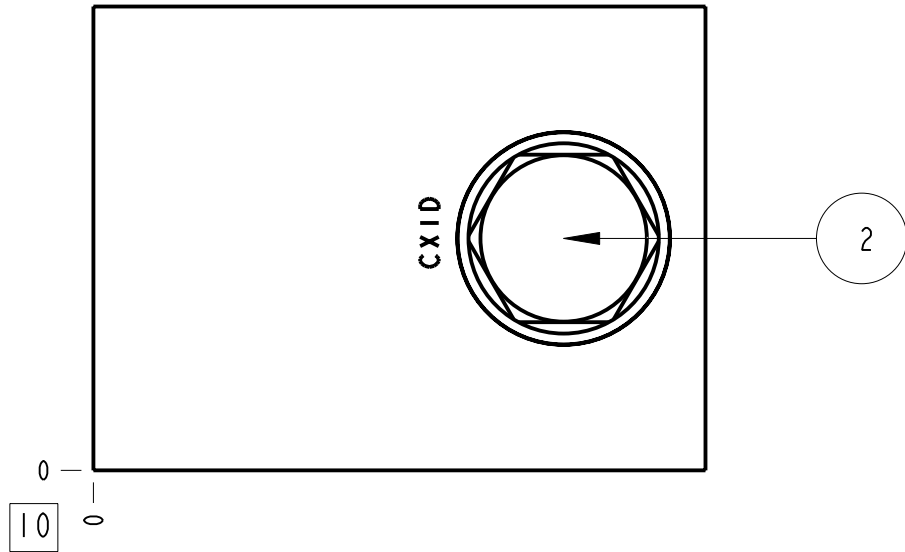

2	CXID-XCN		CHECK VALVE	1
1	151-936-001		6061-T6 ALUMINUM	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME
QTY				

MODEL	K46		ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE	THIRD ANGLE
DESCRIPTION	T-19A Line mount (See Technical Data for Body Features)		DATE	SCALE	DWG SIZE	SHEET
			Mar-06-25	0.537	C	1

