
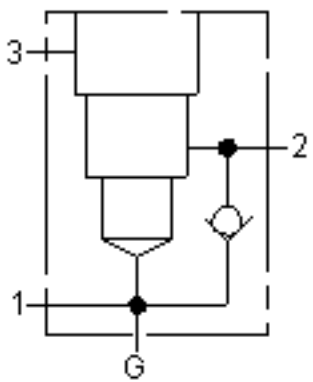
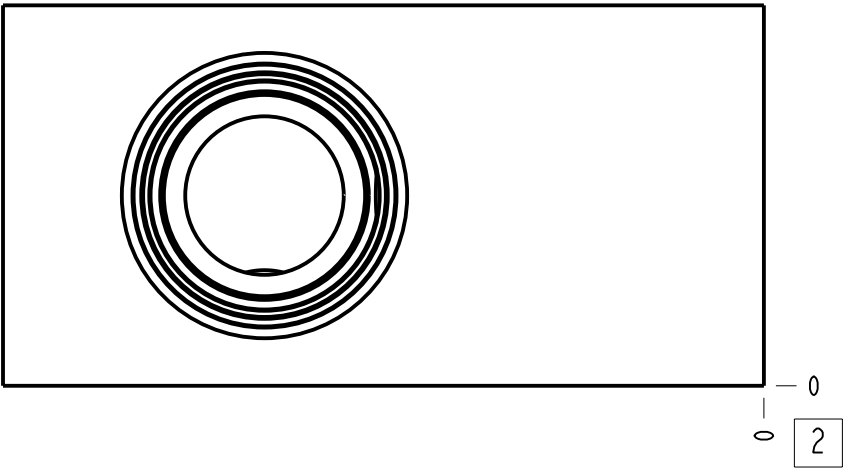
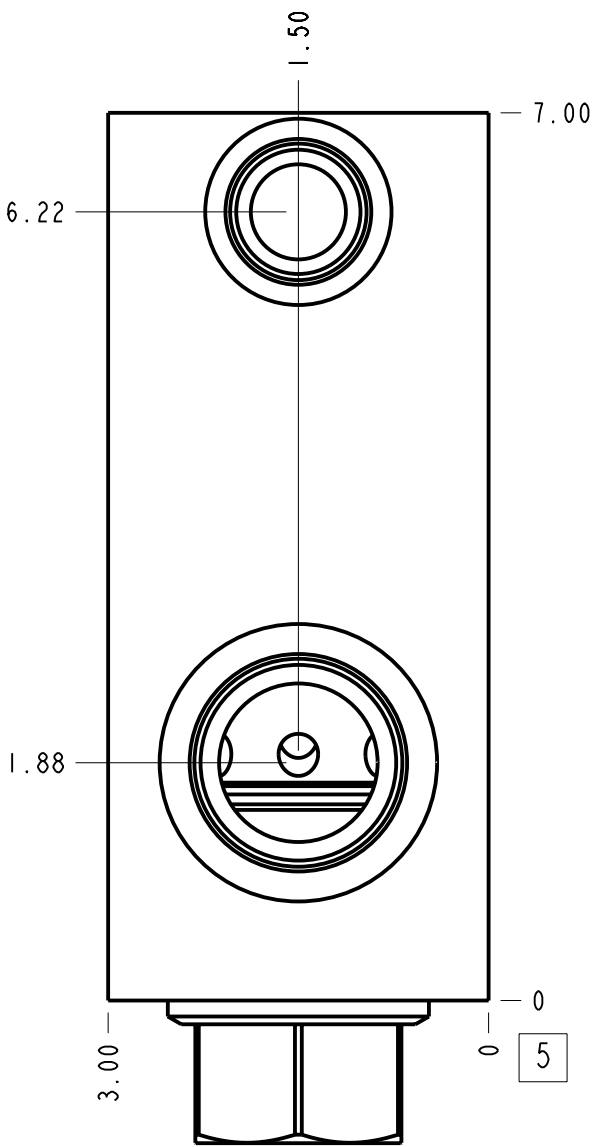
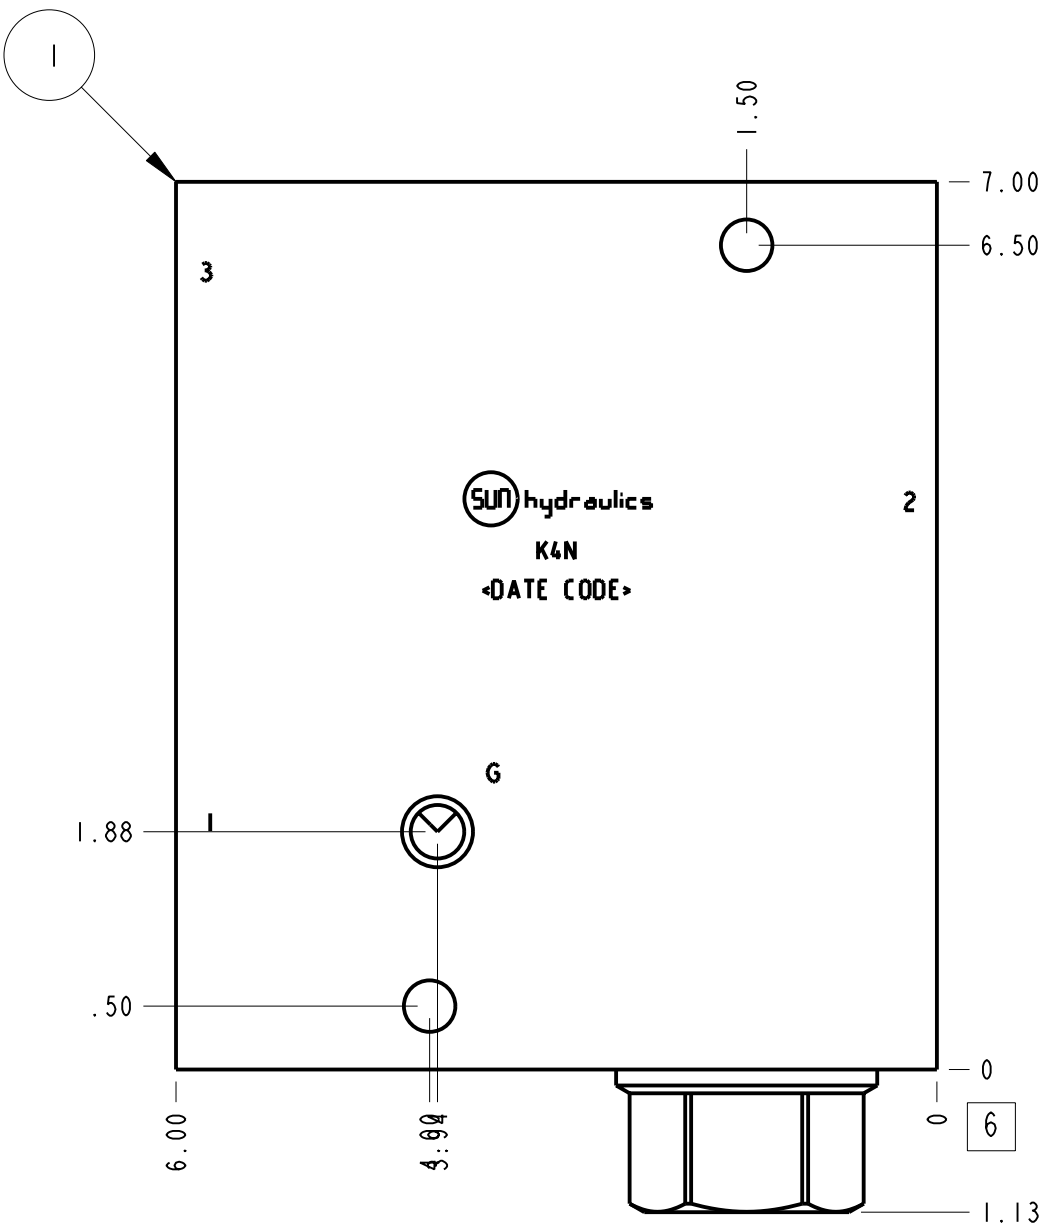
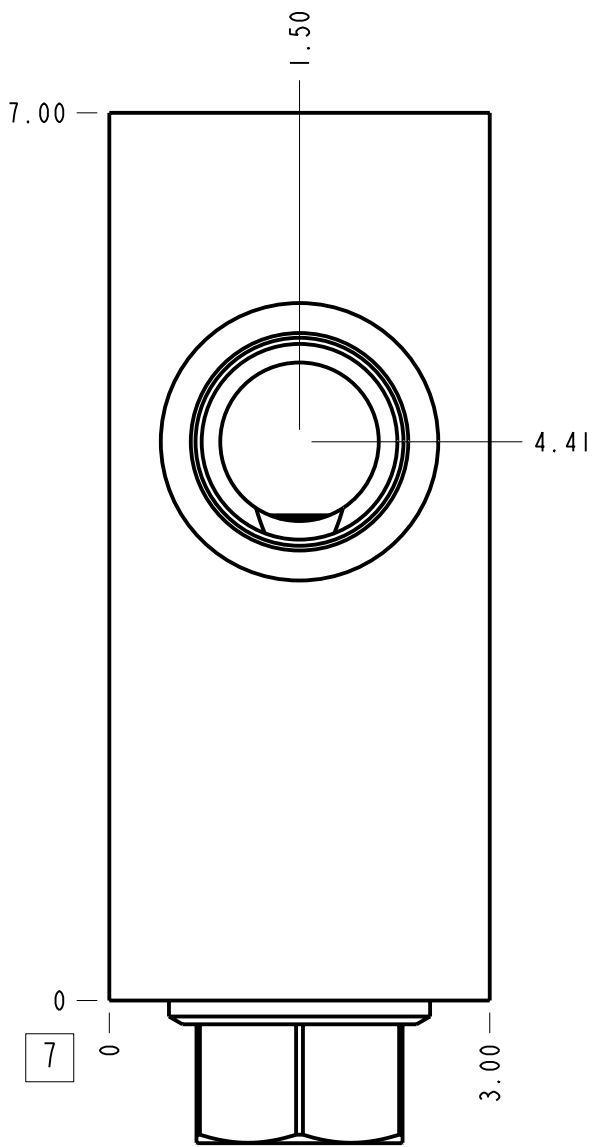


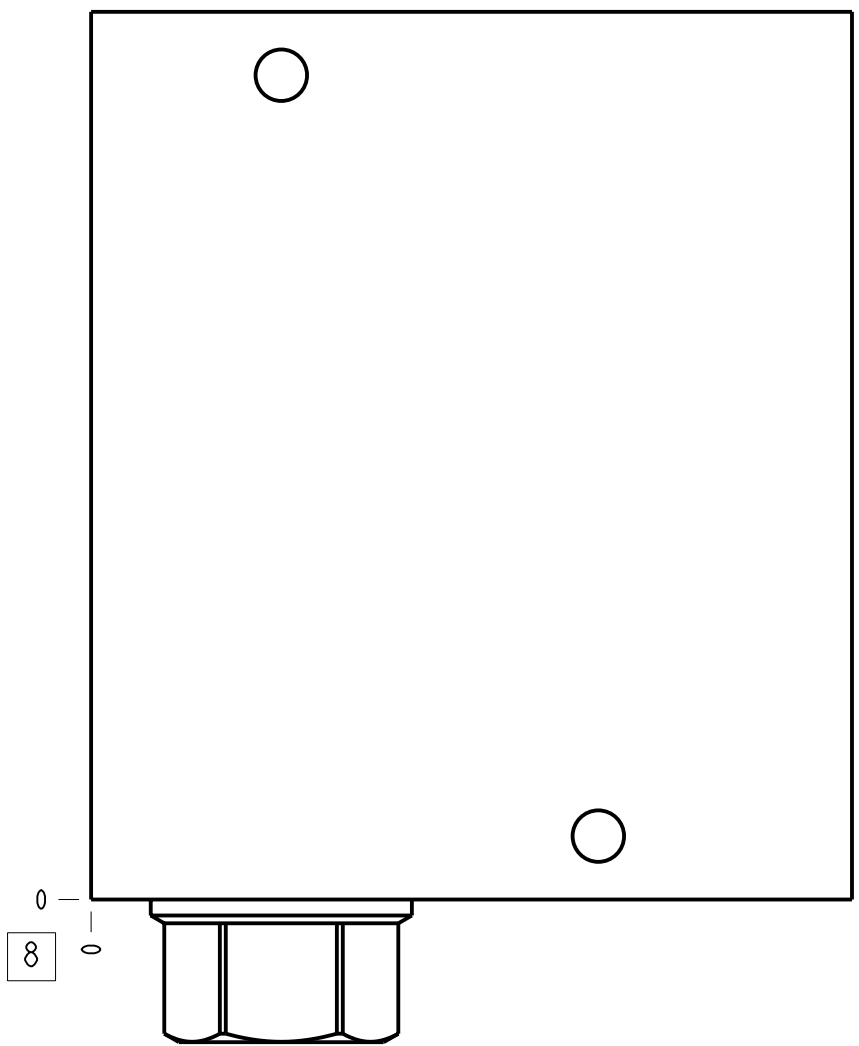


Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
K4N	Ports 1 & 2	SAE 20
K4N	Port 3	SAE 12
K4N	Gage Port	1/4" NPTF

Technical Data	U.S. Units	Metric Units
Cavity	T-19A	
Body Features	Ninety degree with reverse flow check - reducing	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	11.222 lb.	5,090 kg.
Mounting Hole Diameter	.41 in.	10,4 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

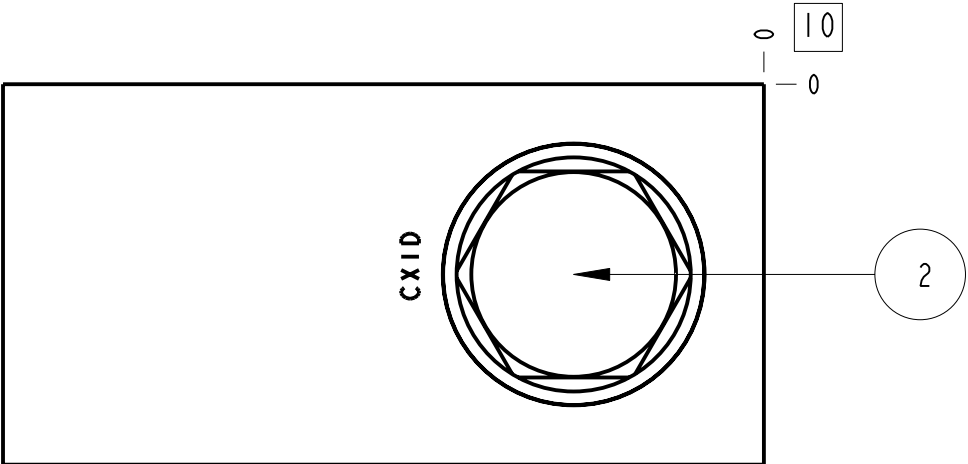

2	CXID-XCN			CHECK VALVE	
1	151-924-006		6061-T6 ALUMINUM	BODY	
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	
MODEL K4N			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE  THIRD ANGLE 
DESCRIPTION T-19A Line mount (See Technical Data for Body Features)			DATE Mar-24-25	SCALE 0.660	DWG SIZE C SHEET 1
					

