


CONFIGURATION

X Control	Not Adjustable
H Differential Pressure	200 psi (14 bar)
N Seal Material	Buna-N

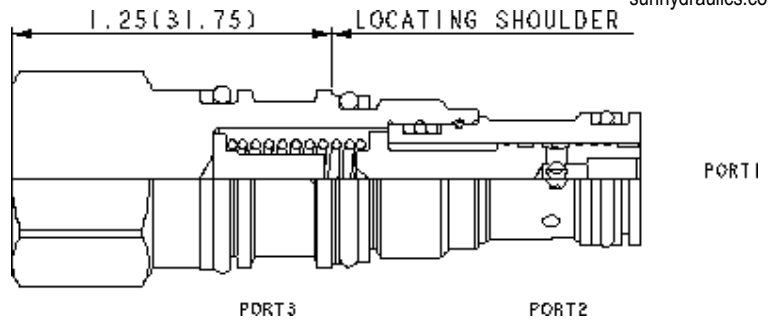

Normally open modulating elements without an internal orifice act as a restrictive compensator to maintain a constant pressure drop across an orifice, regardless of variations in upstream or downstream pressure.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-163A
Series	0
Capacity	7.5 gpm
Maximum Operating Pressure	5000 psi
Valve Hex Size	3/4 in.
Valve Installation Torque	20 - 25 lbf ft
Seal kit - Cartridge	Buna: 990163007
Seal kit - Cartridge	Polyurethane: 990163002
Seal kit - Cartridge	Viton: 990163006
Model Weight	0.20 lb.

CONFIGURATION OPTIONS

Model Code Example: LPBCXHN

CONTROL	(X)	DIFFERENTIAL PRESSURE	(H)	SEAL MATERIAL	(N)
X Not Adjustable		H 200 psi (14 bar)		N Buna-N	
L Tuning Adjustment		D 50 psi (3,5 bar)		V Viton	
		F 100 psi (7 bar)			

TECHNICAL FEATURES

- A tuning adjustment (models configured with an L control) is available to vary the pressure drop across the compensator to increase/decrease flow within +/-25% of setting.
- All ports will accept 5000 psi (350 bar).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

