



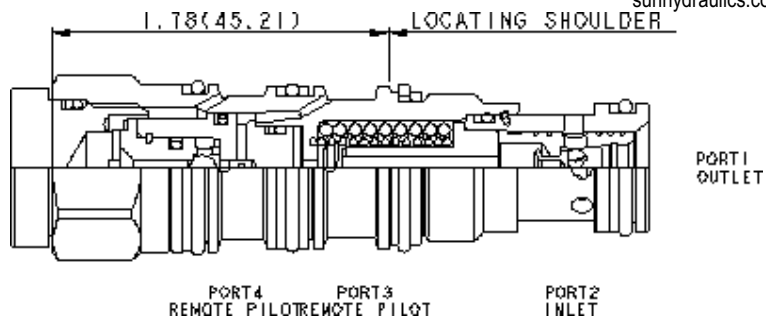

CONFIGURATION

X Control	Not Adjustable
H Differential Pressure	200 psi (14 bar)
N Seal Material	Buna-N

A normally open modulating element, used as a restrictive compensator, ensures a constant pressure drop across an external orifice to create a pressure compensated flow control. The resulting flow remains constant regardless of variations in upstream or downstream pressure.

A ball shuttle connects the after orifice signal from the higher of port 3 or 4 to the pilot area.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-21A
Series	1
Capacity	15 gpm
Maximum Operating Pressure	5000 psi
Nominal Compensating Pressure	200 psi
Valve Hex Size	7/8 in.
Valve Installation Torque	30 - 35 lbf ft
Seal kit - Cartridge	Buna: 990021007
Seal kit - Cartridge	Polyurethane: 990021002
Seal kit - Cartridge	Viton: 990021006
Model Weight	0.37 lb.

CONFIGURATION OPTIONS

Model Code Example: LPDSXHN

CONTROL	(X)	DIFFERENTIAL PRESSURE	(H)	SEAL MATERIAL	(N)
X Not Adjustable		H 200 psi (14 bar)		N Buna-N	
				V Viton	

TECHNICAL FEATURES

- The shuttle features hardened steel balls and seats for excellent wear characteristics and contamination tolerance.
- The single ball shuttle allows for the decay of the pressure signal when both load ports drop to a lower pressure.
- All ports will accept 5000 psi (350 bar).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

