



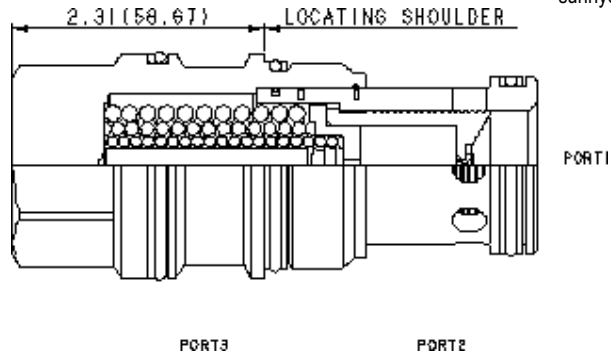

CONFIGURATION

X	Control	Not Adjustable
H	Differential Pressure	200 psi (14 bar)
N	Seal Material	Buna-N
(none) Material/Coating		

Normally closed modulating elements with an internal orifice between port 1 and port 3 can be used as a main-stage relief valve. The valve can be controlled remotely using a pilot relief or pilot solenoid valve.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-19A
Series	4
Capacity	120 gpm
Maximum Operating Pressure	5000 psi
Control Pilot Flow	15 - 30 in ³ /min.
Control Orifice Diameter	.021 in.
Valve Hex Size	1 5/8 in.
Valve Installation Torque	350 - 375 lbf ft
Seal kit - Cartridge	Buna: 990019007
Seal kit - Cartridge	Polyurethane: 990019002
Seal kit - Cartridge	Viton: 990019006
Model Weight	2.55 lb.

CONFIGURATION OPTIONS

Model Code Example: LRJAXHN

CONTROL	(X)	DIFFERENTIAL PRESSURE	(H)	SEAL MATERIAL	(N)	MATERIAL/COATING
X Not Adjustable		H 200 psi (14 bar)		N Buna-N		Standard Material/Coating
		A 12 psi		V Viton		/AP Stainless Steel, Passivated
		B 20 psi (1,5 bar)				
		C 30 psi (2 bar)				
		D 50 psi (3,5 bar)				

TECHNICAL FEATURES

- A tuning adjustment (models configured with an L control) is available to vary the pressure drop across the compensator to increase/decrease flow within +/-25% of setting.
- All ports will accept 5000 psi (350 bar).
- Corrosion resistant cartridge valves are intended for use in corrosive environments and are identified by the model code suffix /AP for external stainless steel components, or /LH for external zinc-nickel plated components. See the CONFIGURATION section for all options. For further details, please see the Materials of Construction page located under TECH RESOURCES.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

RELATED MODELS

- [LRJA8](#) Normally closed, modulating element with integral T-8A control cavity and pilot source from port 1
- [LRJAL](#) Tuneable, normally closed, modulating element with pilot source from port 1

