






Technical Data	U.S. Units	Metric Units
Cavity	T-22A	
Body Features	Ninety degree with reverse flow check - reducing	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	2.318 lb.	1,052 kg.
Mounting Hole Diameter	.41 in.	10,4 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

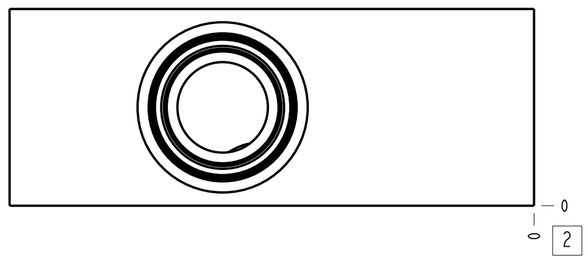

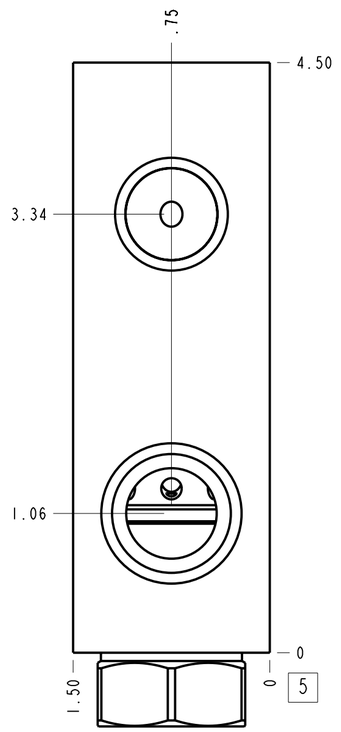

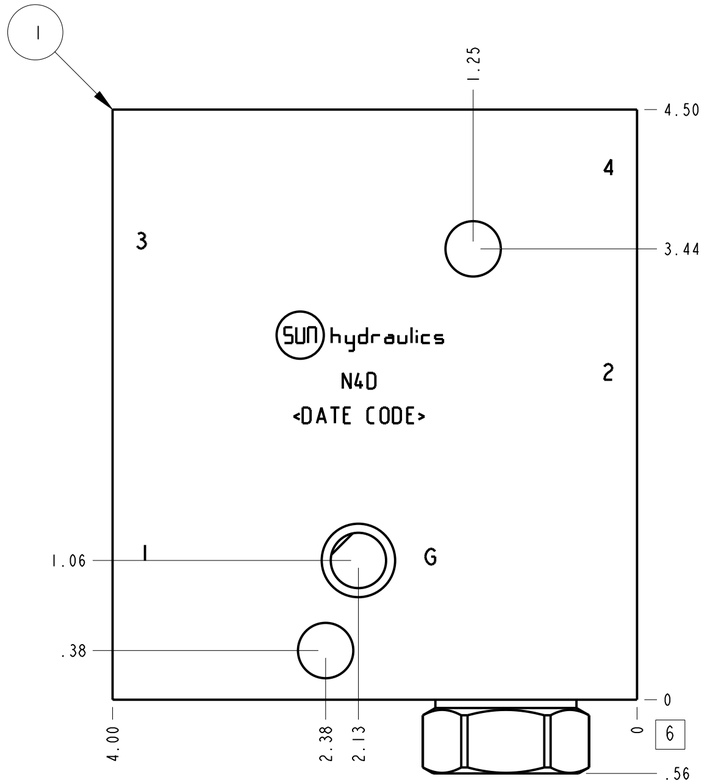


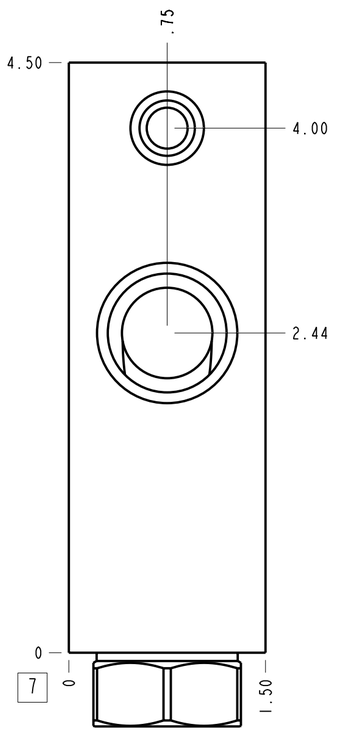

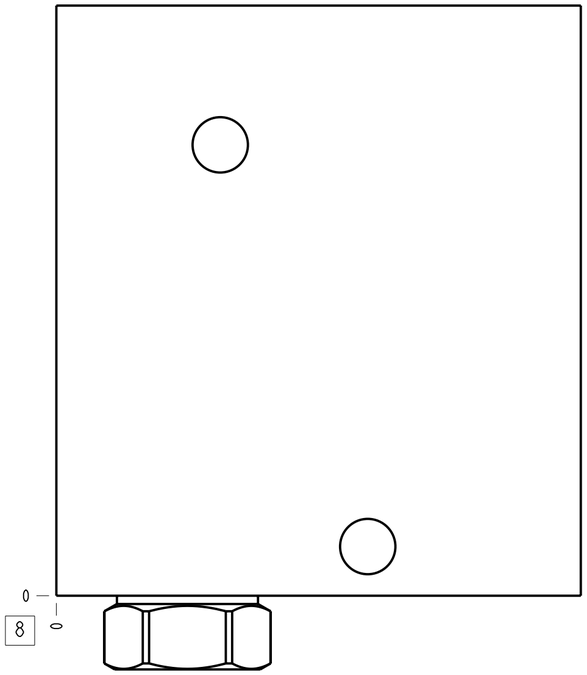

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

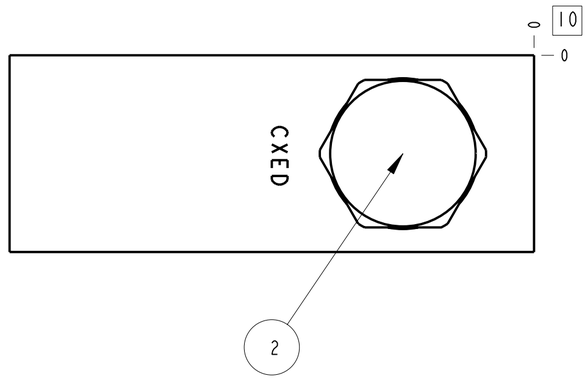

Port Headings		
Product	Port	Size
N4D	Ports 1 & 2	3/4" NPTF
N4D	Port 3	1/2" NPTF
N4D	Port 4	1/4" NPTF
N4D	Gage Port	1/4" NPTF

ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
2	CXED-XCN			CHECK VALVE	1
1	151-916-004		6061-T6 ALUMINUM	BODY	1

MODEL: N4D			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE	FIRST ANGLE / THIRD ANGLE	
DESCRIPTION: T-22A Line mount (See Technical Data for Body Features)	DATE: Jul-06-26	SCALE: 1.120	DWG SIZE: C	SHEET: 1	sun hydraulics