



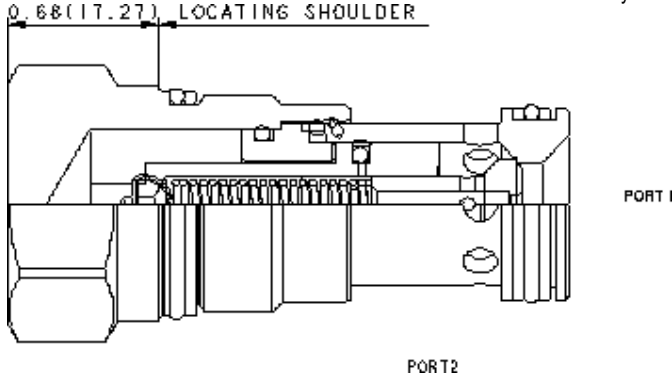

CONFIGURATION

X	Control	Not Adjustable
A	Adjustment Range	-
N	Seal Material	Buna-N
(none)	Material/Coating	

Air-bleed and start-up cartridges are used to purge air trapped in the system to help reduce power requirements and facilitate pump priming during the start-up of blocked center circuits.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-3A
Series	2
Capacity	4 - 50 gpm
Maximum Operating Pressure	5000 psi
Valve Hex Size	1 1/8 in.
Valve Installation Torque	45 - 50 lbf ft
Seal kit - Cartridge	Buna: 990203007
Seal kit - Cartridge	Polyurethane: 990003002
Seal kit - Cartridge	Viton: 990203006
Model Weight	0.39 lb.

CONFIGURATION OPTIONS

Model Code Example: NQEBXAN

CONTROL	(X)	ADJUSTMENT RANGE	(A)	SEAL MATERIAL	(N)	MATERIAL/COATING
X Not Adjustable		A -		N Buna-N E EPDM V Viton		Standard Material/Coating /AP Stainless Steel, Passivated /LH Mild Steel, Zinc-Nickel

TECHNICAL FEATURES

- Air-bleed and start-up valves require a minimum of 4 gpm (15 L/min.) flow rate and 80 psi (5,5 bar) system pressure.
- The valve will re-open when system pressure falls below 25 psi (1,7 bar)
- After air has been purged, closing times vary from approximately 12 seconds at 4 gpm (15 L/min.) to 0.5 seconds at 50 gpm 200 L/min.).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

