MODEL
PSDB

Direct-acting, pressure reducing/relieving valve with drain to port 4
SERIES 1 / CAPACITY: 10 gpm / CAVITY: T-21A

sunhydraulics.com/model/PSDB



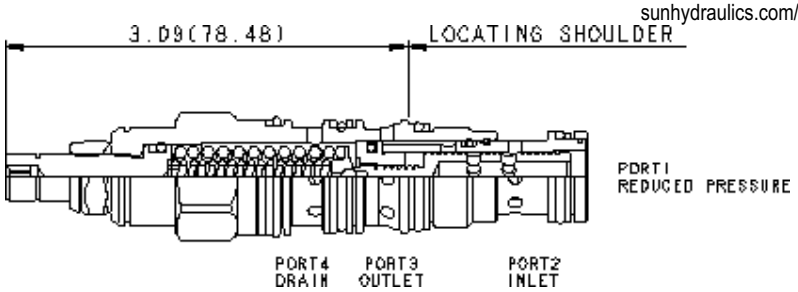

CONFIGURATION

L	Control	Standard Screw Adjustment
A	Adjustment Range	500 - 3000 psi (35 - 210 bar), 700 psi (50 bar) Standard Setting
N	Seal Material	Buna-N
(none)	Material/Coating	

Direct-acting, pressure reducing/relieving valves reduce a high primary pressure at the inlet (port 2) to a constant reduced pressure at port 1, with a full-flow relief function from port 1 to tank (port 3). Draining port 4 makes the valve insensitive to pressure at port 3. These valves incorporate a damped construction for stable operation allowing the use of high reduced pressure.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-21A
Series	1
Capacity	10 gpm
Maximum Operating Pressure	5000 psi
Factory Pressure Settings Established at	0.25 gpm
Maximum Valve Leakage at 110 SUS (24 cSt)	2 in³/min.@1000 psi
Adjustment - No. of CW Turns from Min. to Max. setting	5
Valve Hex Size	7/8 in.
Valve Installation Torque	30 - 35 lbf ft
Adjustment Screw Internal Hex Size	5/32 in.
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990021007
Seal kit - Cartridge	Polyurethane: 990021002
Seal kit - Cartridge	Viton: 990021006
Model Weight	0.41 lb.

NOTES

For Series 1 cartridges configured with an O control (panel mount handknob), a .75 in. (19 mm) diameter hole is required in the panel.

CONFIGURATION OPTIONS

Model Code Example: PSDBLAN

CONTROL (L)

- **L** Standard Screw Adjustment
- **C** Tamper Resistant - Factory Set
- **K** Handknob
- **O** Handknob with Panel Mount

ADJUSTMENT RANGE (A)

- **A** 500 - 3000 psi (35 - 210 bar), 700 psi (50 bar) Standard Setting
- **B** 50 - 1500 psi (3,5 - 105 bar), 200 psi (14 bar) Standard Setting
- **D** 25 - 800 psi (1,7 - 55 bar), 200 psi (14 bar) Standard Setting
- **E** 25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting
- **S** 25 - 200 psi (1,7 - 14 bar), 100 psi (7 bar) Standard Setting
- **W** 750 - 4500 psi (50 - 315 bar), 1000 psi (70 bar) Standard Setting

SEAL MATERIAL (N)

- **N** Buna-N
- **V** Viton

MATERIAL/COATING

- Standard Material/Coating
- **/LH** Mild Steel, Zinc-Nickel

© 2025 Sun Hydraulics

TECHNICAL FEATURES

- Maximum pressure at port 3 should be limited to 3000 psi (210 bar).
- All spring ranges are tested for correct operation with 5000 psi (350 bar) inlet pressure.
- Suitable for accumulator circuits since the absence of pilot control flow results in reduced secondary circuit leakage.
- Direct acting concept provides highly reliable operation in contaminated systems, especially at dead headed conditions.
- Unlike pilot operated versions, direct acting valves exhibit a transitional step between reducing and relieving modes. This step equals 5% of the high end of the adjustment range, independent of the valve setting. Therefore, these valves may not be suitable for counterbalancing applications.
- Direct operated version offers superior dynamic response compared to equivalent pilot operated models.
- Pressure on the drain (port 4) is directly additive to the valve setting at a 1:1 ratio and should not exceed 5000 psi (350 bar).
- Leakage specified in Technical Data is out of port 3 with a supply pressure of 2000 psi (140 bar) and the valve set at mid range. This leakage is directly proportional to pressure differential and inversely proportional to viscosity expressed in centistokes.
- Full reverse flow from reduced pressure (port 1) to inlet (port 2) may cause the main spool to close. If reverse free flow is required in the circuit, consider adding a separate check valve to the circuit.
- By controlling the pressure at the drain (port 4), the effective setting of the valve can be increased over the nominal valve setting.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.
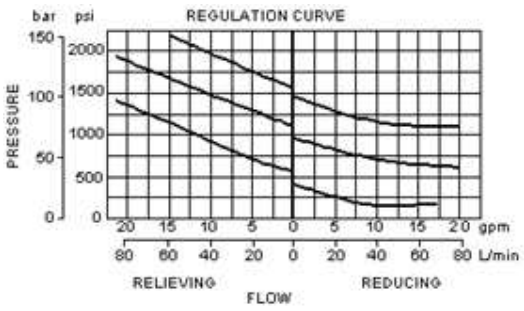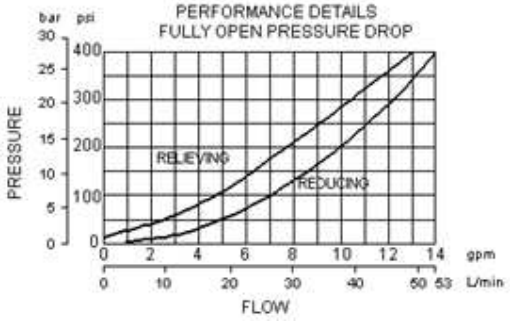
PERFORMANCE CURVES