


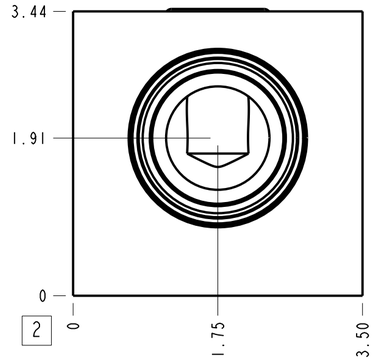




| Technical Data | U.S. Units | Metric Units |
|---|---|---|
| Cavity | T-24A | |
| Body Features | Direct mount | |
| Body Type | Line mount | |
| Interface | 0.75 SAE C62 | |
| Open Cavity Quantity | 1 | |
| Weight | 6.364 lb. | 2,887 kg. |
| Mounting Hole Diameter | .41 in. | |
| Mounting Hole Thread | .375-16 UNC - 2B in. | |
| Mounting Hole Depth | .94 in. | 24 mm |

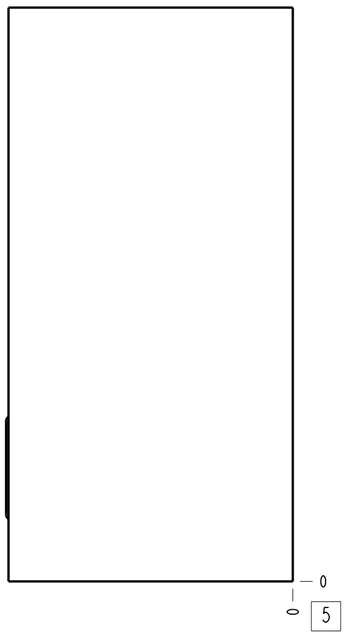

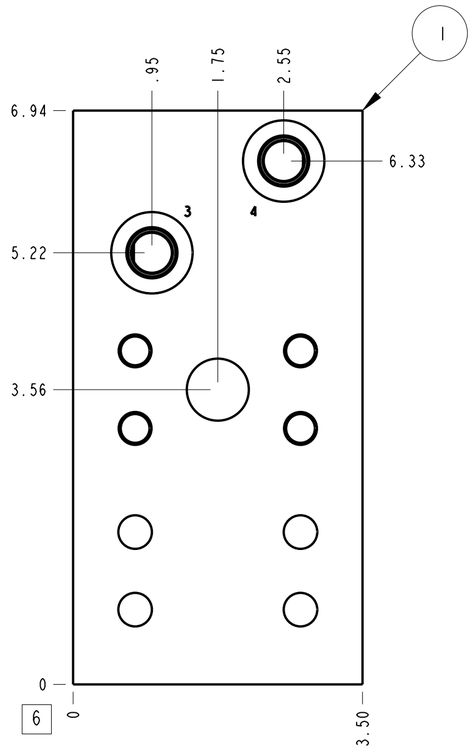


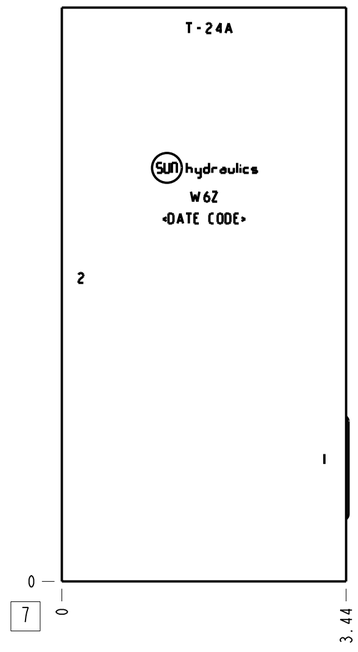

Notes

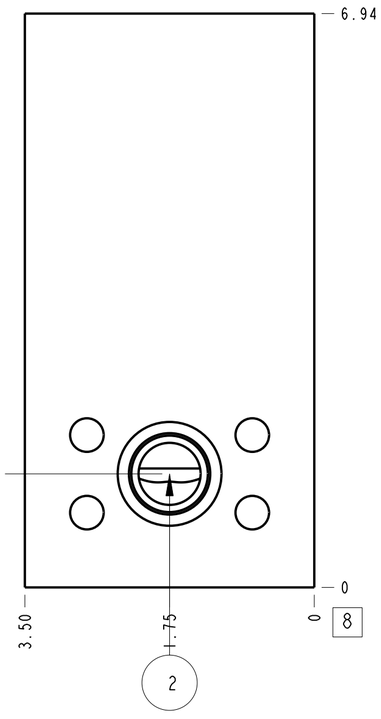1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

| Port Headings | | |
|---|---|---|
| Product | Port | Size |
| W6Z | Ports 1 & 2 | 3/4" Code 62 |
| W6Z | Ports 3 & 4 | SAE 6 |

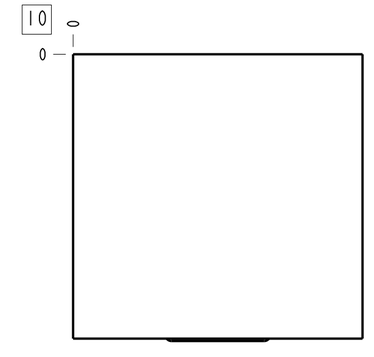


| ITEM | PART NO. | SETTING | MATERIAL | PART NAME | QTY |
|---|---|---|---|---|---|
| 2 | 500-001-214 | | N-0674-70 | O-RING | 1 |
| 1 | 154-514-001 | | 6061-T6 ALUMINUM | BODY | 1 |

| | | | | |
|---|---|---|---|---|
| MODEL: W6Z | ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE | | FIRST ANGLE / THIRD ANGLE | |
| DESCRIPTION: T-24A Line mount 0.75 SAE C62 Direct mount | DATE: Feb-28-24 | SCALE: 0.706 | DWG SIZE: C | SHEET: 1 |

sun hydraulics