



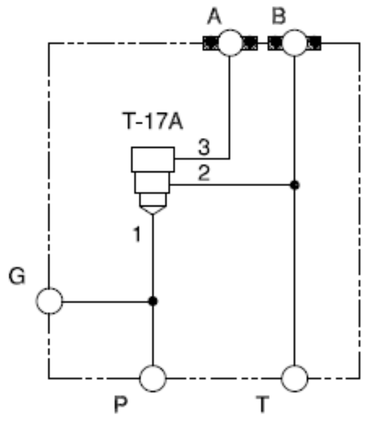



Technical Data	U.S. Units	Metric Units
Cavity	T-17A	
Body Features	Priority flow control on P, bypass to T	
Body Type	Motor mount	
Interface	Danfoss OMP/OMR	
Open Cavity Quantity	1	
Weight	4.277 lb.	1,940 kg.
Maximum Operating Pressure - 6061-T651 Aluminum	3000 psi	210 bar
Maximum Operating Pressure - 65-45-12 Ductile Iron	5000 psi	350 bar

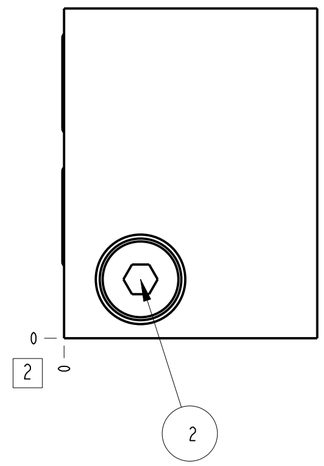


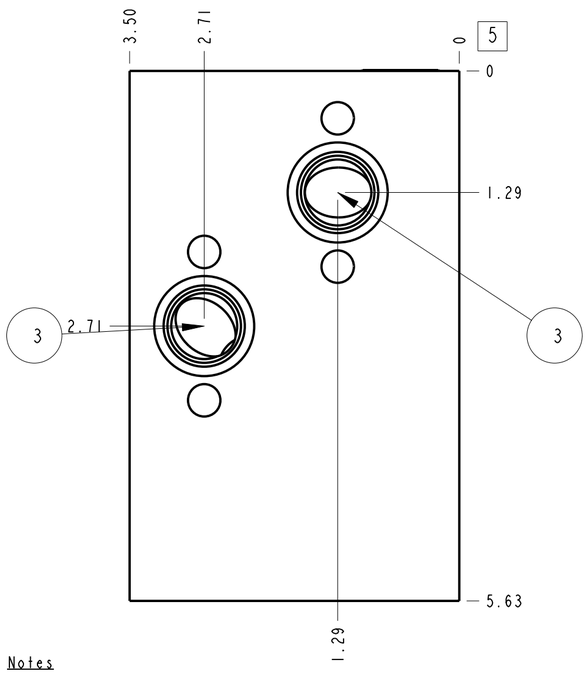

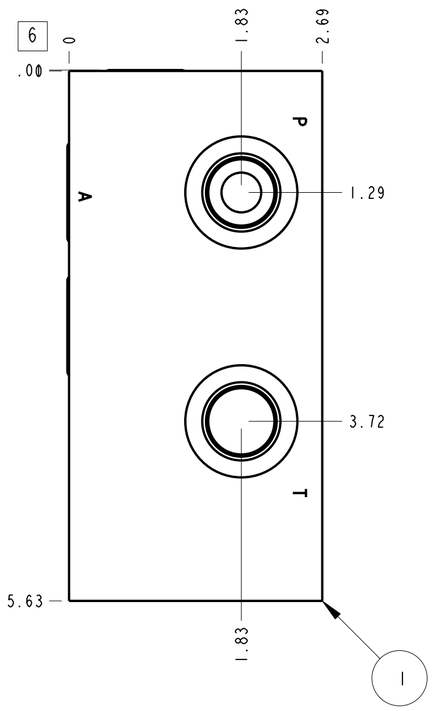

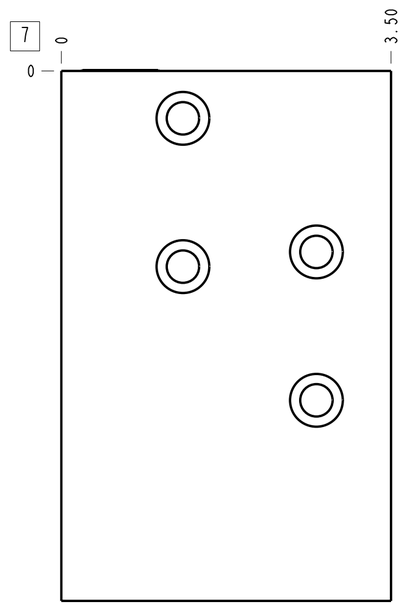

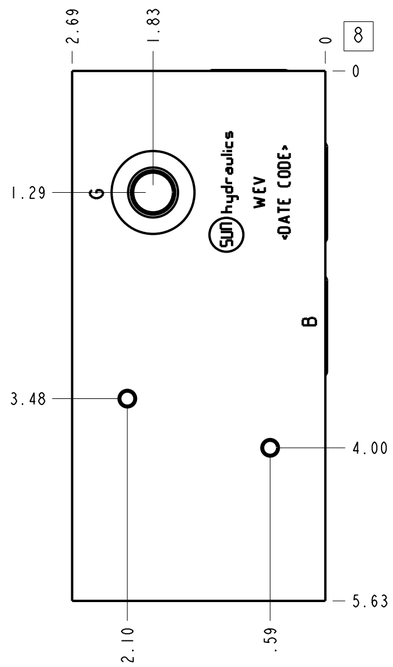

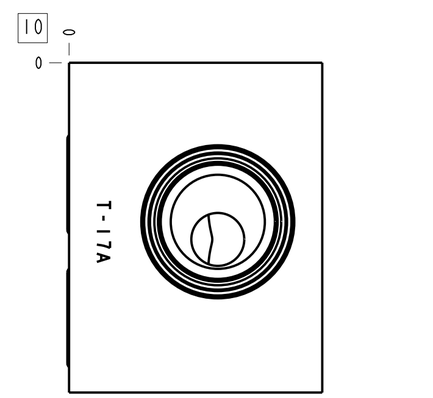

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
WEV	Ports P & T	1/2" BSPP
WEV	Port G	1/4" BSPP

ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
3	500-001-118		N-0674-70	O-RING	2
2	330-018-003			PLUG	1
1	152-131-005		6061-T6 ALUMINUM	BODY	1

MODEL: WEV	ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE			FIRST ANGLE / THIRD ANGLE
DESCRIPTION: T-17A Motor mount Danfoss OMP/OMR Priority flow control on P, bypass to T	DATE: Aug-03-23	SCALE: 0.804	DWG SIZE: C	SHEET: 1

sun hydraulics